


CURZIO



CURZIO | Industrial Light

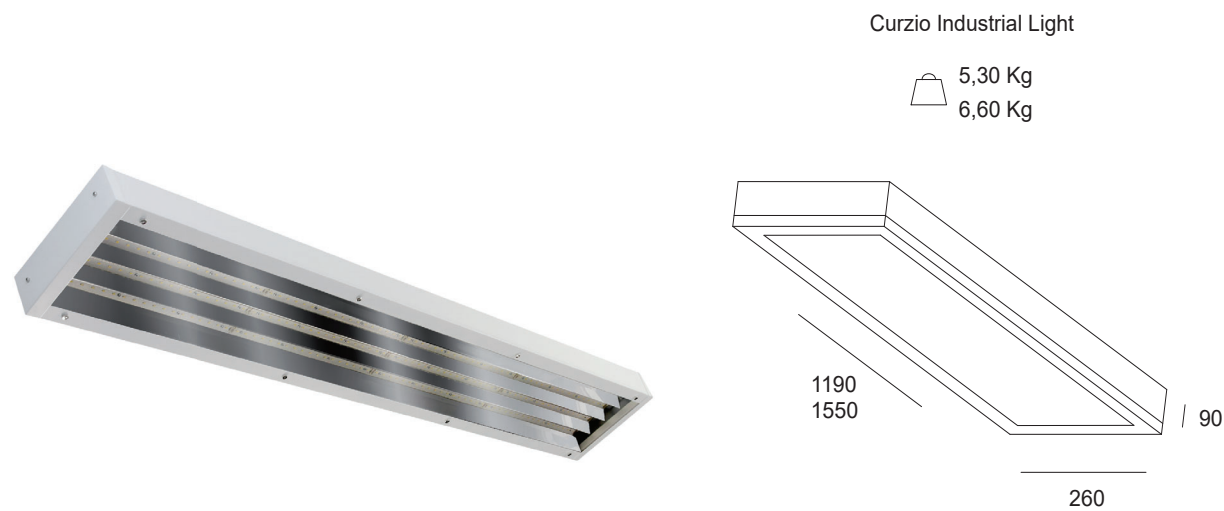

APPLICATIONS

- Interior lighting fixture for production areas, industrial, commercial, and exhibition spaces.
- Certified for use from -20°C to +40°C.
- For specific applications, please contact our technical department.


MECHANICS

- Body made of press-formed anodized aluminum sheet metal.
- Powder-coated for high resistance to atmospheric agents and UV rays.
- LED module specially designed to ensure maximum performance and efficiency.
- Aluminum reflector, anodized and polished to ensure high light output.
- Diffused, medium, and narrow beam options.
- Tempered safety glass (5mm thick) resistant to thermal shock and impact.
- All fastenings are made with stainless steel screws with a high molybdenum content of 2.5-3%.
- IK07 impact protection.
- IP55 protection - protected from dust and water jets.
- Insulation class I.


ALIMENTATIONS

- Electronic power supply integrated into the fixture body.
- Available in standard (ON-OFF), dimmable (DALI), and dimmable (PSUH-DIM) versions.
- Power supply: 220-240 VAC 50/60 Hz.
- 3/5-pole terminal block.

CURZIO Industrial Light									
Light source	Watt LED*	Lumen LED	Lumen OUT**	Energy rating***	Emission	Power supply	K	Colour	
LED	33W	6483	5072	B A ↑ G	CONCENTRANTING AVERAGE DIFFUSING	ON-OFF DALI PUSH-DIM	4000K		White
LED	45W	8432	6600	B A ↑ G					
LED	62W	11278	8775	C A ↑ G					
LED	66W	12966	10144	B A ↑ G					
LED	90W	16864	13200	B A ↑ G					
LED	124W	22556	17550	C A ↑ G					
Standby Power: 0 Mains Standby Power: 0 Power Supply: 230 Vac 50Hz *LED Power **Total Luminaire Output Flux @Tamb 25° - 4000°K ***This product contains a light source with Energy Efficiency Class B, C Consider an 8% reduction in output flux for 3000°K LED sources, and 10% for CRI>90 LED sources									



LED source replaceable only by a qualified technician.



Power supply replaceable only by a qualified technician.