



SVEN

SVEN | incasso carrabile



LED luminaire for recessed lighting, which can be installed on the floor using the formwork (supplied as an accessory), suitable for enhancing pedestrian paths, green areas and outdoor areas of particular architectural value. Main body in billet aluminum, anodized and subsequently powder coated to provide high resistance to atmospheric agents and UV rays, acts as a radiant surface and guarantees optimal heat dissipation. Tempered glass diffuser with satin “frost” effect designed to reduce glare (15mm thick) inserted by pressure into the lamp body and held in position by resin; the coplanar position with the body of the appliance to allow water and dirt to flow out, avoiding the formation of deposits that would significantly reduce the performance of the appliance.


Source
DOB LED module specially designed to ensure maximum uniformity.

Optics
Roto-symmetrical optic (see table on the side) protected by a glass screen with a “frost” satin effect designed to reduce glare.

Power supply
Electronic ballast not supplied. 12Vdc power supply.


Note
The product is supplied with a single cable gland and outgoing power supply cable L = 800mm in 2x0.75mm² neoprene. The correctly installed device guarantees resistance to a static load of 2000kg. IP67 protection both on the product and on the cable using IP67 connectors. We recommend the use of the SPD protection device, supplied by us upon request.

Accessories
Electronic ballasts available in the standard version (on-off), for single or multiple installations. Formwork for installation.

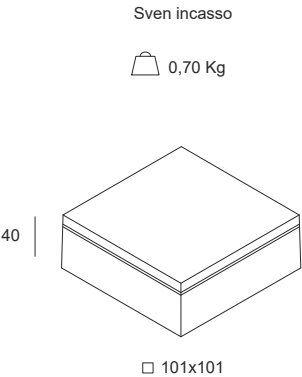


SVEN incasso carrabile							
Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	1W	100	F A G	3.000° K 4.000° K	ON-OFF	Wide flood (110°)	white

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 12Vdc
*LED power **Total flow exiting the appliance @Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source F
Consider a reduction in output flow dell'8% by source LED 3000°K



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician



Alimentatore sostituibile
Power supply replaceable

Richiedere il manuale di sostituzione ai nostri uffici tecnici


Connectors



Socket-plug



3-way “T” type

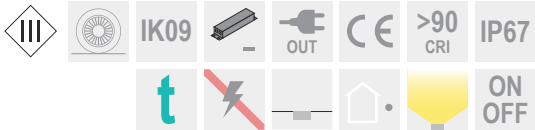

On demand:



For updated technical data or further technical information, consult the website (www.xlitesrl.it)

