



MOLLY

XLITE STAFF

MOLLY | profilo



LED linear profile for wall and ceiling installation using special brackets (supplied), suitable for illuminating elevations and facades, creating lighting effects of great value, useful for enhancing architecture. Body in extruded aluminum, with die-cast aluminum end caps complete with silicone gaskets. Acrylic paint with high resistance to atmospheric agents and UV rays. Optical compartment closed at the top by a tempered and silk-screened extra-clear glass screen (3mm thick) fixed by resin to avoid the formation of deposits that would significantly reduce the performance of the luminaire. Stainless steel screws with a high molybdenum content. Annealed silicone sealing gaskets.


Source
LED Chip On Board (COB) technology.

Optics
Roto-symmetrical optics available in various openings (see table opposite) treated by high vacuum metallization and protected by a tempered extra-clear safety glass screen.


Power supply
Electronic ballast not supplied. 24Vdc power supply.

Note
The product is supplied with a single cable gland and outgoing power cable with length L = 1000mm in 2x0.75mm² neoprene. IP67 protection both on the product and on the cable using IP67 connectors. Stainless steel installation supports provided.

Accessories
Electronic ballasts available in standard (on-off) and dimmable (DALI) versions, for single or multiple installations.




Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician



Alimentatore sostituibile
Power supply replaceable

Request the replacement manual from our technical offices

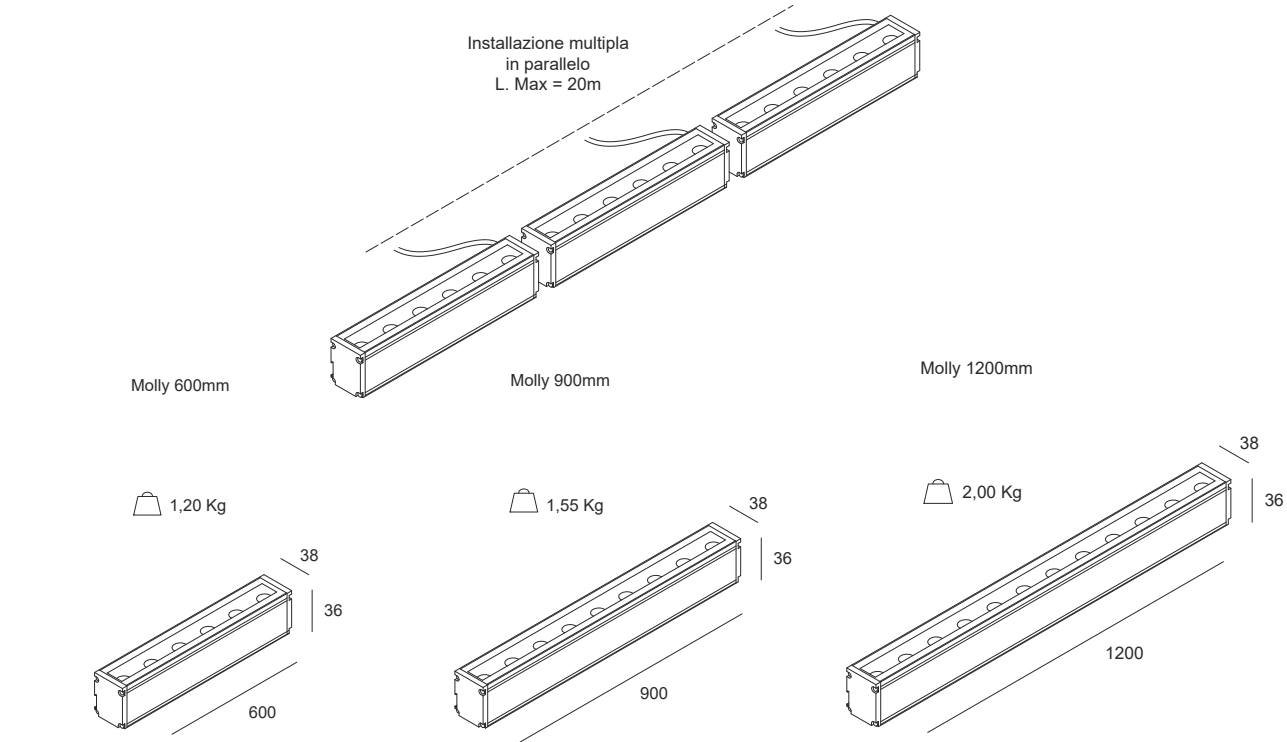


MOLLY profilo									
Sorgente Light source	Watt LED*	Lumen OUT**	L Lunghezza L Lenght	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour	
6 LED	6W	620	600 mm	F A ↑ G	3.000°K 4.000°K	ON-OFF	Spot (20°) Medium (40°) Wide (60°) Wall washer		white
9 LED	9W	930	900 mm	F A ↑ G					grey
12 LED	12W	1240	1200 mm	F A ↑ G					black

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 24Vdc
*LED power **Total flow exiting the appliance @ Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source F
Consider a reduction in output flow dell'8% by source LED 3000°K

Staffe fissaggio

Coppia staffe di fissaggio a soffitto

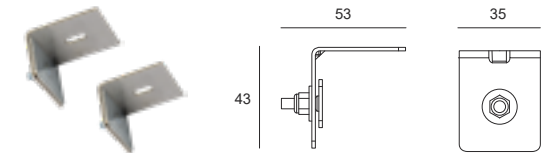

Connectors

