



SIMPLY

SIMPLY | applique




LED luminaire with direct / indirect light emission for wall installation. Rectangular body, made of aluminum and powder coated. Standard sizes 250mm, 500mm and 1000mm. Wall lamp particularly suitable for lighting halls, private residences, multifunctional environments or offices. The extremely minimal design makes the device light and extremely versatile for various movements.

Source
LED designed to ensure maximum uniformity.


Optics
Roto-symmetrical emission (see table opposite) protected by an opal methacrylate anti-glare screen designed to reduce glare.

Power Supply
Electronic ballast integrated in the luminaire body, available in standard (on-off) and dimmable (DALI) versions. Power supply 220-240Vac 50 / 60Hz.



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician


Request the replacement manual from our technical offices



Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician


Simply maxi applique 1000mm

4,70Kg

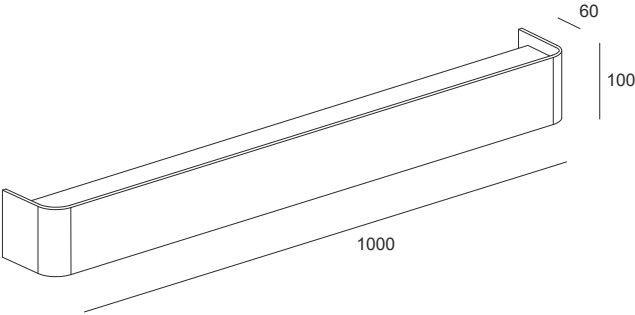


Simply mini applique 250mm

1,25 Kg



Simply medium applique 500mm

2,40 Kg

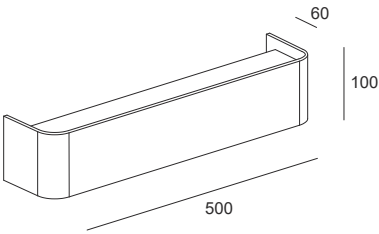

SIMPLY applique								
Sorgente Light source	Watt LED*	Lumen OUT**	L Lunghezza L Lenght	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	16W	1650	250 mm		3.000° K 4.000° K	ON-OFF On demand DALI	Doppia emissione	white
LED	32W	3024	500 mm					grey
LED	80W	7560	1000 mm					black corten

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @ Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source **C**
Consider a reduction in output flow dell'8% by source LED 3000°K, e del 10% by source LED CRI>90



On demand:



SIMPLY IP | applique



Double emission LED fixture (uplight + downlight) for wall installation, suitable for enhancing elevations and cladding materials, the minimal design allows integration with any type of architecture. Body made of anodized aluminum alloy and subsequently powder coated to provide high resistance to atmospheric agents and UV rays. Diffusers in satin-finish tempered glass fixed by resin in a coplanar position to the body of the appliance to allow water and dirt to flow away, avoiding the formation of deposits which would significantly reduce the performance of the appliance. Wall fixing system using an aluminum alloy plate treated and painted in the same way as the lamp body. Can be installed on any flat surface by dowelling. Screws in stainless steel with a high molybdenum content. Sealing gaskets in annealed silicone.

Source
LED modules specially designed to ensure maximum uniformity and the total absence of point light.


Optics
Double roto-symmetrical emission (see table alongside), protected by satin-finish tempered glass screens.

Power Supply
Electronic ballast integrated in the body of the fixture, available in the standard version (on-off). Power supply 220-240Vac 50/60Hz.

Note
We recommend the use of the SPD protection device, supplied by us upon request.


Simply IP applique 300mm

1,70 Kg



Simply maxi IP applique 550mm

3,30 Kg

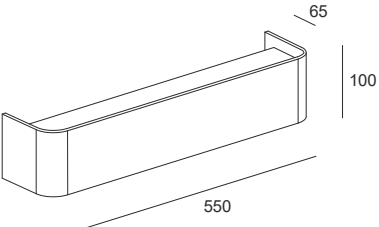


SIMPLY IP applique								
Sorgente Light source	Watt LED*	Lumen OUT**	L Lunghezza L Lenght	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	7W	667	300 mm		3.000° K	ON-OFF	Doppia Emissione	white
LED	20W	1517	550 mm					anthracite

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @ Tamb 25° - 3000°K ***This product contains an Energy Efficiency Class light source **D**

Connectors




Connectors IP




Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician

Request the replacement manual from our technical offices



Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician

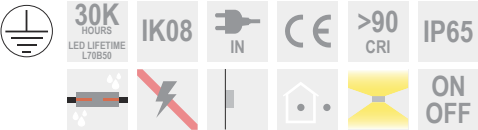

On demand:

