



TOBAGO

TOBAGO | proiettore da esterno




LED floodlight for ground installation (by means of a spike supplied) and wall (by anchoring), suitable for illuminating outdoor areas, gardens and car parks. Lamp body made of anodized aluminum alloy and subsequently powder coated to provide high resistance to atmospheric agents and UV rays, acts as a radiant surface and guarantees optimal heat dissipation. The projector can be adjusted in the vertical plane $\pm 90^\circ$ by means of a painted steel bracket equipped with mechanical locks that guarantee stable aiming of the light beam. Extra-clear front protective glass (5mm thick) tempered and silk-screened, fixed by resin, in a coplanar position with the body of the appliance to allow dirt to drain, avoiding the formation of deposits that would significantly reduce the performance of the appliance. Stainless steel screws with a high molybdenum content. Annealed silicone sealing gaskets.

Source
LED Chip On Board (COB) technology.

Optics
Roto-symmetrical optics (see table opposite) treated by high vacuum metallization and protected by a tempered extra-clear safety glass screen fixed by resin.


Power supply
Electronic ballast integrated in the body of the fixture for the maxi version, 12-24 Vdc external power supply for Tobago, available in the standard version (on-off). Power supply 220-240Vac 50/60Hz.

Note
IP65 protection.
We recommend the use of the SPD protection device, supplied by us upon request.

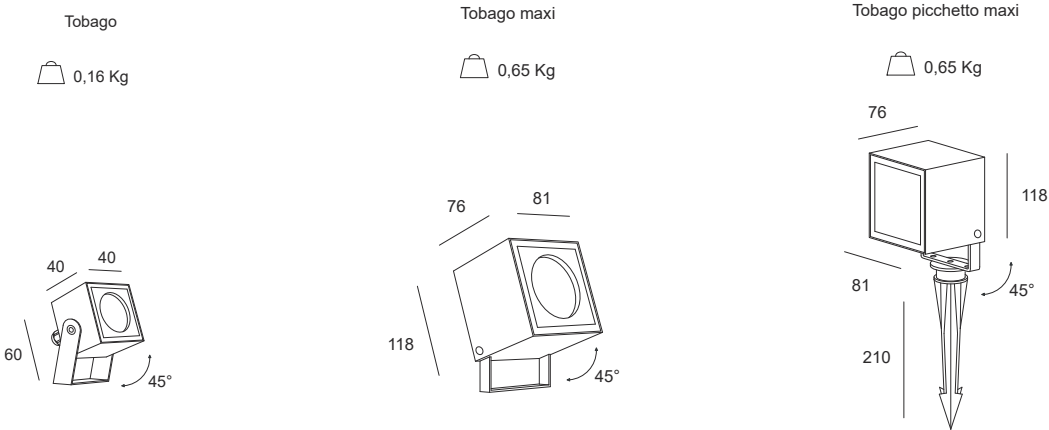


TOBAGO proiettore da esterno								
Sorgente Light source	Watt LED*	Lumen OUT**	L Lunghezza L Lenght	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
COB LED	1W	90	60 mm	E	3.000° K	ON-OFF	Medium (30°)	anthracite
	10W	656	118 mm	D				


P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz / 12-24Vdc
*LED power **Total flow exiting the appliance @ Tamb 25° - 3000°K ***This product contains an Energy Efficiency Class light source **D, E**

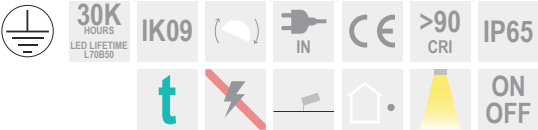

On demand:



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician



Alimentatore non sostituibile
Non-replaceable power supply

Request the replacement manual from our technical offices





