




ECO XL

ECO XL INTENSIVE | Waterproof Light

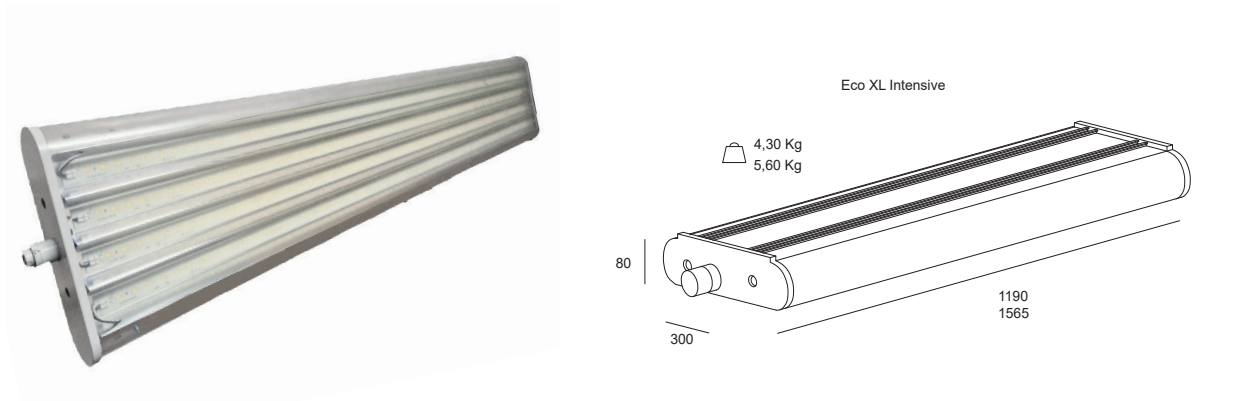

On request:

APPLICATIONS


- Interior lighting fixture for production areas, industrial environments, warehouses, and utility rooms.
- Suitable for automated warehouses and industrial buildings.
- Fixtures suitable for use in the food industry (HACCP).
- Certified for use from -20°C to +35°C.
- For specific applications, please contact our technical department.

MECHANICS


- Satin-finish polycarbonate lamp body.
- Single-piece body with high luminous efficiency, V2 self-extinguishing, and UV-stabilized.
- LED modules specially designed to ensure maximum performance and efficiency.
- Aluminum reflector, anodized and polished to ensure high luminous efficiency and excellent heat dissipation for maximum LED life and efficiency.
- Diffused light emission.
- All fastenings are made with stainless steel screws with a high molybdenum content (2.5-3%).
- Annealed silicone gaskets.
- Complete with male/female quick-release connector.
- IK09 impact protection.
- IP65 protection - dustproof and protected from water jets.
- Insulation class I.

ALIMENTATIONS

- Electronic power supply integrated into the fixture body.
- Available in standard (ON-OFF), dimmable (DALI), and (PUSH-DIM) versions.
- Power supply: 220-240 VAC 50/60 Hz.
- 3/5-pole terminal block.



LED source replaceable only by a qualified technician.



Power supply replaceable only by a qualified technician.

ECO XL INTENSIVE | Waterproof Light

Relamping	Watt LED*	Lumen LED	Lumen OUT**	Energy rating***	L Lenght	Power supply	K	Colour
4x28 / 4x36	65W	13100	7100	B	1190 mm	ON-OFF DALI PUSH-DIM	3000K 4000K 6000K	Grey
6x36	87W	16678	9398	B				
1xJM150	99W	18090	11010	C				
4x49 / 4x58	87W	17350	9490	B	1565 mm			
6x58	116W	22280	12510	B				
4x80	133W	24110	14680	C				

Standby Power: 0 | Mains Standby Power: 0 | Power Supply: 230 Vac 50Hz
*LED Power **Total Luminaire Output Flux @Tamb 25° - 4000°K ***This product contains a light source with Energy Efficiency Class B, C
Consider an 8% reduction in output flux for 3000°K LED sources, and 10% for CRI>90 LED sources

Type Accessories	Description
	Suspension cable 2 m hook and fastener (2 pieces required per lamp)
	Theft protection (required for wall mounting), set for 1 luminaire
	ZBWM wall mounting accessory (allows luminaire rotation), 2 pieces set
	Fixing clips in stainless steel 316L, 2 units

