




EDI





EDI | Pendant

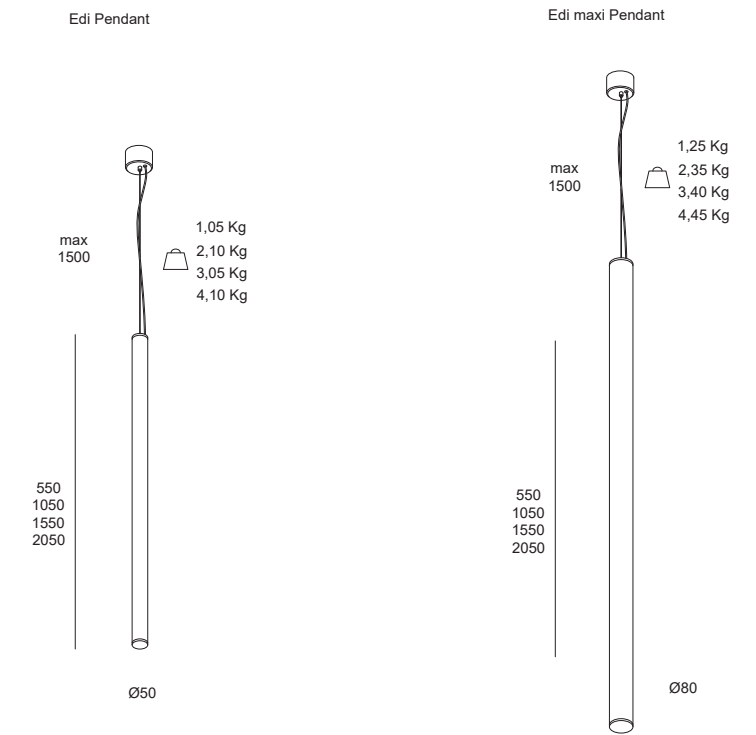

EDI Pendant				
Watt*	Lumen**	øDiameter mm	K	Emission
14W	2000	50	3000 K 4000 K	Wide (360°)
28W	4000			
42,5W	6000			
58W	8000			
22W	3000	80		
43,5W	6000			
65W	9000			
87W	12000			
Standby Power: 0 Mains Standby Power: 0 Power Supply: 230 Vac 50Hz *LED Power **Total Luminaire Output @Tamb 25° - 4000°K Consider an 8% reduction in output flux for 3000°K LED sources				

Colours



Charateristics



