



ETA

ETA | incasso orientabile




Recessed, adjustable and extractable LED luminaire, easy to install using a spring system, suitable for illuminating exhibition spaces, shops and shop windows. Die-cast aluminum body, powder coated, with 170mm diameter for the 23W version. Passive dissipation system by die-cast aluminum. Body adjustability from 0 ° to 90 ° on the vertical plane and 350 ° on the horizontal one, the aiming is blocked by friction.

Source
LED Chip On Board (COB) technology. 23W @ 700mA


Optics
Roto-symmetrical optics available in various openings (see table alongside) treated by high vacuum metallization and protected by a tempered glass screen.

Power supply
Electronic power supply supplied connected to the fixture, available in the standard (on-off) and dimmable (DALI) version. Power supply 220-240Vac 50 / 60Hz.

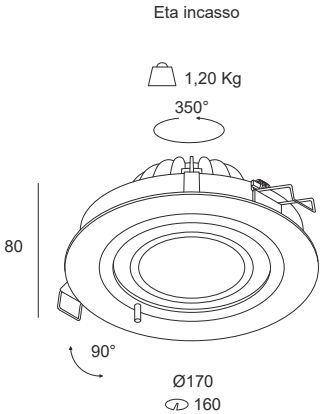


ETA incasso orientabile								
Sorgente Light source	Watt LED*	Lumen OUT**	ØDiametro mm ØDiameter mm	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
COB LED	25W	2700	170	E A G	3.000° K 4.000° K	ON-OFF On demand DALI	Spot (15°) Medium (35°) Wide (70°)	white grey black

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 700mA
*LED power **Total flow exiting the appliance @ Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source E
Consider a reduction in output flow dell'8% by source LED 3000°K, e del 10% by source LED CRI>90




Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician

Request the replacement manual from our technical offices



Alimentatore sostituibile
Power supply replaceable

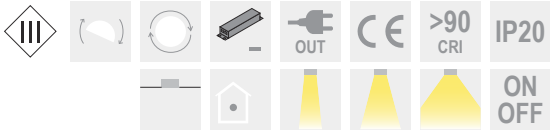

On demand:



For updated technical data or further technical information, consult the website (www.xlitesrl.it)