



NIZZA

NIZZA | applique




Double emission LED luminaire (uplight + downlight for the 500mm version, and downlight for the 250mm version) for wall installation, suitable for enhancing elevations and covering materials, the minimal design allows integration with any type of architecture. Body made of anodized aluminum alloy and subsequently powder coated to provide high resistance to atmospheric agents and UV rays. Diffusers in frosted tempered glass fixed by resin in a coplanar position with the body of the fixture to allow water and dirt to flow, avoiding the formation of deposits that would significantly reduce the performance of the fixture. Wall fixing system by means of an aluminum alloy plate treated and painted the same as the lamp body. Can be installed on any flat surface by anchoring. Stainless steel screws with a high molybdenum content. Annealed silicone sealing gaskets.

Source
LED modules specially designed to ensure maximum uniformity and the total absence of point light.

Optics
Double roto-symmetrical emission (see table opposite), protected by frosted tempered glass screens, mono-emission on request.

Power supply
Electronic power supply integrated in the body of the fixture, available in the standard version (on-off). Power supply 220-240Vac 50 / 60Hz.

Note
We recommend the use of the SPD protection device, supplied by us upon request.

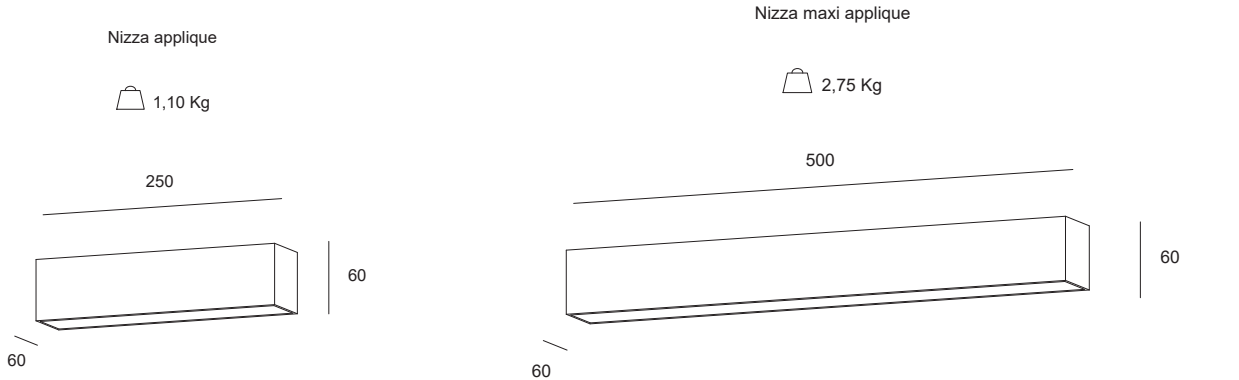


NIZZA applique								
Sorgente Light source	Watt LED*	Lumen OUT**	L Lunghezza L Lenght	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	7W	667	250 mm		3.000° K	ON-OFF	Mono-emissione	white anthracite
LED	20W	1517	500 mm				Doppia Emissione A richiesta mono-emissione	

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @ Tamb 25° - 3000°K ***This product contains an Energy Efficiency Class light source D

Connectors




Connectors IP




Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician

Request the replacement manual from our technical offices



Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician

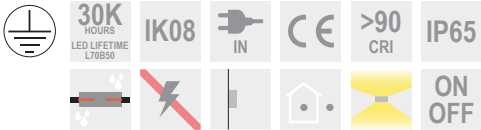

On demand:



