



PIATTA

PIATTA | applique



LED luminaire with indirect light emission for wall installation. Rectangular body, made of die-cast aluminum and powder coated. Wall lamp particularly suitable for illuminating private residences, commercial activities or exhibition spaces. The minimal design makes the device light and extremely versatile for various uses.


Source
LED modules specially designed to ensure maximum uniformity and the total absence of point light.

Optics
Rotosymmetric emission (see table alongside) protected by an opal methacrylate anti-glare screen designed to reduce glare.

Power Supply
Electronic ballast integrated in the body of the fixture, available in the standard version (on-off). Power supply 220-240Vac 50/60Hz.


Piatta applique

0,80 Kg




Piatta maxi applique

1,20 Kg

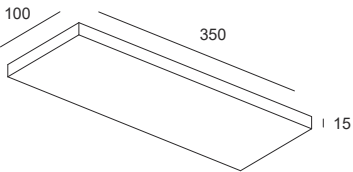


PIATTA applique								
Sorgente Light source	Watt LED*	Lumen OUT**	L Lunghezza L Lenght	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
COB LED	25W	1400	200mm		3.000° K	ON-OFF	Wide (70°)	 white
COB LED	35W	2200	350mm					 black
								 gold
								 silver

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @ Tamb 25° - 3000°K ***This product contains an Energy Efficiency Class light source **G**
Consider a reduction in output flow dell'8% by source LED 3000°K



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician

Request the replacement manual from our technical offices



Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician



