



STUD

STUD | incasso carrabile



Recessed lighting fixture, which can be installed on the floor using a special housing (available as an accessory). Particularly suitable for indoor or outdoor lighting of stairs, ramps and corridors. Main body in billet aluminum, acts as a radiant surface and guarantees optimal heat dissipation. Aluminum protective cap machined from solid and subsequently powder coated to provide high resistance to atmospheric agents and UV rays. The device is fixed to the appropriate formwork (see drawings alongside), by means of special retaining gaskets that allow it to be locked.


Source
LED Chip On Board (COB) technology.

Optics
Directional optic available with different numbers of beams (see table opposite).


Power supply
Electronic ballast not supplied. Power supply 3W @ 700mA 3V.

Note
Outgoing power cable with length L = 400mm in 2x0.75mm² neoprene. The correctly installed device guarantees resistance to a static load of 2000kg. IP67 protection both on the product and on the cable using IP67 connectors. The product is not suitable for installation in swimming pools and fountains. We recommend the use of the SPD protection device, supplied by us upon request.

Accessories
Electronic ballasts available in the standard version (on-off), for single or multiple installations. Formwork for masonry installation.




Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician





Alimentatore sostituibile
Power supply replaceable

Request the replacement manual from our technical offices

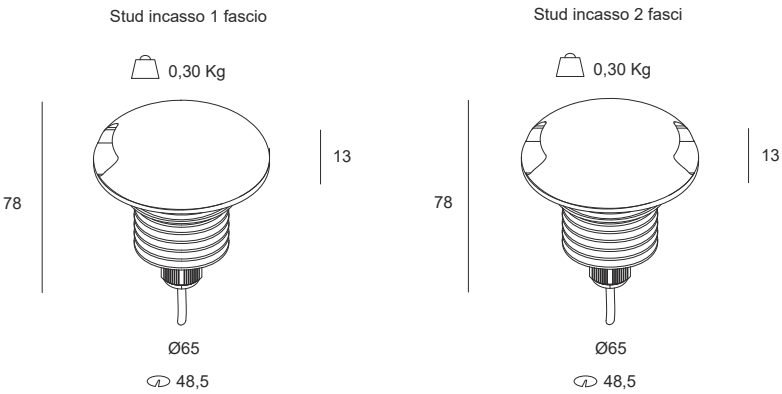

STUD incasso carrabile							
Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	3W	350		3.000° K	ON-OFF	1 FASCIO 2 FASCI	white grey black

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 700mA 3V
*LED power **Total flow exiting the appliance @ Tamb 25° - 3000°K ***This product contains an Energy Efficiency Class light source E

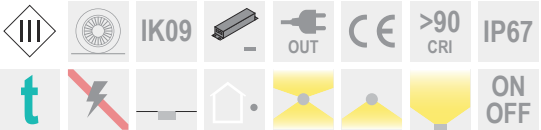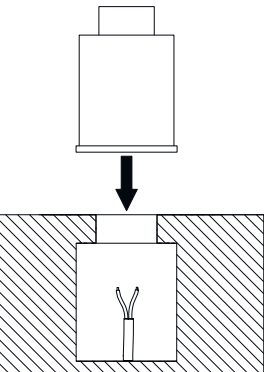

On demand:

SPD





STUD ORTOGONALE | incasso carrabile



Recessed lighting fixture, which can be installed on the floor using a special housing (available as an accessory). Particularly suitable for indoor or outdoor lighting of stairs, ramps and corridors. Main body in billet aluminum, acts as a radiant surface and guarantees optimal heat dissipation. Aluminum protective cap machined from solid and subsequently powder coated to provide high resistance to atmospheric agents and UV rays. The device is fixed to the appropriate formwork (see drawings alongside), by means of special retaining gaskets that allow it to be locked.


Source
LED Chip On Board (COB) technology.

Optics
Two-beam optics, horizontal and vertical.


Power supply
Electronic ballast not supplied. Power supply 3W @ 700mA 3V.

Note
Outgoing power cable with length L = 400mm in 2x0.75mm² neoprene. The correctly installed device guarantees resistance to a static load of 2000kg. IP67 protection both on the product and on the cable using IP67 connectors. The product is not suitable for installation in swimming pools and fountains. We recommend the use of the SPD protection device, supplied by us upon request.

Accessories
Electronic ballasts available in the standard version (on-off), for single or multiple installations. Formwork for masonry installation.





Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician




Alimentatore sostituibile
Power supply replaceable

Request the replacement manual from our technical offices

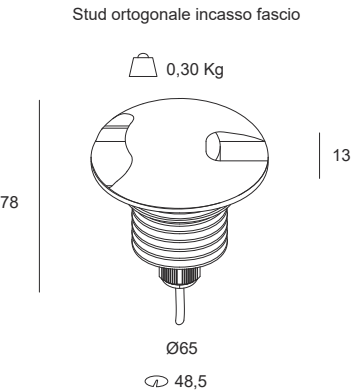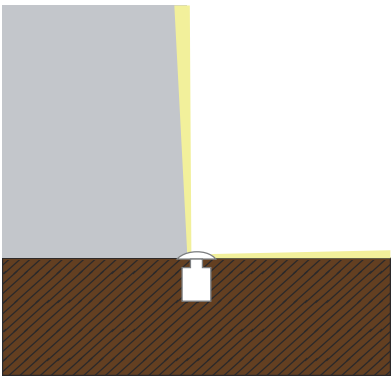

STUD ORTOGONALE incasso carrabile							
Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	3W	350		3.000° K	ON-OFF	2 FASCI (orizzontale, verticale)	white grey black

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 700mA 3V
*LED power **Total flow exiting the appliance @ Tamb 25° - 3000°K ***This product contains an Energy Efficiency Class light source E





Connectors



Socket-plug



3-way "T" type

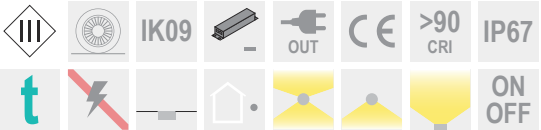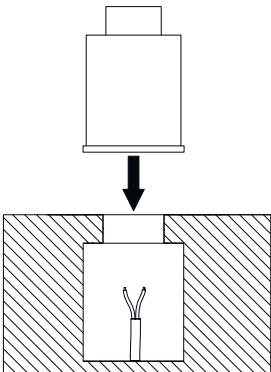

On demand:



