




VPX 5.5



VPX 5.5 | Street Light

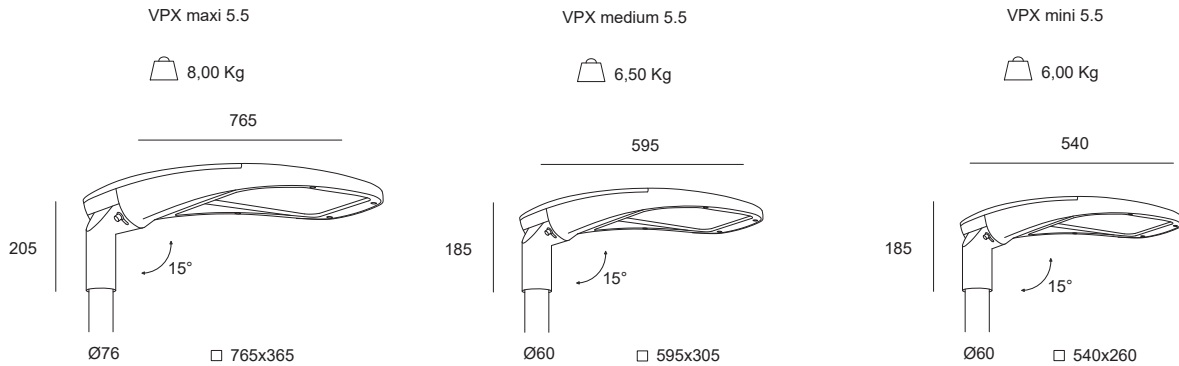

VPX 5.5 Street Light				
Watt*	Lumen**	L Length	Optics	K
26W	4062	540 mm	AS1 - Asymmetric 1 ST1 - Street 1 ST2 - Street 2	3000K 4000 K
47W	7923			
62W	10085			
70W	11459	595 mm		
99W	15936			
140W	23005			
93W	16002	765 mm		
134W	19004			
200W	30923			

Standby Power: 0 | Mains Standby Power: 0 | Power Int.: 230 Vac 50Hz
*LED Power **Total Luminaire Output @Tamb 25° - 4000°K

Colour



Charateristics



Connectors




Socket-plug



3-way "T" type


On request:

ST1




Lm Led/Lm Out:
Standard - **N** (4000 K)
-8% - **W** (3000 K)

ST2



Lm Led/Lm Out:
Standard - **N** (4000 K)
-8% - **W** (3000 K)

AS1




Lm Led/Lm Out:
Standard - **N** (4000 K)
-8% - **W** (3000 K)


VPX 5.5 ST2 - Street 2

Street Class	M1	M2	M3	M4	M5
Pole Distance (d)	24m	24m	24m	24m	24m
Light Emission	13600 lm	10400 lm	7200 lm	5600 lm	4000 lm
Pole Distance (d)	32m	32m	32m	32m	32m
Light Emission	UI*	UI*	8200 lm	7200 lm	4800 lm
Pole Distance (d)	40m	40m	40m	40m	40m
Light Emission	-	-	-	-	5600 lm

* Longitudinal uniformity not satisfied



Lm Led/Lm Out:
Standard - **N** (4000 K)
-8% - **W** (3000 K)


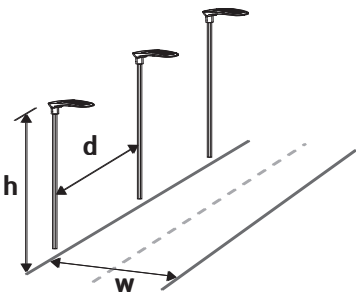


W= 8 m - H= 8m


VPX 5.5 ST1 - Street 1

Street Class	M1	M2	M3	M4	M5
Pole Distance (d)	24m	24m	24m	24m	24m
Light Emission	UI*	UI*	6400 lm	4800 lm	3200 lm
Pole Distance (d)	32m	32m	32m	32m	32m
Light Emission	-	-	UI*	UI*	4800 lm
Pole Distance (d)	40m	40m	40m	40m	40m
Light Emission	-	-	UI*	UI*	5600 lm

* Longitudinal uniformity not satisfied

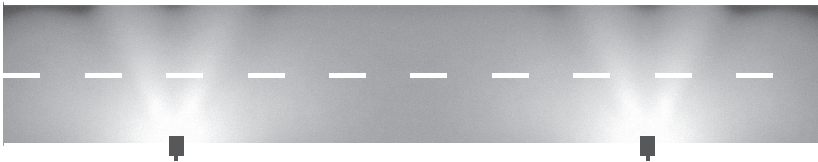

Lm Led/Lm Out:
Standard - **N** (4000 K)
-8% - **W** (3000 K)


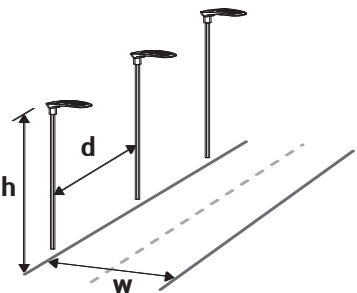


W= 8 m - H= 8m


VPX 5.5 AS1 - Asymmetric 1

Street Class	M1	M2	M3	M4	M5
Pole Distance (d)	24m	24m	24m	24m	24m
Light Emission	UI*	UI*	8800 lm	6400 lm	4800 lm
Pole Distance (d)	32m	32m	32m	32m	32m
Light Emission	UI*	UI*	10400 lm	8000 lm	5600 lm
Pole Distance (d)	40m	40m	40m	40m	40m
Light Emission	-	-	UI*	UI*	6400 lm




* Longitudinal uniformity not satisfied

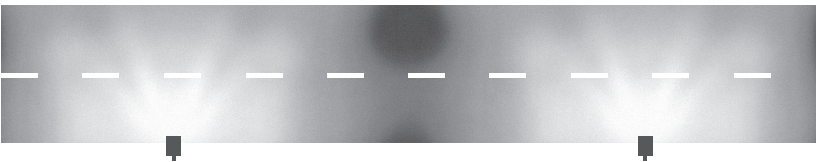


Lm Led/Lm Out:
Standard - **N** (4000 K)
-8% - **W** (3000 K)

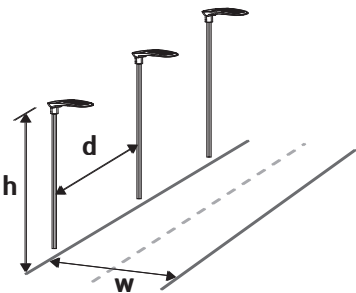


W= 8 m - H= 8m

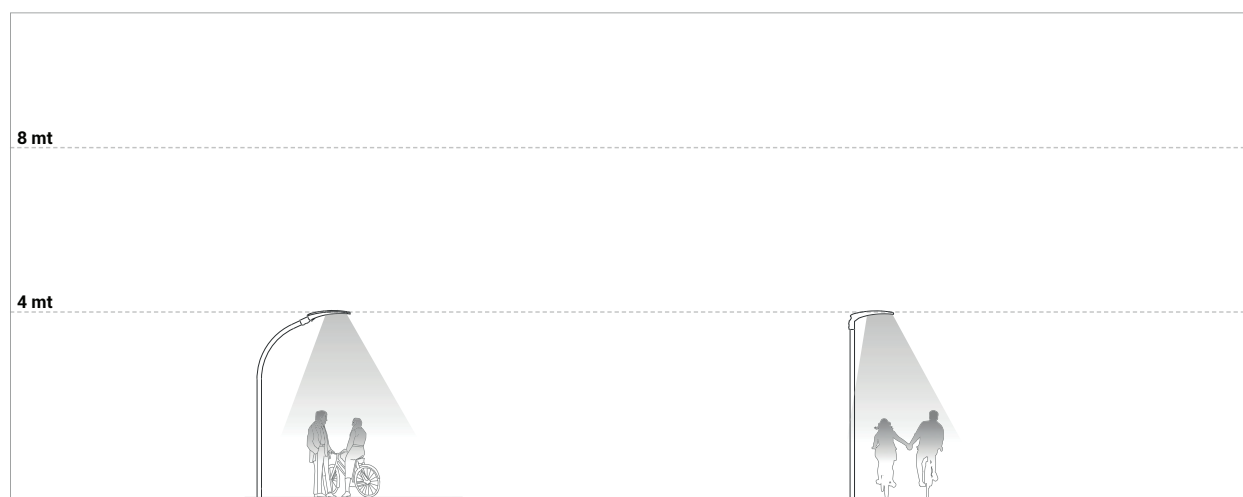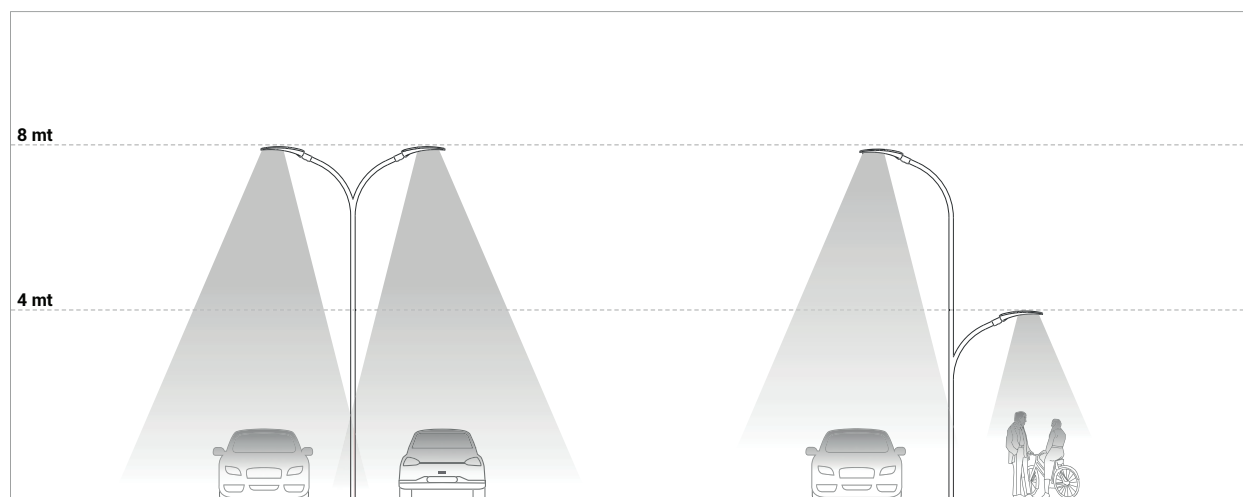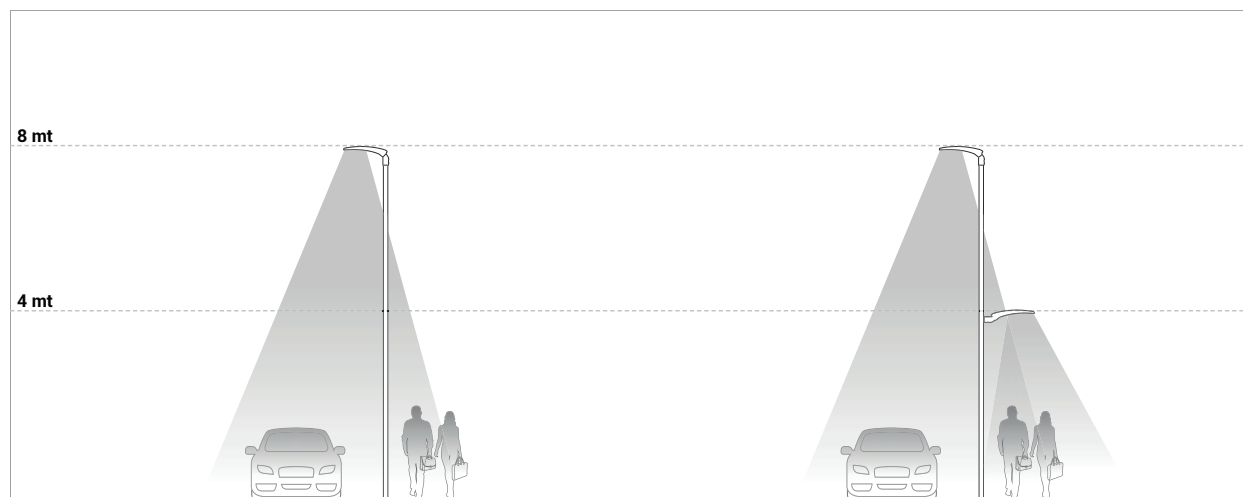


VPX ACCESSORIES

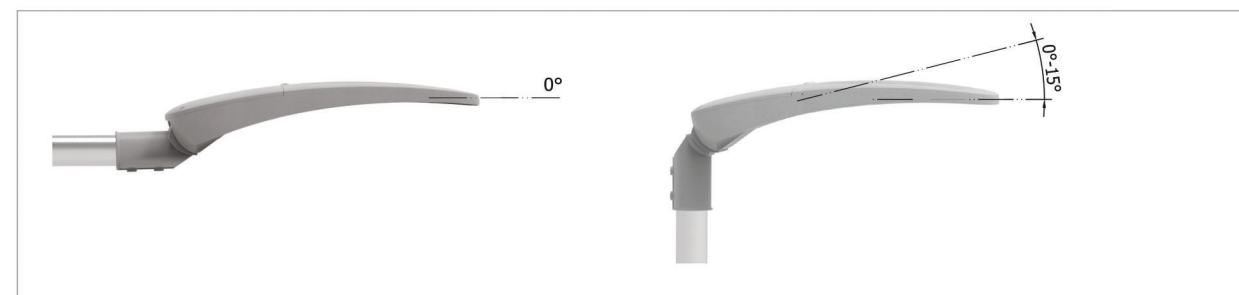

ACCESSORIES FOR SPECIAL INSTALLATIONS

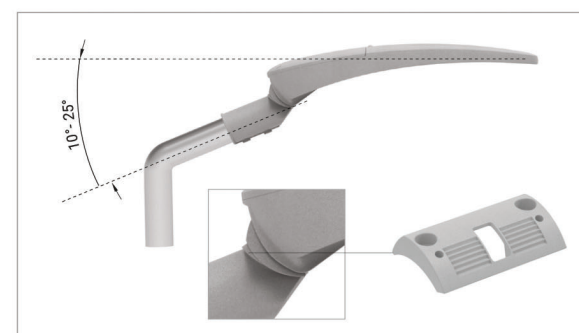

Adaptor for tilting (10° - 25°)

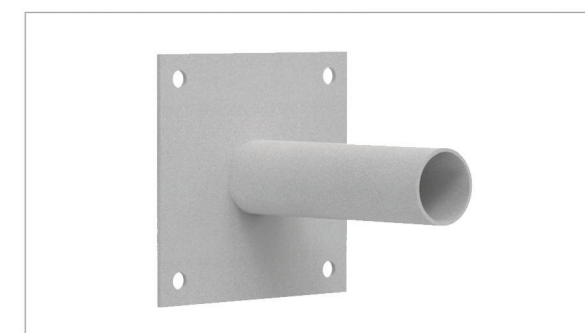

Support for wall mounting



Adaptor for pole (Ø 76mm)



3 poles quick plug-in kit for electrical connection