
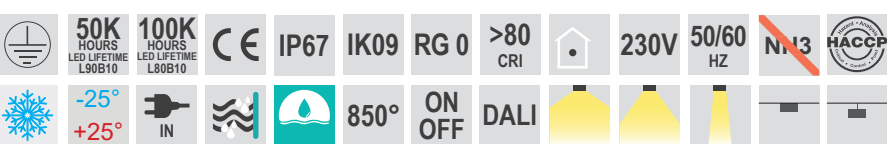


BIG ZINNAKIS BRIVIDO | Waterproof Industrial Light

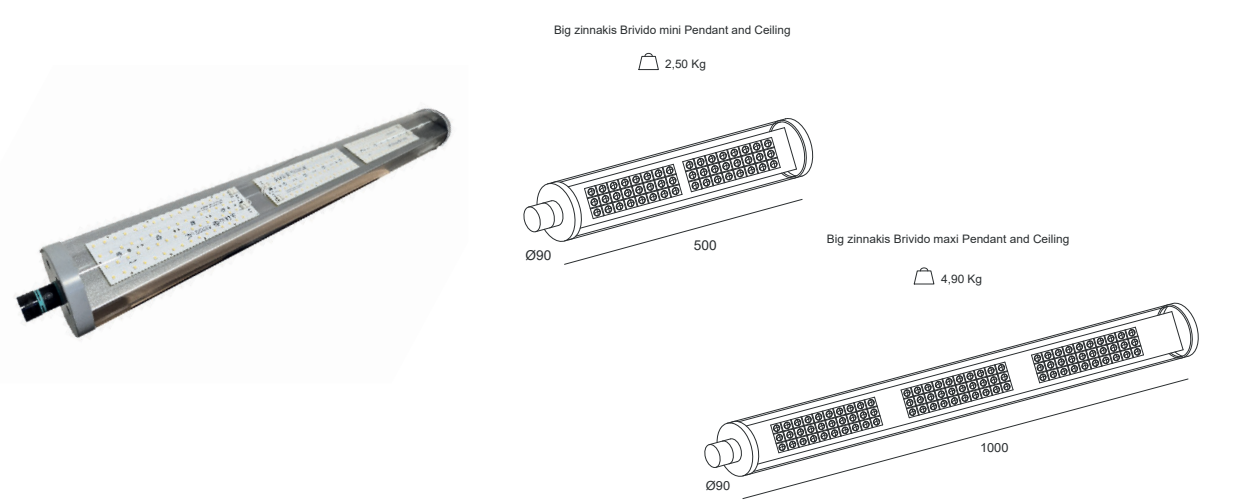

BIG ZINNAKIS BRIVIDO | Waterproof Industrial light for temperatures from -25°C to +25°C

Light source	Watt LED*	Lumen LED	Lumen OUT**	Energy rating***	L Lenght	Emission	Power Supply	K	Colour
LED	30W	5320	4788	C A G	590 mm	CONCENTRTING AVERAGE DIFFUSING	ON-OFF DALI	3000K 4000K 6000K	Grey
LED	60W	10640	9576	C A G	1090 mm				

Standby Power: 0 | Mains Standby Power: 0 | Power Supply: 230 Vac 50Hz
*LED Power **Total Luminaire Output Flux @Tamb 25° - 4000°K ***This product contains a light source with Energy Efficiency Class C
Consider an 8% reduction in output flux for 3000°K LED sources, and 10% for CRI>90 LED sources

APPLICATIONS


- Lighting fixture designed for use in cold rooms, refrigerated warehouses, blast chillers, refrigerated cellars, and outdoor environments with negative temperatures.
- Lighting fixture for production areas and industrial environments.
- Fixtures suitable for use in the food industry (HACCP).
- Certified for use from -25°C to +25°C.
- For specific applications, please contact our technical department.

MECHANICS


- Transparent extruded polycarbonate body.
- Die-bent aluminum internal frame with dissipative function.
- Self-extinguishing V0 polycarbonate end caps, injection-molded, with quick-connect connector.
- LED modules specially designed to ensure maximum performance and efficiency.
- Pendant or ceiling installation with the included brackets.
- All fastenings are made with 2.5-3% molybdenum-rich stainless steel screws.
- IK09 impact protection.
- IP67 protection - dustproof and protected against temporary immersion in water.
- Insulation class I.

ALIMENTATIONS

- Electronic power supply integrated into the fixture body.
- Available in Standard (ON-OFF) or Dimmable (DALI) versions.
- Power supply: 220-240 VAC 50/60 Hz.
- 3/5-pole terminal block.





LED source replaceable only by a qualified technician.



Power supply replaceable only by a qualified technician.

BIG ZINNAKIS BRIVIDO ESTREMO | Waterproof Industrial Light

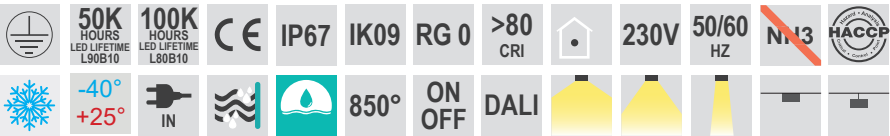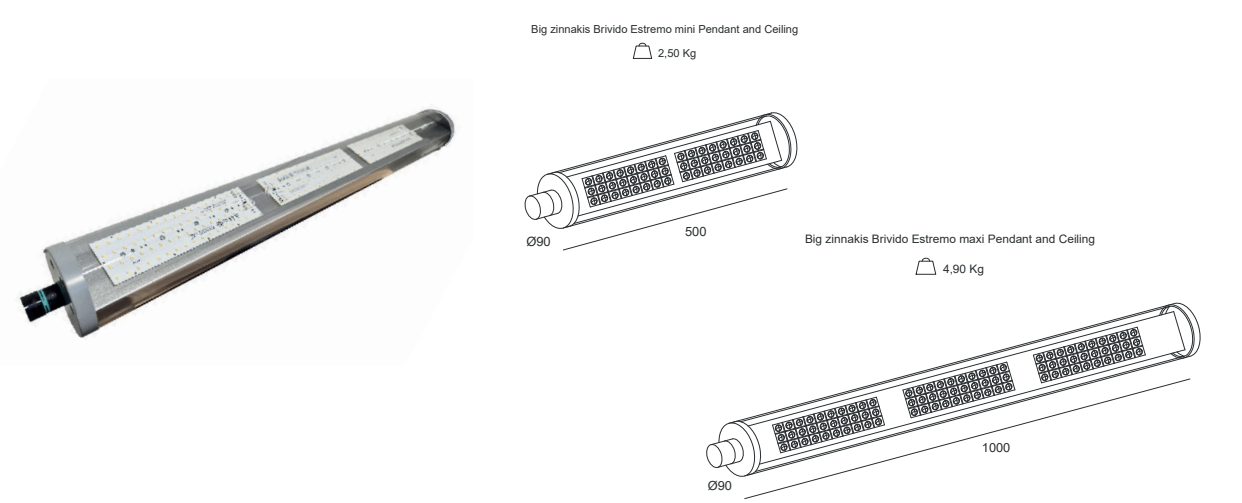

BIG ZINNAKIS BRIVIDO ESTREMO | Waterproof Industrial light for temperatures from -40°C to +25°C

Light source	Watt LED*	Lumen LED	Lumen OUT**	Energy rating***	L Lenght	Emission	Power Supply	K	Colour
LED	30W	5320	4788	C A G	590 mm	CONCENTRATING AVERAGE DIFFUSING	ON-OFF DALI	3000K 4000K 6000K	Grey
LED	60W	10640	9576	C A G	1090 mm				

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*Potenza dei LED **Flusso totale in uscita dall'apparecchio @Tamb 25° - 4000°K ***Questo prodotto contiene una sorgente luminosa di Classe di efficienza Energetica C
Considerare una riduzione del flusso in uscita dell'8% per sorgente LED 3000°K, e del 10% per sorgente LED CRI>90

APPLICATIONS

- Lighting fixture designed for use in cold rooms, refrigerated warehouses, blast chillers, refrigerated cellars, and outdoor environments with extreme negative temperatures.
- Lighting fixture for production areas and industrial environments.
- Fixtures suitable for use in the food industry (HACCP).
- Certified for use from -40°C to +25°C.
- For specific applications, please contact our technical department.

MECHANICS

- Transparent extruded polycarbonate body.
- Die-bent aluminum internal frame with dissipative function.
- Self-extinguishing V0 polycarbonate end caps, injection-molded, with quick-connect connector.
- LED modules specially designed to ensure maximum performance and efficiency.
- Pendant or ceiling installation with the included brackets.
- All fastenings are made with 2.5-3% molybdenum-rich stainless steel screws.
- IK09 impact protection.
- IP67 protection - Total protection from dust and protected against temporary immersion in water.
- Insulation class I.

ALIMENTATIONS

- Electronic power supply integrated into the IP67 fixture body.
- Available in Standard (ON-OFF) or Dimmable (DALI) versions.
- Power supply: 220-240 VAC 50/60 Hz.
- 3/5-pole terminal block.