


ECO ATEX 2 | For zone 2, 22



II 3G Ex ec IIC T6 Gc
II 3D Ex tc IIIC T85°C Dc

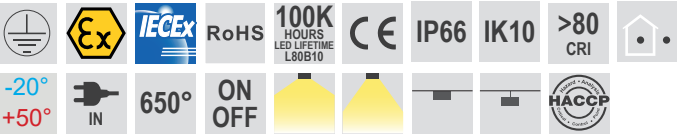

On request:



APPLICATIONS


- Certified for use in environments with temperatures from -20°C to +50°C with the rare presence of gas and dust.
- Equipment suitable for use in the food industry (HACCP).
- Suitable for environments in ATEX Zone 2 and Zone 22.
- For specific applications, please contact our technical department.

MECHANICS


- Fiberglass-reinforced compressed polyester (GRP) in gray or yellow upon request.
- Transparent injected polycarbonate diffuser with UV protection.
- Prismatic optics for optimal light distribution.
- Medium, diffused emission.
- All fastenings are made with 2.5-3% molybdenum-rich stainless steel screws.
- Complete with two plastic cable glands and a 0.5-1m long output cable.
- IK10 impact protection.
- Insulation class I.
- IP66 protection - dustproof and protected from water jets.

ALIMENTATIONS

- Electronic power supply integrated into the fixture body.
- Available in the Standard version (ON-OFF) with an emergency kit upon request.
- Power supply: 220-240 VAC 50/60 Hz.
- 3-pole terminal block.



LED source replaceable only by a qualified technician.



Power supply replaceable only by a qualified technician.

ECO ATEX ZONA 2,22 | ATEX waterproof light with temperatures from -20°C to +50°C

Light source	Watt LED*	Lumen LED	Lumen OUT**	L Lenght	Emission	Power Supply	K	Diffuser	Colours
LED	15W	2160	1771	670 mm	AVERAGE DIFFUSING	ON-OFF	4000K 5000K	PC TRANSPARENT	 Grey
LED	25W	4320	3542	1275 mm					 Yellow
LED	38W	6480	5313	1585 mm					

Standby Power: 0 | Mains Standby Power: 0 | Power Supply: 230 Vac 50Hz
*LED Power **Total Luminaire Output Flux @Tamb 25° - 4000°K ***This product contains a light source with Energy Efficiency Class C
Consider an 8% reduction in output flux for 3000°K LED sources, and 10% for CRI>90 LED sources

Type Accessories	Description
	2 suspension triangles for ECO ATEX
	Fixing clips in stainless steel 316L, 2 units
	Nickel brass Ex cable gland, M20, with nut and ring, 1 unit

