
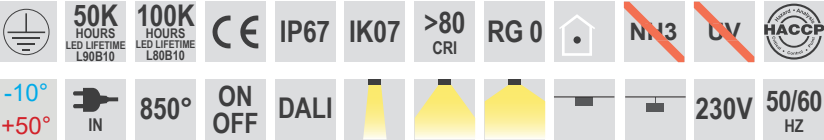


BIG ZINNAKIS GLASS | Waterproof Industrial Light

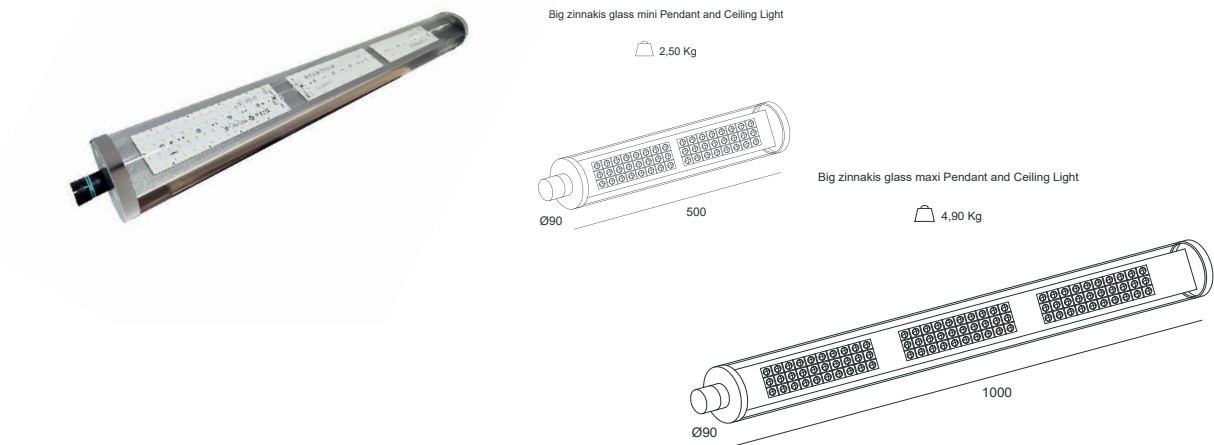

BIG ZINNAKIS GLASS Waterproof Industrial Light									
Light source	Watt LED*	Lumen LED	Lumen OUT**	Energy rating***	L Lenght	Emission	Power Supply	K	Colour
LED	30W	5320	4788		590 mm	CONCENTRATING MEDIUM DIFFUSING	ON-OFF DALI	3000K 4000K 6000K	Grey
LED	60W	10640	9576		1090 mm				

Standby Power: 0 | Mains Standby Power: 0 | Power Supply: 230 Vac 50Hz
*LED Power **Total Luminaire Output Flux @Tamb 25° - 4000°K ***This product contains a light source with Energy Efficiency Class C
Consider an 8% reduction in output flux for 3000°K LED sources, and 10% for CRI>90 LED sources

APPLICATIONS


- Interior lighting fixtures for production areas, industrial environments, commercial spaces, exhibition spaces, chemical plants, distilleries, oil plants, and the pharmaceutical industry.
- Fixtures suitable for use in the food industry (HACCP).
- Certified for use from -10°C to +50°C.
- For specific applications, please contact our technical department.

MECHANICS


- Body made of 3mm thick non-tempered borosilicate glass (specifications in the appendix).
- Internal frame made of heat-dissipating die-bent aluminum.
- Caps made of self-extinguishing V0 polycarbonate, injection-molded, with quick-connect connector.
- LED modules specially designed to ensure maximum performance and efficiency.
- Pendant or ceiling installation with the included brackets.
- All fastenings are made with 2.5-3% molybdenum-rich stainless steel screws.
- IK07 impact protection.
- IP67 protection - dustproof and protected against temporary immersion in water.
- Insulation class I.

ALIMENTATIONS

- Electronic power supply integrated into the fixture body.
- Available in Standard (ON-OFF) or Dimmable (DALI) versions.
- Power supply: 220-240 VAC 50/60 Hz.
- 3/5-pole terminal block.



LED source replaceable only by a qualified technician.



Power supply replaceable only by a qualified technician.

