



BOB

BOB | incasso per piscine e fontane



Lighting fixture for swimming pools, which can be installed using the formwork (supplied as an accessory) made of watertight PVC, complete with cable gland and space for cable richness, for rapid installation in reinforced and prefabricated concrete walls. Frame in AISI 316L steel with polished finish, fixed to the lamp body by means of stainless steel clamping screws. Body in extruded anticorodal aluminum subjected to black paint which acts as a radiant surface and guarantees optimal heat dissipation. The fixture is fixed to the formwork by means of stainless steel screws. Optical compartment closed at the top by a tempered extra-clear glass screen (15mm thick) fixed by means of annealed silicone gaskets and coplanar to the luminaire body to allow easy cleaning.


Source
LED module specially designed to ensure maximum uniformity.

Optics
Roto-symmetrical optic (see table on the side) protected by a tempered extra-clear safety glass screen.

Power supply
Electronic ballast (supplied as an accessory), available in the standard version (on-off). Power supply 220-240Vac 50 / 60Hz.

Note
Outgoing power cable 2x2,50mm², length L = 4000mm, completely non-toxic and suitable for contact with drinking water. IP68 protection both on the product and on the cable using IP68 connectors. Maximum length of the power cable: 19m for the 48W version, 30m for the 27W version and 35m for the 4W version.


Accessories
Electronic ballasts available in the standard version (on-off), for single or multiple installations. Formwork for masonry installation.

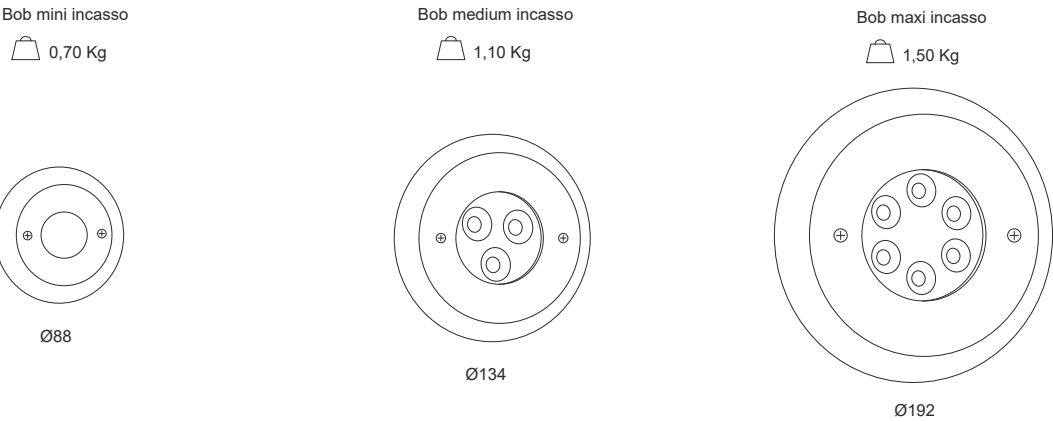

BOB incasso per piscine e fontane								
Sorgente Light source	Watt LED*	Lumen OUT**	K / Colore LED K / LED colour	ØDiametro mm ØDiameter mm	Classe Energetica Energy rating***	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	4W	256	3.000° K 5.000° K	88	G A G	12 V	Spot (17°)	stainless steel
	27W	2510	3.000° K	134	F A G			
		2795	5.000° K		E A G			
	48W	4000	3.000° K 5.000° K	192	F A G			
		2170	RGBW		G A G			
		3500	BLU		G A G			

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @ Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source **E, F, G**
Consider a reduction in output flow dell'8% by source LED 3000°K

Connectors

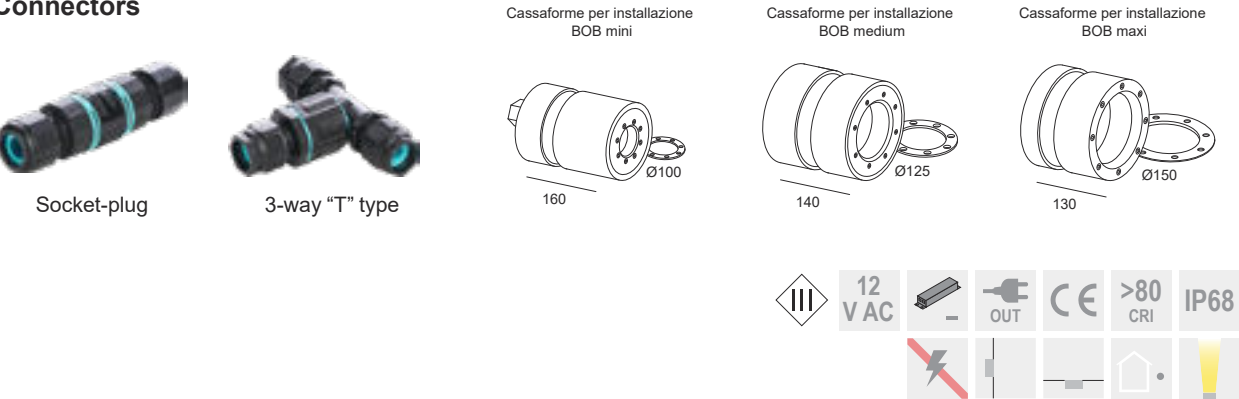

Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician

Alimentatore sostituibile
Power supply replaceable

Richiedere il manuale di sostituzione ai nostri uffici tecnici
For updated technical data or further technical information, consult the website (www.xlitesrl.it)

