




GUNDI

GUNDI | Recessed and Ceiling




Gundi Recessed Opal or UGR

2,30 Kg



Gundi plafone opale o UGR

2,50 Kg



GUNDI Recessed and Ceiling			
Watt*	Lumen**	K	Emission
24W	3500	3000 K 4000 K 5000 K	Wide (119°)
32W	4600		
40W	5700		
47W	6800		
Standby Power: 0 Mains Standby Power: 0 Power Int.: 230 Vac 50Hz *LED Power **Total Luminaire Output Flux @Tamb 25° - 4000°K Consider an 8% reduction in output flux for 3000°K LED sources			

Colour




Charateristics




On request:

GUNDI BACKWARD | Recessed

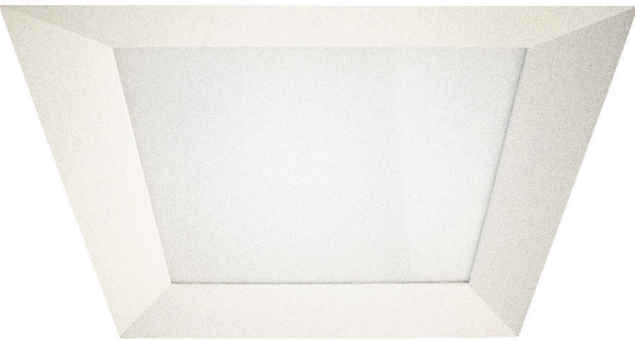

Gundi arretrata incasso

2,40 Kg



GUNDI BACKWARD Recessed			
Watt*	Lumen**	K	Emission
39W	5160	3000 K 4000 K 5000 K	Wide (119°)
Standby Power: 0 Mains Standby Power: 0 Power Int.: 230 Vac 50Hz *LED Power **Total Luminaire Output Flux @Tamb 25° - 4000°K Consider an 8% reduction in output flux for 3000°K LED sources			

Colour



Charateristics



On request:




GUNDI PANEL PLUS

GUNDI PANEL PLUS | Recessed



GUNDI PANEL PLUS UGR

 2,30 Kg



GUNDI PANEL PLUS | Recessed

Watt*	Lumen**	K	Emission
36W	3720	4000 K	Wide (119°)

Standby Power: 0 | Mains Standby Power: 0 | Power Int.: 230 Vac 50Hz
*LED Power **Total Luminaire Output @Tamb 25° - 4000°K

Colour




Charateristics






GUNDI line | Recessed

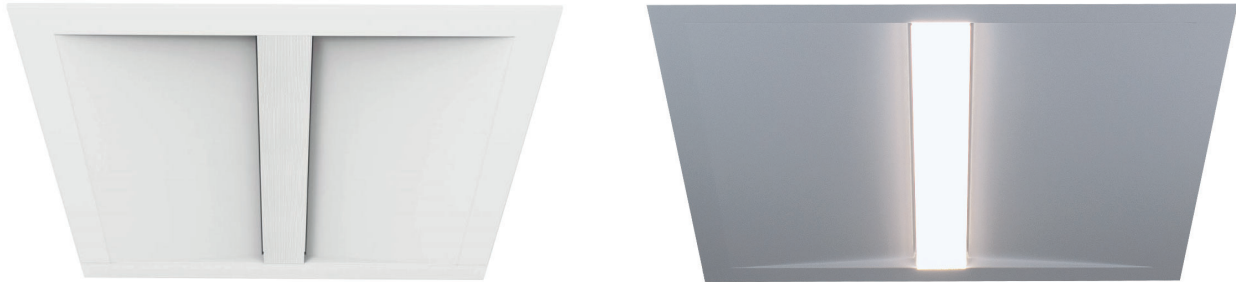

Gundi line recessed UGR

2,70 Kg



GUNDI line Recessed			
Watt*	Lumen**	K	Emission
25,5W	3430	3000 K 4000 K	Wide (119°)

Standby Power: 0 | Mains Standby Power: 0 | Power Int.: 230 Vac 50Hz
*LED Power **Total Luminaire Output Flux @Tamb 25° - 4000°K
Consider an 8% reduction in output flux for 3000°K LED sources

Colour




Charateristics



On request:




GUNDI line double | Recessed

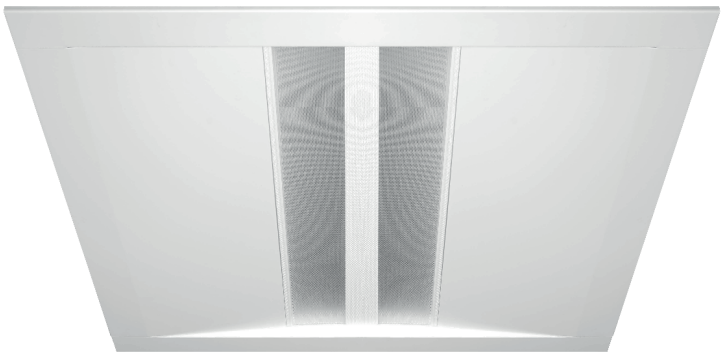

Gundi line double recessed UGR

2,85 Kg



GUNDI line double Recessed			
Watt*	Lumen**	K	Emission
38W	5520	3000 K 4000 K	Wide (119°)
42W	5920		

Standby Power: 0 | Mains Standby Power: 0 | Power Int.: 230 Vac 50Hz
*LED Power **Total Luminaire Output Flux @Tamb 25° - 4000°K
Consider an 8% reduction in output flux for 3000°K LED sources

Colour



Charateristics





On request:





GUNDI LINE PLUS

GUNDI LINE PLUS | Recessed

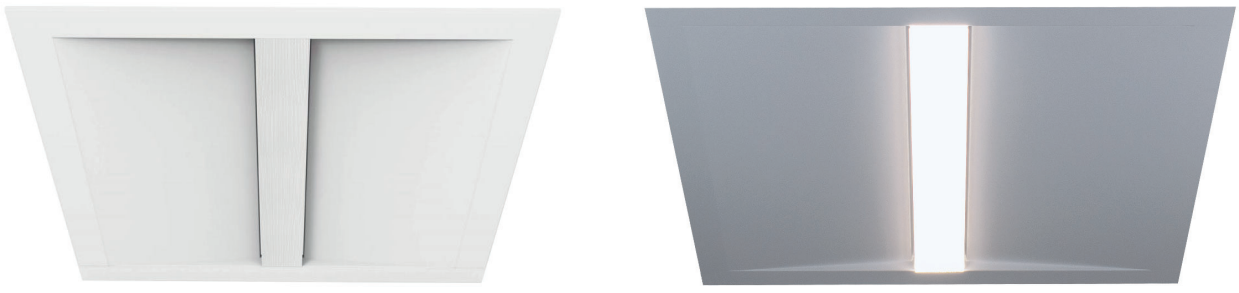

GUNDI LINE PLUS Recessed			
Watt*	Lumen**	K	Emission
39W	5380	4000 K	Wide (119°)

Standby Power: 0 | Mains Standby Power: 0 | Power Int.: 230 Vac 50Hz
*LED Power **Total Luminaire Output @Tamb 25° - 4000°K

Colour

Charateristics

IP44

>90
CRI

IN

19
UGR

IK05

RG 0

PUSH
DIM

EM
EN 60598-2-22


On request:

GUNDI line 295x1195 | Recessed



Gundi line 295x1195 Recessed UGR

 4,10 Kg

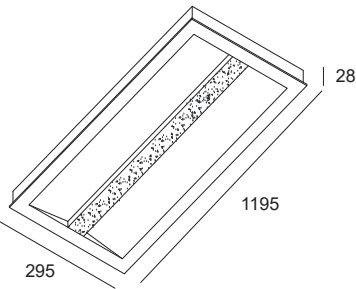

GUNDI line 295x1195 Recessed			
Watt*	Lumen**	K	Emission
26W	3670	3000 K 4000 K	Wide (119°)

Standby Power: 0 | Mains Standby Power: 0 | Power Int.: 230 Vac 50Hz
*LED Power **Total Luminaire Output Flux @Tamb 25° - 4000°K
Consider an 8% reduction in output flux for 3000°K LED sources

Colour




Charateristics




On request :

KEN | incasso

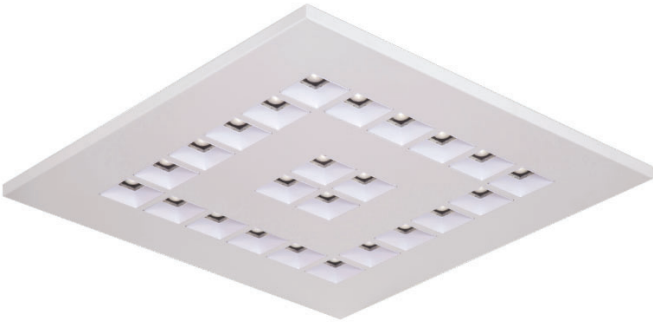

Ken recessed UGR

 1,80 Kg

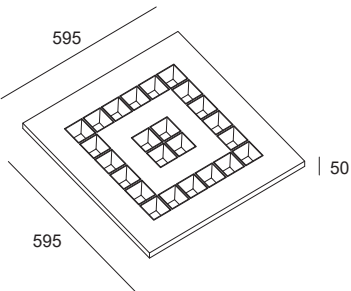

KEN Recessed			
Watt*	Lumen**	K	Emissione
26W	3100	3000 K 4000 K	Flood (80°)

Standby Power: 0 | Mains Standby Power: 0 | Power Int.: 230 Vac 50Hz
*LED Power **Total Luminaire Output Flux @Tamb 25° - 4000°K
Consider an 8% reduction in output flux for 3000°K LED sources

Colour



Charateristics



On request :