



LIFT

ARCHITETTO GUIDO CANALI

LIFT | incasso carrabile antiabbagliamento



LED luminaire for recessed lighting, which can be installed on the floor or ground using the formwork (supplied as an accessory), suitable for illuminating elevations and facades, creating lighting effects of great value, useful for enhancing architecture and green areas. Frame in AISI 316L steel with polished finish, fixed to the lamp body by means of stainless steel clamping screws. Body in extruded anticorodal aluminum subjected to black paint which acts as a radiant surface and guarantees optimal heat dissipation. The device is fixed to the formwork, made of thermoformed plastic, by pressure insertion. Optical compartment closed at the top by a tempered extra-clear glass screen (15mm thick) fixed with annealed silicone gaskets; it is coplanar with the body of the appliance to allow water and dirt to flow out, avoiding the formation of deposits that would significantly reduce the performance of the appliance. Also available in the version with adjustable optics from -40 ° to + 40 °.


Source
LED Chip On Board (COB) technology.

Optics
Roto-symmetrical optics available in various openings (see table opposite) treated by high vacuum metallization and protected by a tempered extra-clear safety glass screen.

Power supply
Electronic power supply (supplied as an accessory), available in the standard (on-off) and dimmable (DALI) version. Power supply 220-240Vac 50 / 60Hz.

Note
Outgoing power cable with length L = 400mm in 2x0.75mm² neoprene. IP68 protection both on the product and on the cable using IP68 connectors. The product is not suitable for installation in swimming pools and fountains. We recommend the use of the SPD protection device, supplied by us upon request.


Accessories
Electronic ballasts available in standard (on-off) and dimmable (DALI) versions, for single or multiple installations. Formwork for masonry installation.

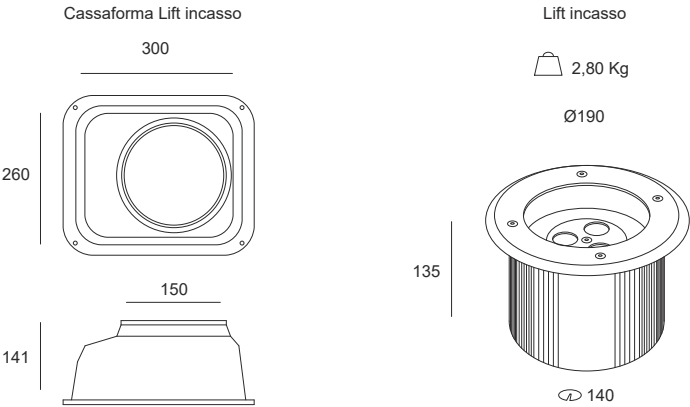

LIFT incasso carrabile antiabbagliamento							
Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
COB LED	22W	2400	E A T G	3.000° K	ON-OFF	Spot (21°) Medium (40°) Wide (65°)	stainless steel


P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @ Tamb 25° - 3000°K ***This product contains an Energy Efficiency Class light source E

Cassaforma LIFT	
Versione Version	Dimensioni Dimension
22W	260x300xH141



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician

Richiedere il manuale di sostituzione ai nostri uffici tecnici




Alimentatore sostituibile
Power supply replaceable

Connectors



Socket-plug 3-way "T" type

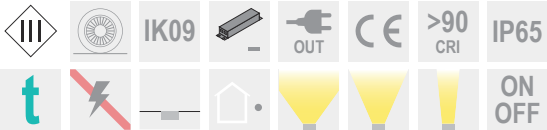

On demand:



For updated technical data or further technical information, consult the website (www.xlitesrl.it)

