



UTAH

UTAH | proiettore da esterno


LED projector for wall, ceiling and floor installation using plugs, suitable for lighting outdoor commercial areas, gardens or pedestrian walkways. The optical compartment, the arm and the base are made of anodized aluminum alloy and subsequently powder coated to provide high resistance to atmospheric agents and UV rays. The special joint guarantees complete freedom in directing the light beam, the aiming is blocked by tightening the stainless steel stops. Tempered extra-clear front glass (5mm thick) fixed by resin, to avoid the formation of deposits that would significantly reduce the performance of the appliance. Stainless steel screws with a high molybdenum content. Annealed silicone sealing gaskets.

Source
LED Chip On Board (COB) technology.

Optics
Roto-symmetrical optic (see table opposite) treated by high vacuum metallization and protected by a tempered extra-clear safety glass screen fixed by resin.

Power supply
Electronic power supply integrated in the body of the fixture, available in the standard version (on-off). Power supply 220-240Vac 50 / 60Hz.


Note
IP65 protection on both the product and the cable using IP65 connectors. Spike version also available (see catalogue). We recommend the use of the SPD protection device, supplied by us upon request.

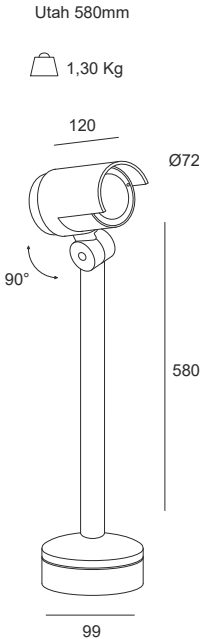


UTAH proiettore da esterno							
Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
COB LED	10W	745	D A ↑ G	3.000° K	ON-OFF	Flood (45°)	anthracite

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @ Tamb 25° - 3000°K ***This product contains an Energy Efficiency Class light source D


Connectors

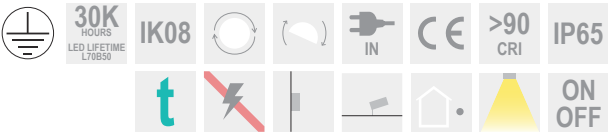

On demand:



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician



Alimentatore non sostituibile
Non-replaceable power supply

Request the replacement manual from our technical offices



UTAH picchetto | proiettore da esterno


LED projector for ground installation with spike (supplied), suitable for lighting outdoor commercial areas, gardens or pedestrian walkways. The optical compartment and the arm are made of anodized aluminum alloy and subsequently powder coated to provide high resistance to atmospheric agents and UV rays. The special joint guarantees complete freedom in directing the light beam, the aiming is blocked by tightening the stainless steel stops. Tempered extra-clear front glass (5mm thick) fixed by resin, to avoid the formation of deposits that would significantly reduce the performance of the appliance. Stainless steel screws with a high molybdenum content. Annealed silicone sealing gaskets.

Source
LED Chip On Board (COB) technology.

Optics
Roto-symmetrical optic (see table opposite) treated by high vacuum metallization and protected by a tempered extra-clear safety glass screen fixed by resin.

Power supply
Electronic power supply integrated in the body of the fixture, available in the standard version (on-off). Power supply 220-240Vac 50 / 60Hz.

Note
IP65 protection on both the product and the cable using IP65 connectors. Also available the version for wall installation (see catalogue). We recommend the use of the SPD protection device, supplied by us upon request.

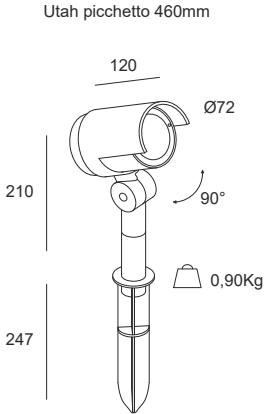

UTAH picchetto proiettore da esterno							
Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
COB LED	10W	745	D A ↑ G	3.000° K	ON-OFF	Flood (45°)	anthracite

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @Tamb 25° - 3000°K ***This product contains an Energy Efficiency Class light source D

Picket



Connectors




Socket-plug




3-way "T" type



On demand:



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician



Alimentatore sostituibile
Power supply replaceable

Request the replacement manual from our technical offices

