



SPIKE

SPIKE | incasso




Adjustable recessed LED luminaire, suitable for lighting residential and commercial outdoor environments, always guaranteeing perfect illumination while maintaining high visual comfort. Body and passive dissipation system made of anodized aluminum alloy and subsequently powder coated to provide high resistance to atmospheric agents and UV rays. Body adjustability from -10 ° to + 10 ° on the vertical plane, the aiming is blocked by friction. Ceiling fixing system using special stainless steel screws complete with aluminum alloy hooking supports. It can be installed on CGS false ceilings with a thickness of 12 ÷ 30mm. Preparation hole in the false ceiling $\varnothing = 100\text{mm}$.

Source
LED Chip On Board (COB) technology.

Optics
Roto-symmetrical optic (see table opposite) treated by high vacuum metallization and protected by a tempered glass screen.

Power supply
Electronic power supply supplied connected to the device, available in the standard version (on-off). Power supply 220-240Vac 50 / 60Hz.


Note
We recommend the use of the SPD protection device, supplied by us upon request.

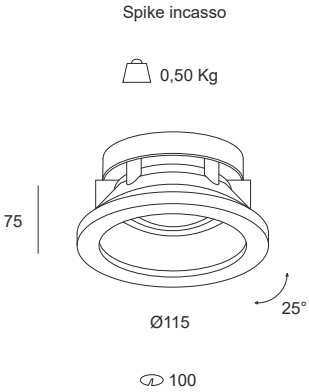


SPIKE incasso							
Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	10W	809	E A ↑ G	3.000° K	ON-OFF	Flood (45°)	white

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @ Tamb 25° - 3000°K ***This product contains an Energy Efficiency Class light source E


Connectors

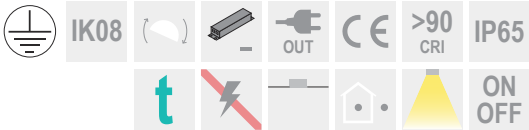

On demand:



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician



Alimentatore sostituibile
Power supply replaceable

Request the replacement manual from our technical offices

