



PREP

PREP | incasso oerientabile




LED luminaire for simple or flush recessed installation depending on the formwork to which it is associated. Perfect for accent lighting or targeted aiming in domestic exhibition environments, giving the ceiling a sober and minimalist look. The rear position of the light source and the possibility of its orientation minimizes glare and allows for high lighting comfort. Main body in die-cast aluminum, anodized, includes a radiant surface that guarantees optimal heat dissipation.

Source
LED Chip On Board (COB) technology 7W @ 180mA, 12W @ 300mA.

Optics
Roto-symmetrical optics (see table opposite) in opal methacrylate (PMMA) designed to reduce glare.

Power Supply
Electronic power supply supplied connected to the device, available in the standard version (on-off). Power supply 220-240Vac 50 / 60Hz.

Note
For its correct installation, the product requires a formwork (supplied separately), which can be round or square, recessed with ledge or flush, white or black.



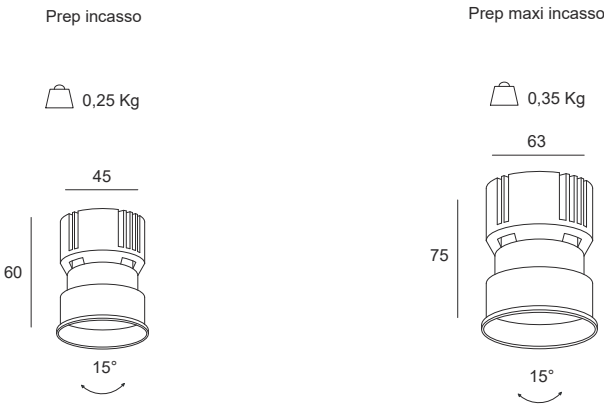


PREP incasso orientabile								
Sorgente Light source	Watt LED*	Lumen OUT**	ØDiametro mm ØDiameter mm	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	7W	800	50	G A G	3.000° K	ON-OFF	Flood (45°)	white
LED	12W	1400	70					black


P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 180mA, 300mA
*LED power **Total flow exiting the appliance @ Tamb 25° - 3000°K ***This product contains an Energy Efficiency Class light source **G**
Consider a reduction in output flow dell'8% by source LED 3000°K, e del 10% by source LED CRI>90

Cassaforme per installazione a rasamento
PREP

Cassaforme per installazione a rasamento
PREP MAXI

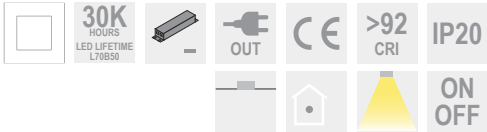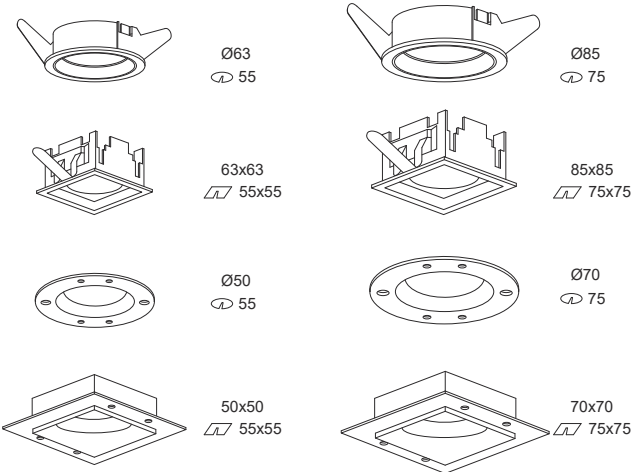

Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician



Alimentatore sostituibile
Power supply replaceable

Request the replacement manual from our technical offices





