




SLIM

SLIM | applique

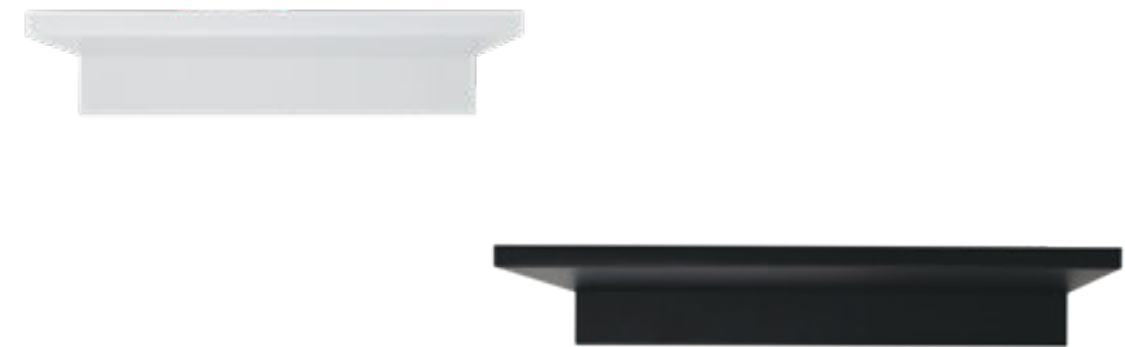

LED luminaire with indirect light emission for wall installation. Rectangular body, made of aluminum profile and powder coated. Applique particularly suitable for lighting private residences, commercial activities or exhibition areas. The extremely minimal design makes the device light and extremely versatile for various uses. The DOB (driver on board) LED electronics allows the device not to need a power supply.


Source
DOB LED module specially designed to ensure maximum uniformity.

Optics
Roto-symmetrical emission (see table opposite) protected by a microprismatic glass screen designed to reduce glare.

Power Supply
No electronic ballast, available in the standard version (on-off). Power supply 220-240Vac 50 / 60Hz.


Slim applique

0,80 Kg




Slim maxi applique

1,20 Kg

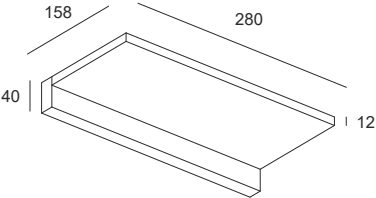

SLIM applique								
Sorgente Light source	Watt LED*	Lumen OUT**	L Lunghezza L Lenght	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	18W	2070	200 mm		3.000° K	ON-OFF	Wide flood (119°)	white
LED	24W	2750	280 mm					black

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @ Tamb 25° - 3000°K ***This product contains an Energy Efficiency Class light source E



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician

Request the replacement manual from our technical offices

