

PLUTO | incasso




LED luminaire for recessed installation, using a spring system. Suitable for illuminating commercial and exhibition environments, where it is of fundamental importance to obtain high-performance lighting while preserving user comfort, the set back light source minimizes glare and allows for high visual comfort. Main body in die-cast aluminum, powder-coated, includes a radiant surface that guarantees optimal heat dissipation.


Source
LED Chip On Board (COB) technology.

Optics
Roto-symmetrical high-definition optics (see table opposite) in metallized polycarbonate, protected by an extra-clear screen-printed glass screen.


Power supply
Electronic power supply supplied connected to the device, available in the standard version (on-off). Power supply 220-240Vac 50 / 60Hz.

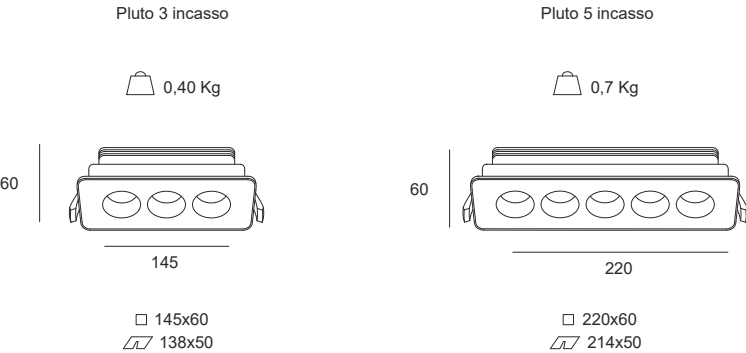

PLUTO incasso								
Sorgente Light source	Watt LED*	Lumen OUT**	L Lunghezza L Lenght	Classe Energetica Energy rating***	Emissione Emission	Alimentazione Power supply	K	Colore Colour
LED	7W	500	145 mm	G A G	Medium (38°)	ON-OFF	3.000° K 4.000° K	white
LED	12W	850	220 mm					black
P. Stand-by: 0 P. Stand-by in rete: 0 Int. Elettrica: 230 Vac 50Hz *LED power **Total flow exiting the appliance a temperatura di lavoro (Ta 25° - 4000°K) (3000°K - 8% - CRI90 - 10%) ***This product contains an Energy Efficiency Class light source G								




Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician



Alimentatore sostituibile
Power supply replaceable

Request the replacement manual from our technical offices

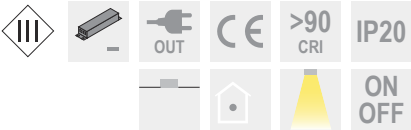

For updated technical data or further technical information, consult the website (www.xlitesrl.it)