




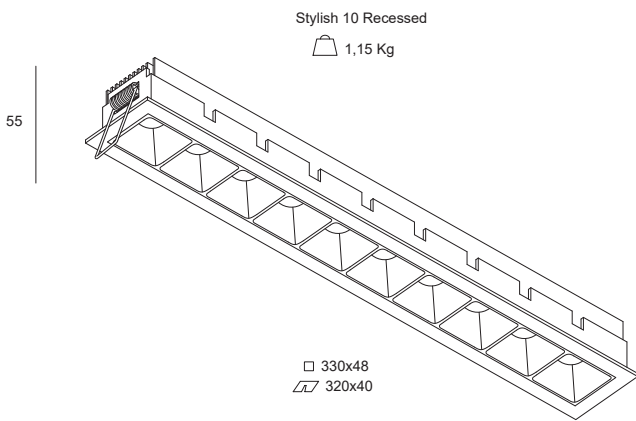

STYLISH

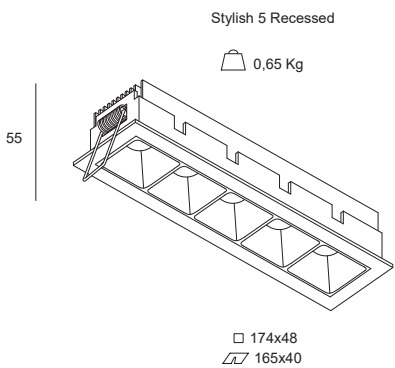

STYLISH | Recessed

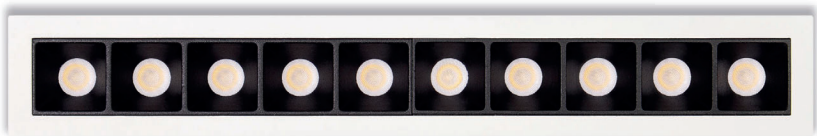

STYLISH Recessed				
Watt*	Lumen**	L Lenght	K	Emission
10W	1262	174 mm	3000 K 4000 K	Medium (31°) Flood (60°)
20W	2500	330 mm		

Standby Power: 0 | Mains Standby Power: 0 | Power Int.: 230 Vac 50Hz
*LED Power **Total Luminaire Output Flux @Tamb 25° - 4000°K
Consider an 8% reduction in output flux for 3000°K LED sources

Colours



Charateristics






STYLISH HO

STYLISH HO | Recessed




Stylish 1 HO Recessed
0,35 Kg

Stylish 3 HO Recessed
0,95 Kg



83x83
73x73

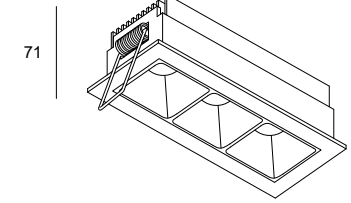

175x83
165x73

STYLISH HO Recessed				
Watt*	Lumen**	L Lenght	K	Emission
7W	790	83 mm	3000 K 4000 K	Flood (60°)
18W	2240	175 mm		

Standby Power: 0 | Mains Standby Power: 0 | Power Int.: 230 Vac 50Hz
*LED Power **Total Luminaire Output Flux @Tamb 25° - 4000°K
Consider an 8% reduction in output flux for 3000°K LED sources

Colours



Charateristics




On request:





STYLISH | Pendant

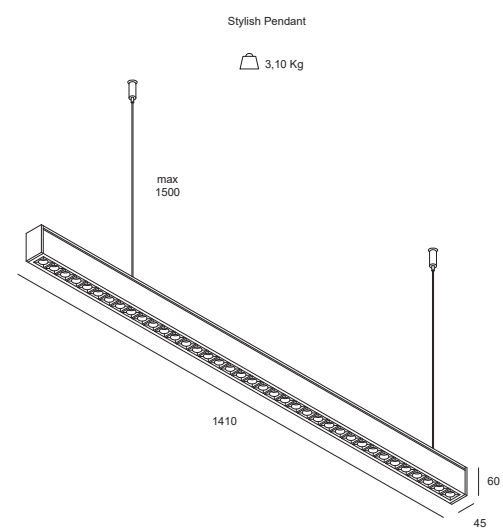

STYLISH Pendant				
Watt*	Lumen**	L Lenght	K	Emission
40W	4200	1410 mm	3000 K 4000 K	Double emission

Standby Power: 0 | Mains Standby Power: 0 | Power Int.: 230 Vac 50Hz
*LED Power **Total Luminaire Output Flux @Tamb 25° - 4000°K
Consider an 8% reduction in output flux for 3000°K LED sources

Colour



Charateristics

