

GUNDI TUNABLE WHITE | incasso, plafone



LED luminaire for recessed installation, by means of a support or ceiling. Suitable for lighting showrooms, control departments and commercial activities. Thanks to the special anti-glare microprismatic diffuser in transparent or opal methacrylate, the device is suitable for installation in workplaces with the presence of operators for long periods and where VDUs are used. Main body at low surface temperature D (EN 60598 2 24) in press-formed steel sheet, powder-coated, suitable for installation in modular ceilings with 600x600mm panels. Dimming and control of the Kelvin gradation can be done by means of the CASAMBI Xpress control head or by means of the CASAMBI mobile app.


Source
Tunable white LED module (from 2700 ° K to 5000 ° K) specially designed to ensure maximum uniformity.

Optics
Roto-symmetrical emission (see table opposite) protected by a microprismatic or opal, anti-glare methacrylate screen designed to reduce glare. The device is suitable for installation in UGR <19 (EN12464-1) work environments.

Power supply
Electronic power supply integrated into the body of the fixture, available in the CASAMBI (BLE) version. Power supply 220-240Vac 50 / 60Hz.


Note
Appliance compliant with EN 60598 2 22 for power supply from a rescuer system.

Accessories
CASAMBI control keyboard.




Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician

Richiedere il manuale di sostituzione ai nostri uffici tecnici




Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician

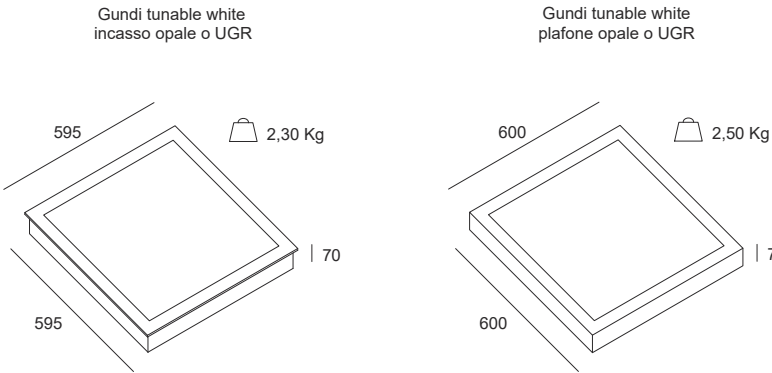

GUNDI TUNABLE WHITE incasso, plafone							
Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating****	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	24W	3500		TW***	CASAMBI	Wide flood (119°)	bianco
LED	32W	4600					
LED	40W	5700					
LED	47W	6800					

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*Potenza dei LED **Flusso totale in uscita dall'apparecchio @Tamb 25° - 4000°K ***Tunable White 2.700°K - 5.000°K ***Questo prodotto contiene una sorgente luminosa di Classe di efficienza Energetica **E**
Considerare una riduzione del flusso in uscita dell'8% per sorgente LED 3000°K, e del 10% per sorgente LED CRI>90

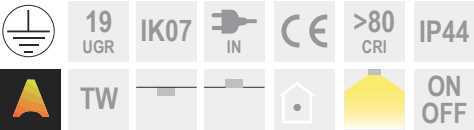

A richiesta:

IP55

