

VIA CRUCIS | applique




LED luminaire with direct light emission for wall installation. Designed for use in churches or religious environments where it is necessary to illuminate niches, relics or stations of the Via Crucis. Body made from solid aluminum and powder coated, diffusion tube in borosilicate glass (Pyrex®) sandblasted inside. Available in the version with internal or remote power supply. The extremely minimal design makes the device light and elegant. The size and reduced power (2W) allow perfect illumination of the desired object without disturbing the user.

Source
LED Chip On Board (COB) technology.


Optics
Rotationally symmetrical emission (see table opposite) protected by an internally sandblasted borosilicate glass (Pyrex®) diffusion tube.

Power Supply
Electronic ballast integrated in the body of the device or remotely (depending on the model), available in standard versions (on-off). Power supply 220-240Vac 50 / 60Hz.

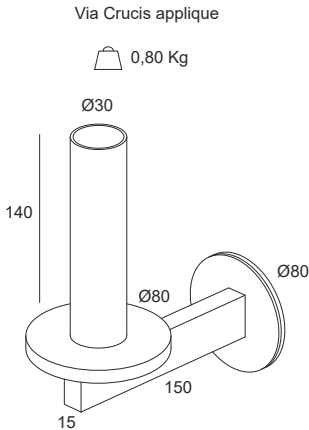


VIA CRUCIS applique							
Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	2W	250		3.000° K 4.000° K	ON-OFF	Ultra wide (120°)	bianco nero corten

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*Potenza dei LED **Flusso totale in uscita dall'apparecchio @Tamb 25° - 4000°K ***Questo prodotto contiene una sorgente luminosa di Classe di efficienza Energetica E Considerare una riduzione del flusso in uscita dell'8% per sorgente LED 3000°K, e del 10% per sorgente LED CRI>90



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician



Alimentatore sostituibile
Power supply replaceable

Richiedere il manuale di sostituzione ai nostri uffici tecnici



Per i dati tecnici aggiornati o per ulteriori informazioni tecniche consultare il sito web (www.xlitesrl.it)