


A modern conference room with a long wooden table, light blue chairs, and a large mirror. The room features a high ceiling with ornate moldings and a large mirror on the wall. The floor is made of light-colored wood. The chairs are light blue with silver bases. The table is long and rectangular, made of light-colored wood. The room is well-lit with modern lighting fixtures.

JOB

JOB | plafone

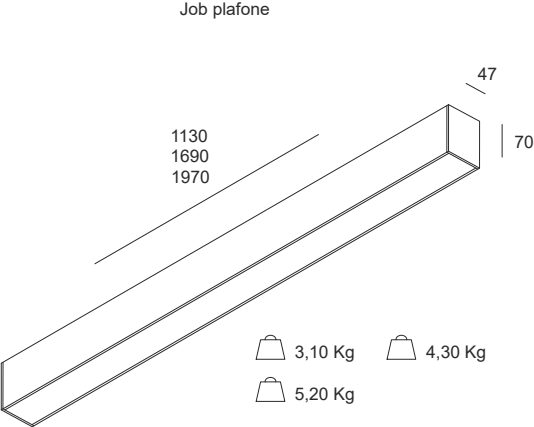

Linear LED luminaire for ceiling-mounted installations, body in powder-coated aluminum section, equipped with closing caps and suitable holes for fixing and passing power cables. Suitable for lighting public and private environments. The small size makes this luminaire light and extremely versatile for various uses. Thanks to the special anti-glare diffuser in opal methacrylate, the device is suitable for installation in workplaces with the presence of operators for long periods and where VDUs are used.


Source
LED module specially designed to ensure maximum uniformity and the total absence of point light.

Optics
Roto-symmetrical emission (see table opposite) protected by an opal methacrylate screen designed to reduce glare. The device is suitable for installation in UGR <19 (EN12464-1) work environments.

Power supply
Electronic power supply integrated in the body of the fixture, available in standard (on-off) and dimmable (DALI) versions. Power supply 220-240Vac 50 / 60Hz.


Note
Also available in the version for suspended installation.

JOB plafone								
Sorgente Light source	Watt LED*	Lumen OUT**	L Lunghezza L Lenght	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	24W	3544	1130 mm		3.000° K 4.000° K	ON-OFF	Wide flood (110°)	white
LED	36W	5516	1690 mm			On demand DALI		grey
LED	42W	6630	1970 mm					black corten
P. Stand-by: 0 P. Stand-by in rete: 0 Int. Elettrica: 230 Vac 50Hz *LED power **Total flow exiting the appliance @ Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source D Consider a reduction in output flow dell'8% by source LED 3000°K								



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician

Request the replacement manual from our technical offices



Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician



On demand:



For updated technical data or further technical information, consult the website (www.xlitesrl.it)



JOB | sospensione




Linear bi-emission LED luminaire for suspended installations, body in powder-coated aluminum section, equipped with closing caps and suspension kit complete with cables L.1500mm. Suitable for lighting public and private environments. The small size makes this luminaire light and extremely versatile for various uses. Thanks to the special anti-glare diffuser in opal methacrylate, the device is suitable for installation in workplaces with the presence of operators for long periods and where VDUs are used.

Source
LED module specially designed to ensure maximum uniformity and the total absence of point light.

Optics
Rotationally symmetrical bi-emission (see table alongside) protected by an opal methacrylate screen designed to reduce glare. The device is suitable for installation in UGR <19 (EN12464-1) work environments.


Power supply
Electronic power supply integrated in the body of the fixture, available in standard (on-off) and dimmable (DALI) versions. Power supply 220-240Vac 50 / 60Hz.

Note
The version for ceiling installation is also available.

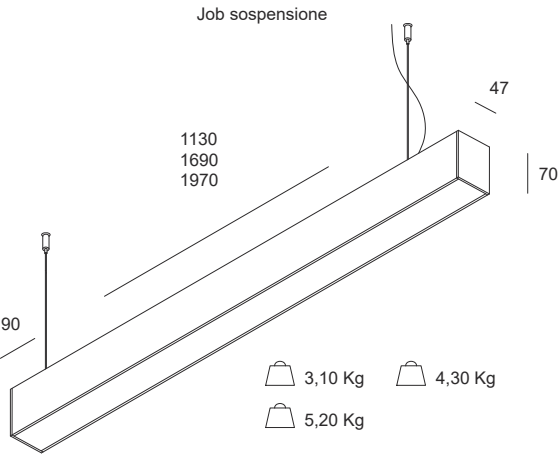


JOB sospensione								
Sorgente Light source	Watt LED*	Lumen OUT**	L Lunghezza L Lenght	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	24+18W	6630	1130 mm		3.000° K 4.000° K	ON-OFF On demand DALI	Doppia emissione	white
LED	36+30W	9810	1690 mm					grey
LED	42+36W	11030	1970 mm					black
								corten

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source D, E
Consider a reduction in output flow dell'8% by source LED 3000°K



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician

Request the replacement manual from our technical offices



Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician



On demand:



