



MAINO

MAINO | incasso orientabile




Semi-recessed LED fixture, adjustable and removable, easy to install with a spring system, perfect for accent lighting in residential and commercial environments. Flush version with 40mm diameter and 70mm extractable length. Body in aluminum profile, powder coated, with a diameter of 60mm and an extractable length of 90mm. Passive dissipation system by means of die-cast aluminium. Adjustability of the body from 0° to 90° on the vertical plane and 350° on the horizontal plane, aiming is blocked by means of a friction.

Source
LED Chip On Board (COB) technology. 8W@700mA . 9W @ 350mA.


Optics
Roto-symmetrical optic treated by high vacuum metallization and protected by a polycarbonate screen with a satin “frost” effect designed to reduce glare.

Power supply
Electronic power supply supplied connected to the fixture, available in the standard (on-off) and dimmable (DALI) version. Power supply 220-240Vac 50 / 60Hz.

Maino incasso round orientabile rasamento

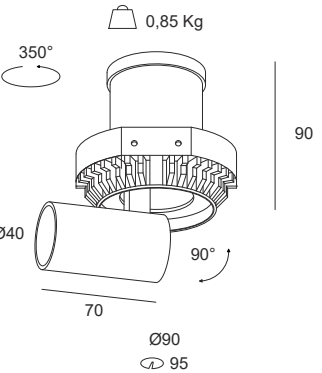


Maino incasso round orientabile

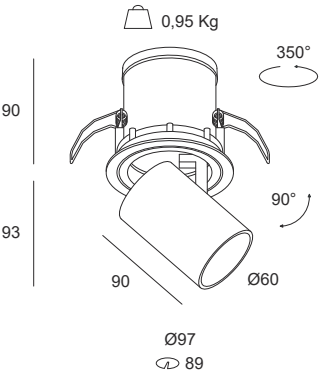


MAINO incasso orientabile								
Sorgente Light source	Watt LED*	Lumen OUT**	ØDiametro mm ØDiameter mm	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
COB LED	8W	362	40	G A 1 G	3.000° K 4.000° K	ON-OFF	Medium (34°)	white grey black
COB LED	9W	1200	60			On demand DALI		

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 350mA, 700mA
*LED power **Total flow exiting the appliance @ Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source F, G
Consider a reduction in output flow dell'8% by source LED 3000°K, e del 10% by source LED CRI>90




Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician



Alimentatore sostituibile
Power supply replaceable

Request the replacement manual from our technical offices

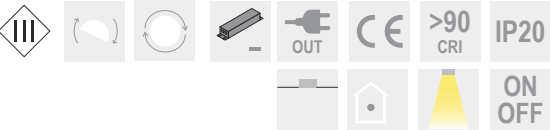

On demand:



For updated technical data or further technical information, consult the website (www.xlitesrl.it)

