




PLAN

PLAN | plafone

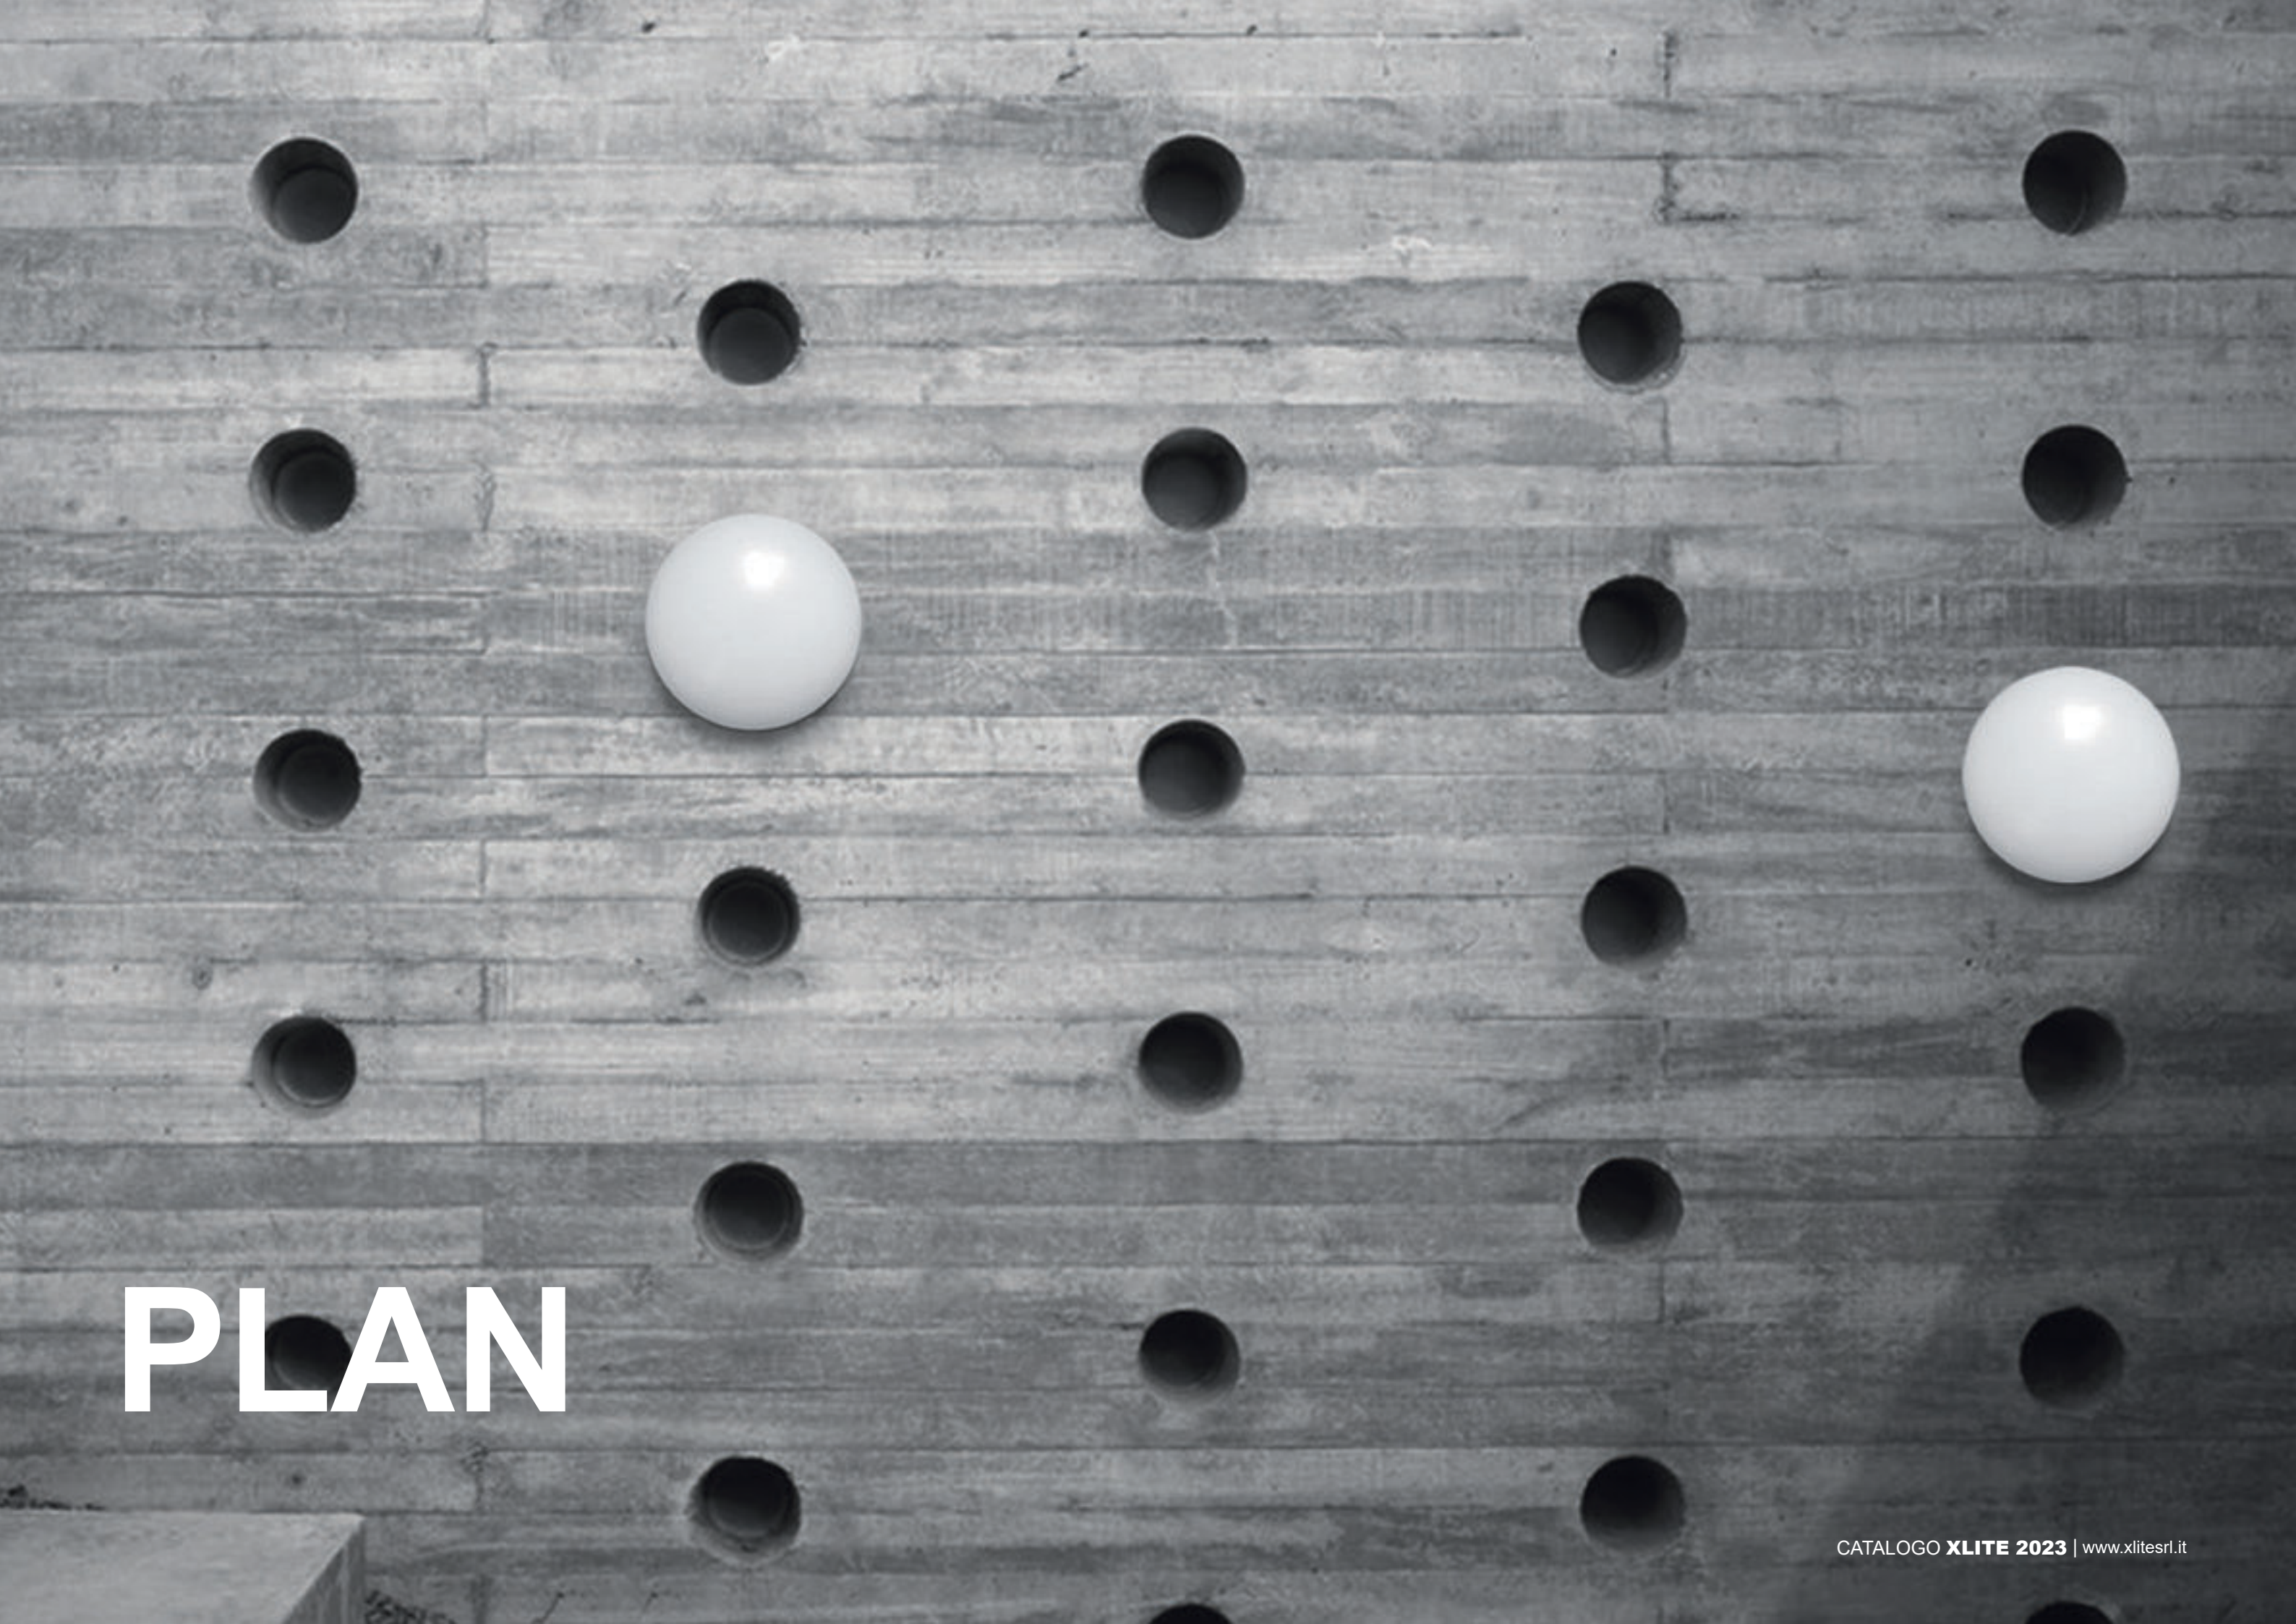


LED luminaire for ceiling installation particularly suitable for technical compartments, car parks, public areas and service areas. Body in thermoformed polycarbonate, with a diameter of 300mm for the round version and 300x300mm for the square version. Diffusing screen in thermoformed opal methacrylate with high mechanical resistance. Passive dissipation system through internal aluminum die casting.

Source
LED Chip On Board (COB) technology.


Optic
Roto-symmetrical optics (see table alongside) protected by an opal methacrylate (PMMA) screen designed to reduce glare.

Power Supply
Electronic power supply integrated into the body of the fixture, available in the standard version (on-off). Power supply 220-240Vac 50 / 60Hz.

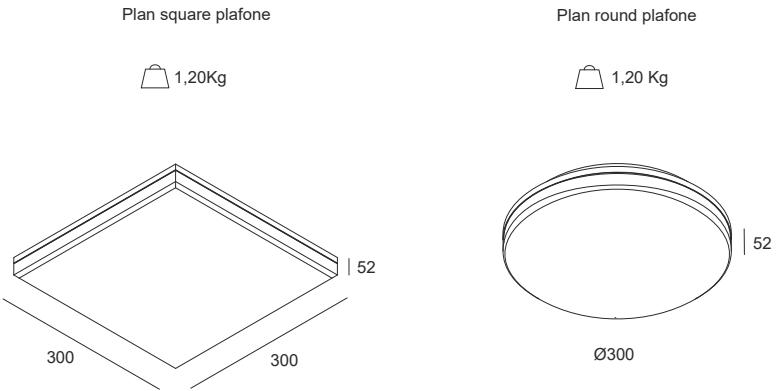


PLAN plafone							
Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	24W	2300	F A++ G	3.000° K 4.000° K	ON-OFF	Wide (70°)	white

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source F
Consider a reduction in output flow dell'8% by source LED 3000°K



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician

Request the replacement manual from our technical offices



Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician

