


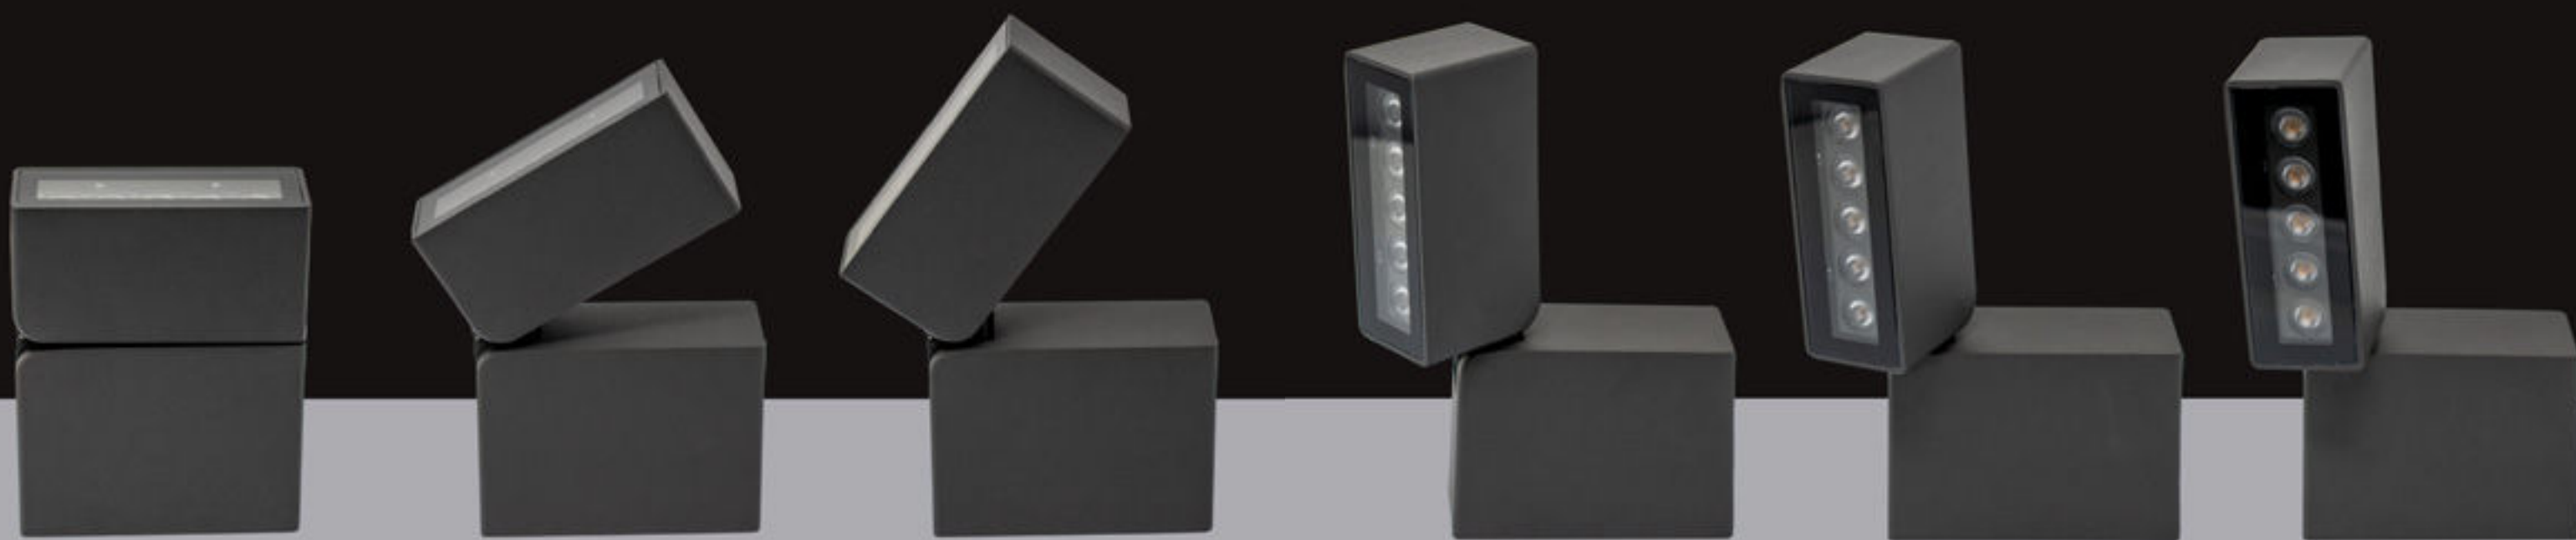


TATO

Source
LED Chip On Board (COB) technology.

Roto-symmetrical optics available in various openings (see table opposite) treated by high vacuum metallization and protected by a tempered extra-clear safety glass screen fixed by resin.

Electronic power supply integrated into the body of the fixture, available in standard versions (on-off). Power supply 220-240Vac 50 / 60Hz.


We recommend the use of the SPD protection device, supplied by us upon request.



Alimentatore non sostituibile
Non-replaceable power supply

CATALOGO **XLITE 2023** | www.xlitesrl.it

For updated technical data or further technical information, consult the website (www.xlitesrl.it)

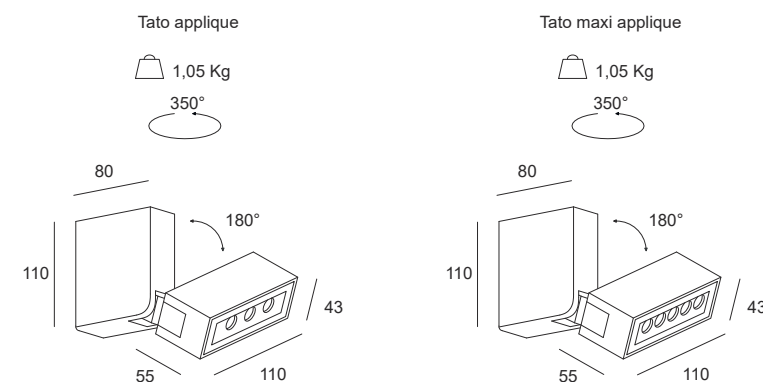

TATO proiettore							
Sorgente <i>Light source</i>	Watt LED*	Lumen OUT**	Classe Energetica <i>Energy rating***</i>	K	Alimentazione <i>Power supply</i>	Emissione <i>Emission</i>	Colore <i>Colour</i>
COB LED	6W	642		3.000° K	ON-OFF	Spot (15°) Medium (34°) Flood (48°) Wide (60°)	 anthracite
	10,5W	1070					

*LED power **Total flow exiting the appliance @Tamb 25° - 3000°K ***This product contains an Energy Efficiency Class light source **F**

Connectors IP



On demand:

