

PIPPO | proiettore da binario



LED projector for track installation. Body in aluminum profile, powder coated, with diameter 60mm and power 9W. Passive dissipation system through internal die-cast aluminum frame. Body adjustability from 0 ° to 90 ° on the vertical plane and 350 ° on the horizontal one, the aiming is blocked by friction. Variable optics (10 ° - 48 °) by means of an adjustment ring.

Source
LED Chip On Board (COB) technology.


Optics
Variable roto-symmetrical optic through adjustment ring (see table opposite) treated by high vacuum metallization and protected by a polycarbonate screen with satin “frost” effect designed to reduce glare.

Power supply
Electronic power supply integrated in the body of the fixture, available in standard (on-off) and dimmable (DALI) versions. Power supply via track 220-240Vac 50 / 60Hz.

Note
Track mount matching the projector body (white for the product with white finish and black for all the other colors).


Accessories
Electrified tracks (see appendix).

Pippo proiettore da binario

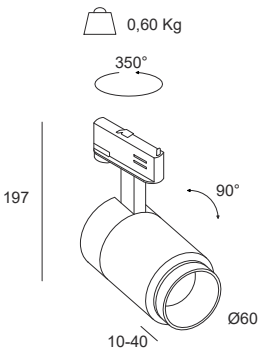


PIPPO proiettore da binario								
Sorgente Light source	Watt LED*	Lumen OUT**	ØDiametro mm ØDiameter mm	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
COB LED	9W	1134	60	E A 6	3.000° K 4.000° K	ON-OFF On demand DALI	Regolabile (10°- 48°)	white grey black anthracite

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @ Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source E
Consider a reduction in output flow dell'8% by source LED 3000°K, e del 10% by source LED CRI>90



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician



Alimentatore non sostituibile
Non-replaceable power supply

Request the replacement manual from our technical offices



On demand:



For updated technical data or further technical information, consult the website (www.xlitesrl.it)