




VIGO

VIGO | applique

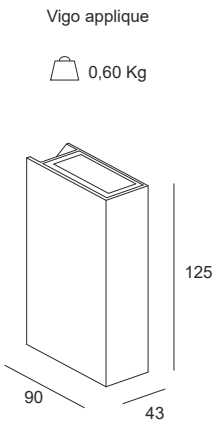

Double emission LED fixture (uplight + downlight) for wall installation, suitable for enhancing elevations and cladding materials, the minimal design allows integration with any type of architecture. Body made of anodized aluminum alloy and subsequently powder coated to provide high resistance to atmospheric agents and UV rays. Diffusers in transparent tempered glass fixed by resin in a coplanar position to the body of the appliance to allow water and dirt to flow away, avoiding the formation of deposits which would significantly reduce the performance of the appliance. Wall fixing system using an aluminum alloy plate treated and painted in the same way as the lamp body. Can be installed on any flat surface by dowelling. Screws in stainless steel with a high molybdenum content. Sealing gaskets in annealed silicone.

Source
LED modules specially designed to ensure maximum uniformity and the total absence of point light.

Optics
Double roto-symmetrical emission (see table alongside), protected by satin-finish tempered glass screens.

Power supply
Electronic ballast integrated in the body of the fixture, available in the standard version (on-off). Power supply 220-240Vac 50/60Hz.

Note
We recommend the use of the SPD protection device, supplied by us upon request.

VIGO applique							
Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
COB LED	8W	346		3.000° K	ON-OFF	Doppia emissione	white grey anthracite

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @ Tamb 25° - 3000°K ***This product contains an Energy Efficiency Class light source D

Connectors




Connectors IP



On demand:

SPD

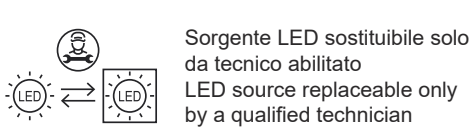

Request the replacement manual from our technical offices

