
ECO BRIVIDO | Waterproof Industrial Light



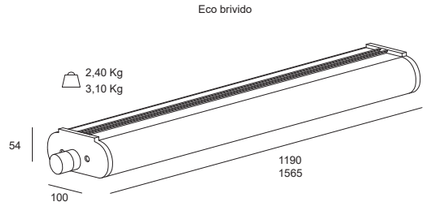

ECO BRIVIDO | Waterproof Industrial light for temperatures from -40°C to +40°C

Relamping	Watt LED*	Lumen LED	Lumen OUT**	*Energy rating****	L *Lenght*	*Power supply*	K	*Colour*
1x36	16W	3240	2916	C	1190 mm	ON-OFF DALI PUSH-DIM	3000K 4000K 6000K	Grey
1x54	20W	3411	3070	C				
2X36	32W	6480	5832	C				
2X54	40W	6822	6140	C				
1x58	20W	4347	3912	C	1565 mm			
1x80	28W	4568	4111	C				
2x58	40W	8694	7824	C				
2x80	56W	9136	8222	C				

Standby Power: 0 | Mains Standby Power: 0 | Power Supply: 230 Vac 50Hz
*LED Power **Maximum LED Lumens at 25°C ***This product contains a light source with Energy Efficiency Class C
All data refers to an ambient temperature of +25°C. For data at different temperatures, please contact our technical office.

50K HOURS LED LIFETIME L90B10 | 100K HOURS LED LIFETIME L80B10 | CE | IP65 | IK09 | >80 CRI | RG 0 | UV | HACCP
-25° +40° | IN | 850° | ON OFF | DALI | PUSH DIM | 230V | 50/60 HZ

On request: >90 CRI



APPLICATIONS

- Lighting fixture designed for use in cold rooms, refrigerated warehouses, blast chillers, and refrigerated cellars.
- Suitable for warehouses, sheds, and industrial facilities with negative temperatures.
- Fixtures suitable for use in the food industry (HACCP).
- Certified for use from -25° to +40°C.
- For specific applications, please contact our technical department.

MECHANICS

- Satin-finish polycarbonate lamp body.
- Single-piece body with high luminous efficiency, V2 self-extinguishing, and UV-stabilized.
- LED modules specially designed to ensure maximum performance and efficiency.
- Aluminum reflector, anodized and polished to ensure high luminous efficiency and excellent heat dissipation for maximum LED life and efficiency.
- Diffused light emission.
- All fastenings are made with stainless steel screws with a high molybdenum content (2.5-3%).
- Annealed silicone gaskets.
- Complete with male/female quick-release connector.
- IK09 impact protection.
- IP65 protection - dustproof and protected from water jets.
- Insulation class I.

ALIMENTATIONS

- Electronic power supply integrated into the fixture body.
- Available in standard (ON-OFF), dimmable (DALI), and (PUSH-DIM) versions.
- Power supply: 220-240 VAC 50/60 Hz.
- 3/5-pole terminal block.

LED source replaceable only by a qualified technician.

Power supply replaceable only by a qualified technician.