

GLORY

ARCHITETTO FRANCESCO BOCCHI

GLORY | applique




LED fixture with direct / indirect light emission for wall installation. Rectangular-shaped body protected by a screen in press-bent aluminum sheet to recall the lines of the Varese model concrete beams, made of powder-coated aluminum. Standard sizes 300mm and 500mm. Wall lamp particularly suitable for lighting halls, private residences, multi-purpose environments or offices. The extremely minimal design makes the device light and extremely versatile for various uses.

Source
LED module specially designed to ensure maximum uniformity.


Optics
Rotosymmetric emission (see table alongside) protected by an opal methacrylate anti-glare screen designed to reduce glare.

Power Supply
Electronic ballast integrated in the body of the fixture, available in the standard (on-off) and dimmable (DALI) versions. Power supply 220-240Vac 50/60Hz.


Glory applique
1,25 Kg



Glory maxi applique
2,40 Kg




GLORY applique								
Sorgente <i>Light source</i>	Watt LED*	Lumen OUT**	L Lunghezza <i>L Lenght</i>	Classe Energetica <i>Energy rating***</i>	K	Alimentazione <i>Power supply</i>	Emissione <i>Emission</i>	Colore <i>Colour</i>
LED	16W	1650	300 mm		3.000° K 4.000° K	ON-OFF	Doppia emissione	white
LED	32W	3024	500 mm			grey black corten		
P. Stand-by: 0 P. Stand-by in rete: 0 Int. Elettrica: 230 Vac 50Hz *LED power **Total flow exiting the appliance @Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source D Consider a reduction in output flow dell'8% by source LED 3000°K, e del 10% by source LED CRI>90								



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician

Request the replacement manual from our technical offices



Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician



On demand:

DALI



GLORY | sospensione




Linear bi-emission LED luminaire for suspended installations, body in powder coated aluminum profile, equipped with closing caps and suspension kit complete with cables L. 1500mm, screens in press-bent aluminum sheet to resume the lines of the beams in Varese model concrete. Suitable for lighting public and private environments. Thanks to the special anti-glare opal methacrylate diffuser, the luminaire is suitable for installation in workplaces where operators are present for long periods and where video terminals are used.

Source
LED module specially designed to ensure maximum uniformity and the total absence of point light.

Optics
Rotosymmetrical bi-emission (see table alongside) protected by an opal methacrylate screen designed to reduce glare. The luminaire is suitable for installation in workplaces UGR<19 (EN12464-1).


Power Supply
Electronic ballast integrated in the body of the fixture, available in the standard (on-off) and dimmable (DALI) versions. Power supply 220-240Vac 50/60Hz.

Note
Also available the version for wall installation.

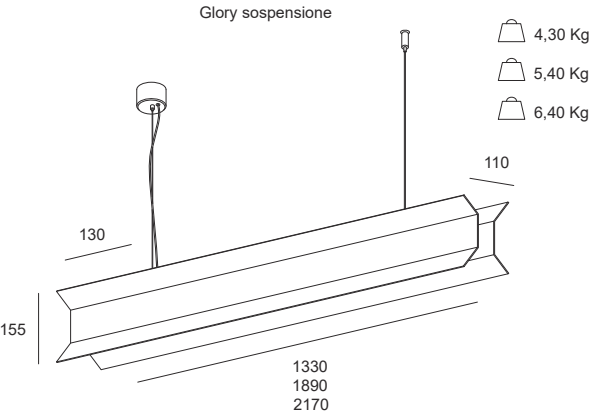


GLORY sospensione								
Sorgente Light source	Watt LED*	Lumen OUT**	L Lunghezza L Lenght	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	24+18W	6630	1330 mm	D A G	3.000° K 4.000° K	ON-OFF On demand DALI	Doppia emissione	white
LED	36+30W	9810	1890 mm	D A G				grey
LED	42+36W	11030	2170 mm	E A G				black corten

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source D, E
Consider a reduction in output flow dell'8% by source LED 3000°K



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician

Request the replacement manual from our technical offices



Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician



On demand:



GLORY IP | applique




Double emission LED fixture (uplight + downlight) for wall installation, suitable for enhancing elevations and cladding materials, the minimal design allows integration with any type of architecture. Body made of anodized aluminum alloy and subsequently powder coated to provide high resistance to atmospheric agents and UV rays, screen in press-bent aluminum sheet to reproduce the lines of the Varese model concrete beams. Diffusers in satin-finish tempered glass fixed by resin in a coplanar position to the body of the appliance to allow water and dirt to flow away, avoiding the formation of deposits which would significantly reduce the performance of the appliance. Wall fixing system using an aluminum alloy plate treated and painted in the same way as the lamp body. Can be installed on any flat surface by dowelling. Screws in stainless steel with a high molybdenum content. Sealing gaskets in annealed silicone.

Source
LED modules specially designed to ensure maximum uniformity and the total absence of point light.

Optics
Double roto-symmetrical emission (see table alongside), protected by satin-finish tempered glass screens.

Power Supply
Electronic ballast integrated in the body of the fixture, available in the standard version (on-off). Power supply 220-240Vac 50/60Hz.

Note
Also available the version for suspended installation.

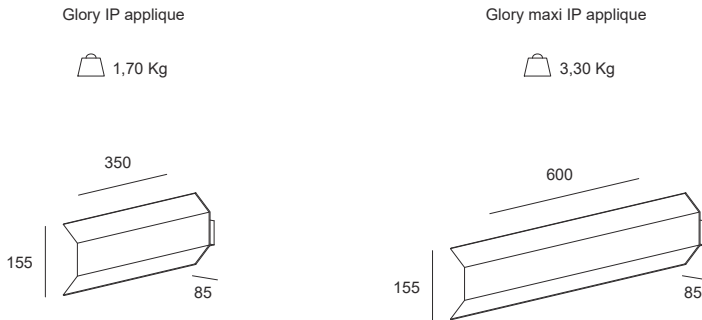


GLORY IP applique								
Sorgente Light source	Watt LED*	Lumen OUT**	L Lunghezza L Lenght	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	7W	667	350 mm		3.000° K	ON-OFF	Doppia Emissione	white
LED	20W	1517	600 mm					anthracite

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @ Tamb 25° - 3000°K ***This product contains an Energy Efficiency Class light source **D**

Connectors




Connectors IP




Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician

Request the replacement manual from our technical offices



Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician

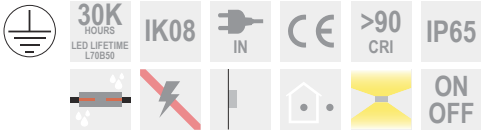

On demand:

