



ISIDORO




ISIDORO | sospensione

Cylindrical-shaped LED lighting body for suspension installation complete with rosette for fixing to the ceiling, perfect for illuminating paintings and portions of the room by drawing power from the electrical socket. Suitable for public and private exhibition environments where specific adjustments are necessary to enhance furnishing accessories. The lamp is adjustable in height, thanks to the possibility of shortening the cables, and the luminous flux can be adjusted as desired. The section of the lighting body is reduced to a minimum. Body in 1250mm long aluminum profile, powder coated. Passive dissipation system using an internal die-cast aluminum frame.

Source
LED module specially designed to ensure maximum lighting performance.


Optics
Rotosymmetrical (see table alongside) protected by an opal methacrylate screen designed to reduce glare.

Power supply
Electronic ballast integrated in the body of the fixture, available in the standard versions (on-off). Power supply 220-240Vac 50/60Hz.

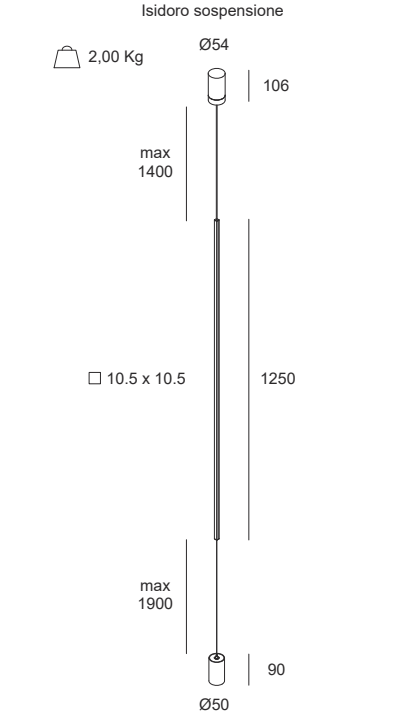


ISIDORO sospensione							
Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	12W	500	E A G	3.000° K 4.000° K	ON-OFF	Wide (70°)	black

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @ Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source E
Consider a reduction in output flow dell'8% by source LED 3000°K



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician

Request the replacement manual from our technical offices



Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician

