




JORGUZ

JORGUZ | proiettore da esterno

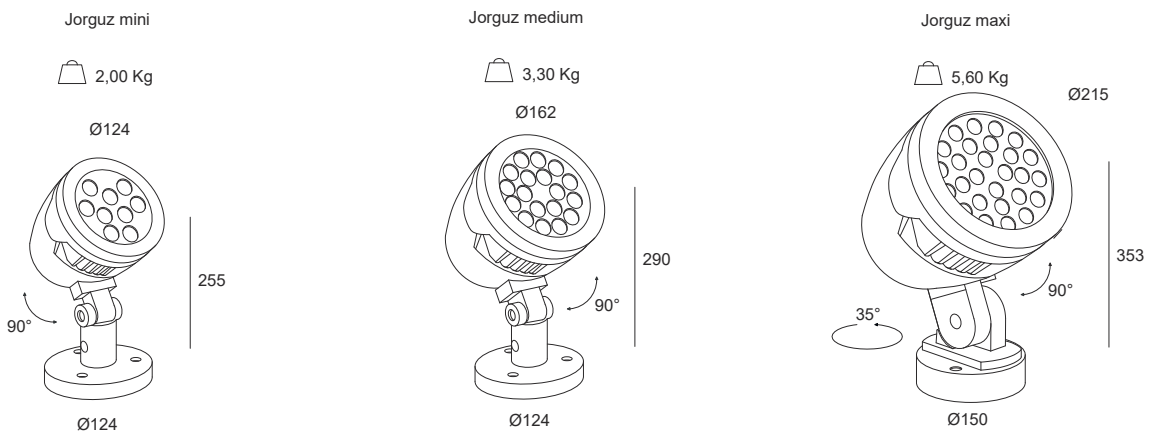

LED projector for wall and floor installation using plugs, suitable for lighting outdoor areas, gardens, parks and car parks. The optical compartment, the arm and the base are made of anodized aluminum alloy and subsequently powder coated to provide high resistance to atmospheric agents and UV rays, acts as a radiant surface and guarantees optimal heat dissipation. The projector can be adjusted in the vertical plane $\pm 90^\circ$ by means of a painted steel bracket equipped with mechanical locks that guarantee stable aiming of the light beam. Tempered extra-clear front protective glass (5mm thick) fixed by sealing gaskets in annealed silicone to avoid the formation of deposits that would significantly reduce the performance of the appliance. Stainless steel screws with a high molybdenum content. IP67 protection both on the product and on the cable using IP67 connectors.

Source
LED Chip On Board (COB) technology.

Optics
Roto-symmetrical optics available in various openings (see table opposite) treated by high vacuum metallization and protected by a tempered extra-clear safety glass screen.

Power supply
Electronic power supply integrated in the body of the fixture, available in the standard version (on-off). Power supply 220-240Vac 50 / 60Hz.

Note
We recommend the use of the SPD protection device, supplied by us upon request.


JORGUZ proiettore da esterno								
Sorgente Light source	Watt LED*	Lumen OUT**	ØDiametro mm ØDiameter mm	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	22W	2703	124	E	3.000° K 4.000° K	ON-OFF	Spot (18°) Medium (26°) Flood (45°)	light grey
LED	36W	4425	162	E				grey
LED	60W	7160	215	E				black

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @ Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source E
Consider a reduction in output flow dell'8% by source LED 3000°K


Connectors



On demand:



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician



Alimentatore non sostituibile
Non-replaceable power supply

Request the replacement manual from our technical offices







Guida all'ordine





JORGUZ | attacco singolo

Diametro palo <i>Pole diameter</i>	Altezza (H) attacco <i>Height (H) attachment</i>
Ø76	115

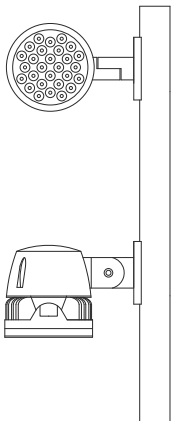

JORGUZ | attacco doppio

Diametro palo <i>Pole diameter</i>	Altezza (H) attacco <i>Height (H) attachment</i>
Ø76	115

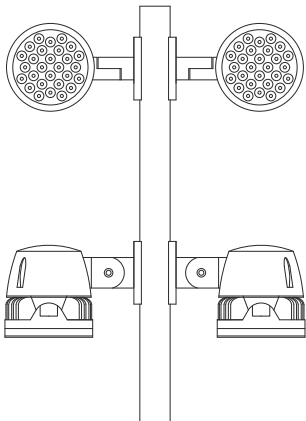

For updated technical data or further technical information, consult the website (www.xlitesrl.it)
For correct assembly of the appliance, consult the user manual