



KIND

ARCHITETTO GUIDO CANALI

KIND | profilo



LED projector for wall and ceiling installation using special brackets, suitable for illuminating elevations and facades, creating lighting effects of great value, useful for enhancing architecture. Frame in AISI 316L steel with polished finish, fixed to the lamp body by means of stainless steel clamping screws. Body in extruded anticorodal aluminum. The projector can be adjusted in the vertical plane $\pm 90^\circ$ by means of a steel bracket equipped with mechanical blocks which guarantee stable aiming of the light beam. The horizontal aiming takes place through the holes and slots the bracket is supplied with. Optical compartment closed at the top by an extra-clear glass screen (15mm thick) tempered and fixed by resin; it is coplanar with the body of the appliance to allow water and dirt to flow out, avoiding the formation of deposits that would significantly reduce the performance of the appliance.

Source
LED Chip On Board (COB) technology.

Optics
Roto-symmetrical optics available in various openings (see table opposite) treated by high vacuum metallization and protected by a tempered extra-clear safety glass screen.


Power supply
Electronic power supply (supplied as an accessory), available in the standard (on-off) and dimmable (DALI) version. Electronic ballast not supplied. Power supply 24Vdc

Note
Outgoing power cable with length L = 1000mm in 2x0.75mm² neoprene. IP65 protection both on the product and on the cable using IP65 connectors. The product is not suitable for installation in swimming pools and fountains. We recommend the use of the SPD protection device, supplied by us upon request.

Accessories
Electronic ballasts available in standard (on-off) and dimmable (DALI) versions, for single or multiple installations. Formwork for masonry installation.


Kind profilo

0,50 Kg

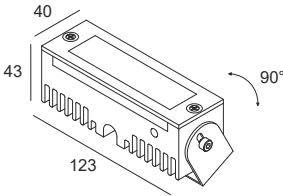


KIND profilo							
Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	4W	550	E A ↑ G	3.000° K 4.000° K	ON-OFF On demand DALI	Spot (15°) Wide flood (80°) Ellittica	Brushed stainless steel

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 24 Vdc
*LED power **Total flow exiting the appliance @ Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source E
Consider a reduction in output flow dell'8% by source LED 3000°K



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician

Richiedere il manuale di sostituzione ai nostri uffici tecnici



Alimentatore sostituibile
Power supply replaceable


Connectors



Socket-plug



3-way "T" type

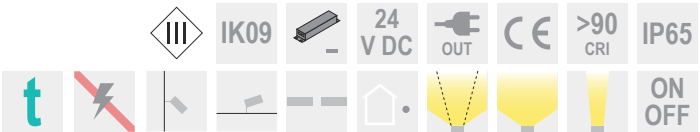

On demand:



For updated technical data or further technical information, consult the website (www.xlitesrl.it)



Portrait of a man in a green jacket, 1945, by [illegible]



Portrait of a man in a green jacket, 1945, by [illegible]



Portrait of a man in a yellow jacket and red scarf, 1945, by [illegible]



Portrait of a man in a dark vest, 1945, by [illegible]



Portrait of a man in a dark jacket, 1945, by [illegible]

KIND | incasso carrabile




LED luminaire for recessed lighting, which can be installed on the floor using the formwork (supplied as an accessory), suitable for illuminating elevations and facades, creating lighting effects of great value, useful for enhancing architecture and green areas. Frame in AISI 316L steel with satin finish, fixed to the lamp body by means of stainless steel clamping screws. Body in extruded anticorodal aluminum. The fixture is fixed to the formwork, made of galvanized aluminum sheet, by tightening the stainless steel screws. Optical compartment closed at the top by a tempered extra-clear glass screen (15mm thick) fixed by resin and coplanar to the luminaire body to allow water and dirt to flow, avoiding deposits that would significantly reduce the performance of the luminaire.

Source
LED Chip On Board (COB) technology.

Optics
Roto-symmetrical optics available in various openings (see table opposite) treated by high vacuum metallization and protected by a tempered extra-clear safety glass screen.


Power supply
Electronic power supply (supplied as an accessory), available in the standard (on-off) and dimmable (DALI) version. Electronic ballast not supplied. Power supply 24Vdc.

Note
Outgoing power cable with length L = 1000mm in 2x0.75mm² neoprene. IP65 protection both on the product and on the cable using IP65 connectors. The product is not suitable for installation in swimming pools and fountains. We recommend the use of the SPD protection device, supplied by us upon request.

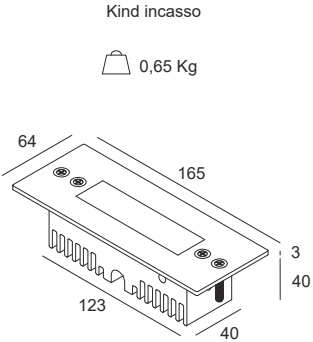

KIND incasso carrabile							
Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	4W	550	E A ↑ G	3.000° K 4.000° K	ON-OFF On demand DALI	Spot (15°) Wide flood (80°) Ellittica	Brushed stainless steel

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 24 Vdc
*LED power **Total flow exiting the appliance @ Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source E
Consider a reduction in output flow dell'8% by source LED 3000°K




Connectors




Socket-plug




3-way "T" type

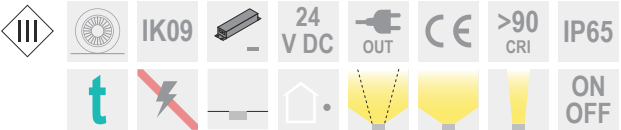

On demand:



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician



Alimentatore sostituibile
Power supply replaceable

Request the replacement manual from our technical offices

