

LEPANTO

LEPANTO | apparecchio da terra



Lighting fixture for pedestrian and vehicular paths with indirect emission, the minimal design and the lightness of the lamp body make it suitable for installation in outdoor environments. Lamp body in extruded and calendered aluminum profile, anodized and subsequently powder coated to provide high resistance to atmospheric agents and UV rays, ground fixing plate made of stainless steel. LED module protected by a screen in tempered extra-clear glass (thickness 3mm) and fixed by means of annealed silicone gaskets, which allow water and dirt to flow away, avoiding the formation of deposits. IP67 protection both on the product and on the cable using IP67 connectors.

Source
Chip On Board (COB) LED technology.


Optics
Rotosymmetrical optics (see table alongside) protected by a screen in tempered extra-clear safety glass.

Power supply
Electronic ballast integrated in the body of the fixture, available in the standard version (on-off). Power supply 220-240Vac 50/60Hz.

Note
We recommend the use of the SPD protection device, supplied by us upon request.

Lepanto 673mm

2,40 Kg

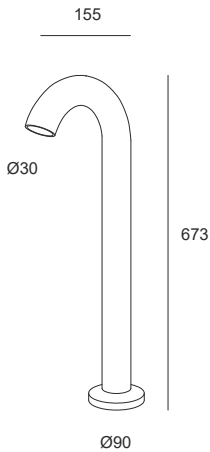

LEPANTO apparecchio da terra							
Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	4W	317	E A1G	3.000° K	ON-OFF	Wide (70°)	anthracite


P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @ Tamb 25° - 3000°K ***This product contains an Energy Efficiency Class light source E

Connectors




Socket-plug

3-way "T" type




Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician



Alimentatore non sostituibile
Non-replaceable power supply

Request the replacement manual from our technical offices

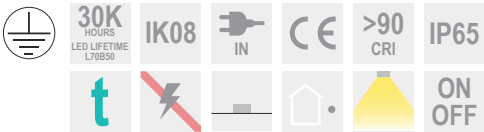

On demand:

SPD



For updated technical data or further technical information, consult the website (www.xlitesrl.it)