

LOGAN | applique




Direct emission LED fixture for wall installation. Suitable for enhancing elevations and cladding materials, the minimal design makes LOGAN perfectly integrated with any type of architecture. Lamp body made of anodized aluminum alloy and subsequently powder coated to provide high resistance to atmospheric agents and UV rays, it acts as a radiating surface and guarantees excellent heat dissipation. Tempered and silk-screened extra-clear protective front glass (thickness 5mm), fixed by means of resin, in a coplanar position to the body of the appliance to allow dirt to flow away, avoiding the formation of deposits which would significantly reduce the performance of the appliance. Screws in stainless steel with a high molybdenum content. Sealing gaskets in annealed silicone.

Source
Chip On Board (COB) LED technology.

Optics
Rotosymmetrical optic (see table alongside) treated by high vacuum metallization and protected by a screen in tempered extra-clear safety glass fixed by means of resin.

Power supply
Electronic ballast integrated in the body of the fixture, available in the standard version (on-off). Power supply 220-240Vac 50/60Hz.

Note
We recommend the use of the SPD protection device, supplied by us upon request.

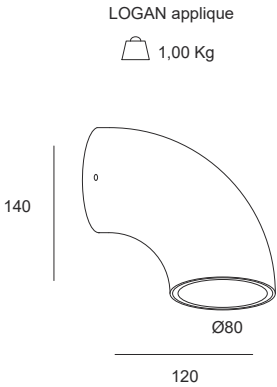


LOGAN applique							
Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	6W	386	E A G	3.000° K	ON-OFF	Wide flood (85°)	white anthracite

P. Stand-by: / | P. Stand-by in rete: / | Int. Elettrica: 230Vac
*LED power **Total flow exiting the appliance @Tamb 25° - 3000°K ***This product contains an Energy Efficiency Class light source E
Consider a reduction in output flow dell'8% by source LED 3000°K

Connectors




Connectors IP




Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician

Request the replacement manual from our technical offices



Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician

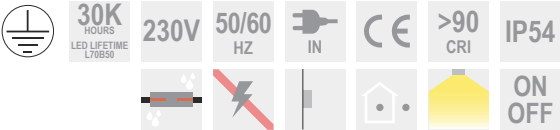

On demand:

SPD



For updated technical data or further technical information, consult the website (www.xlitesrl.it)