

PANDORA | plafone



LED luminaire for ceiling installation. Main body in transparent borosilicate glass (Pyrex), lamp body in powder-coated extruded aluminum, with a diameter of 90mm for the 12W version. Passive dissipation system using an internal die-cast aluminum frame.

Source
Chip On Board (COB) LED technology.


Optics
Rotosymmetrical optics available in various apertures (see table alongside) treated by high vacuum metallization and protected by a polycarbonate screen with a “frost” satin effect designed to reduce glare.

Power supply
Electronic ballast integrated in the body of the fixture, available in the standard (on-off) and dimmable (DALI) versions. Power supply 220-240Vac 50/60Hz.

Note
Also available the suspended version.


Pandora a plafone

3,90 Kg

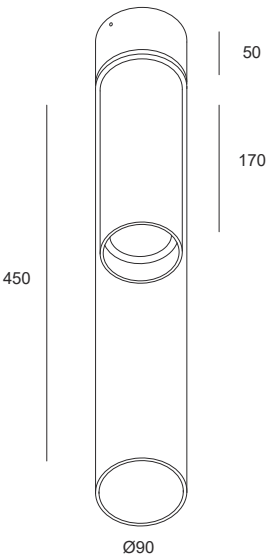


PANDORA plafone								
Sorgente Light source	Watt LED*	Lumen OUT**	ØDiametro mm ØDiameter mm	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
COB LED	12W	1700	90	E A A G	3.000° K 4.000° K	ON-OFF On demand DALI	Spot (15°) Medium (40°) Wide (70°)	white grey black corten

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source E
Consider a reduction in output flow dell'8% by source LED 3000°K, e del 10% by source LED CRI>90



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician



Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician

Request the replacement manual from our technical offices



On demand:



PANDORA | sospensione



LED luminaire for suspended installation. Main body in transparent borosilicate glass (Pyrex), lamp body in powder-coated extruded aluminum, with a diameter of 90mm for the 12W version. Passive dissipation system using an internal die-cast aluminum frame. Complete with 1500mm long steel suspension cable with micro-regulation system and color-coordinated cylindrical ceiling rose.


Source
Chip On Board (COB) LED technology.

Optics
Rotosymmetrical optics available in various apertures (see table alongside) treated by high vacuum metallization and protected by a polycarbonate screen with a “frost” satin effect designed to reduce glare.


Power supply
Electronic ballast integrated in the body of the fixture, available in the standard (on-off) and dimmable (DALI) versions. Power supply 220-240Vac 50/60Hz.

Note
White, black or transparent power cord depending on the color of the body. Also available in the ceiling mounted version.

Pandora sospensione orizzontale

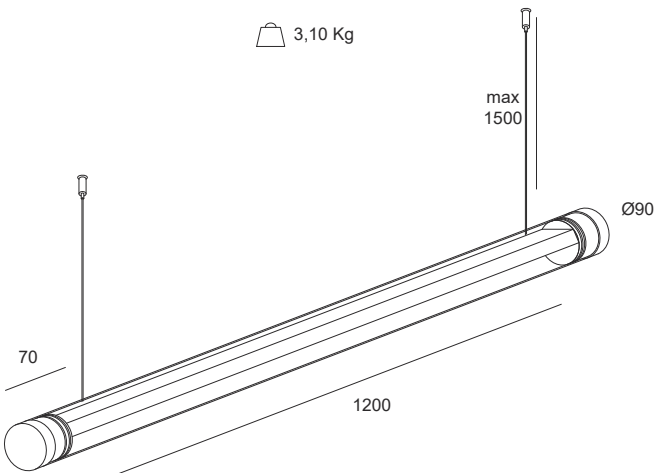

Pandora a sospensione

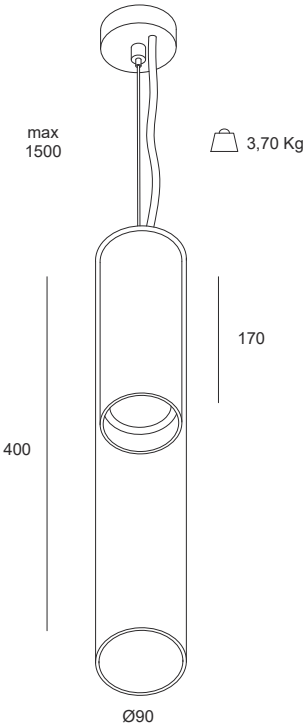

PANDORA verticale | sospensione


Sorgente Light source	Watt LED*	Lumen OUT**	ØDiametro mm ØDiameter mm	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
COB LED	12W	1700	90	E A G	3.000° K 4.000° K	ON-OFF On demand DALI	Spot (15°) Medium (40°) Wide (70°)	white grey black corten

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source E
Consider a reduction in output flow dell'8% by source LED 3000°K, e del 10% by source LED CRI>90


PANDORA orizzontale | sospensione

Sorgente Light source	Watt LED*	Lumen OUT**	L Lunghezza L Lenght	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission
LED	40W	5600	1200 mm	E A G	3.000° K	ON-OFF On demand DALI	Wide flood (105°)


P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @Tamb 25° - 3000°K ***This product contains an Energy Efficiency Class light source E

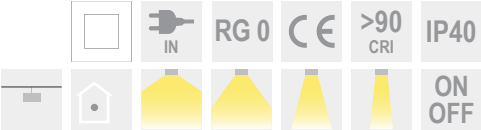

On demand:



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician



Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician

Request the replacement manual from our technical offices

