




PANDORA

PANDORA | Ceiling

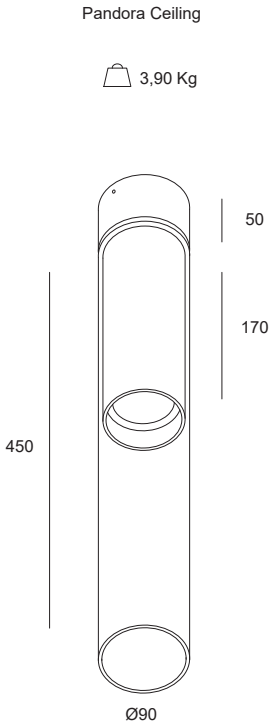


PANDORA Ceiling				
Watt*	Lumen**	øDiameter mm	K	Emission
12W	1700	90	3000 K 4000 K	Spot (15°) Medium (40°) Flood (70°)

Standby Power: 0 | Mains Standby Power: 0 | Power Supply: 230 Vac 50Hz
*LED Power **Total Luminaire Output @Tamb 25° - 4000°K
Consider an 8% reduction in output flux for 3000°K LED sources



PANDORA | Pendant

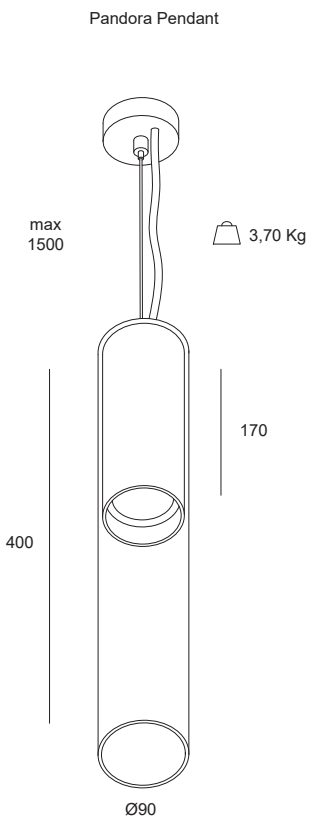

PANDORA Pendant				
Watt*	Lumen**	ØDiameter mm	K	Emission
12W	1700	90	3000 K 4000 K	Spot (15°) Medium (40°) Flood (70°)

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*Potenza dei LED **Flusso totale in uscita dall'apparecchio @Tamb 25° - 4000°K
Considerare una riduzione del flusso in uscita dell'8% per sorgente LED 3000°K

