



PITAGORICO

PITAGORICO | applique




Direct emission LED fixture for wall installation, particularly suitable for use in museums or in particular projects in which the intention is to enhance ceilings and frescoes. Linear body made of powder-coated extruded aluminum with a 30x40mm section. In the upper part there are three directional projectors (6W) of diam. 39mm. The minimal design makes the device light and extremely versatile for various uses.

Source
The LED DOB (driver on board) electronics means that the luminaire does not need a power supply.
Direct emission using Chip On Board (COB) LED technology 6W@350mA.

Optics
Direct emission through rotosymmetrical optic available (see table alongside) treated by high vacuum metallization and protected by a screen in tempered extra-clear safety glass fixed by resin.


Power supply
Electronic ballast integrated in the body of the fixture, available in the standard (on-off) and dimmable (DALI) versions. Power supply 220-240Vac 50/60Hz.

Note
On request it is possible to add a spot light in the lower part of the vertical support.

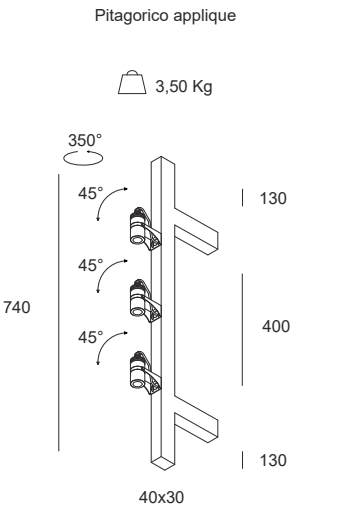


PITAGORICO applique							
Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	18W	1800		3.000° K 4.000° K	ON-OFF	Wide (60°)	white grey black corten

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 350mA
*LED power **Total flow exiting the appliance @Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source E
Consider a reduction in output flow dell'8% by source LED 3000°K, e del 10% by source LED CRI>90



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician



Alimentatore sostituibile
Power supply replaceable

Request the replacement manual from our technical offices



For updated technical data or further technical information, consult the website (www.xlitesrl.it)