


POLDO



POLDO OPAL | proiettore da esterno

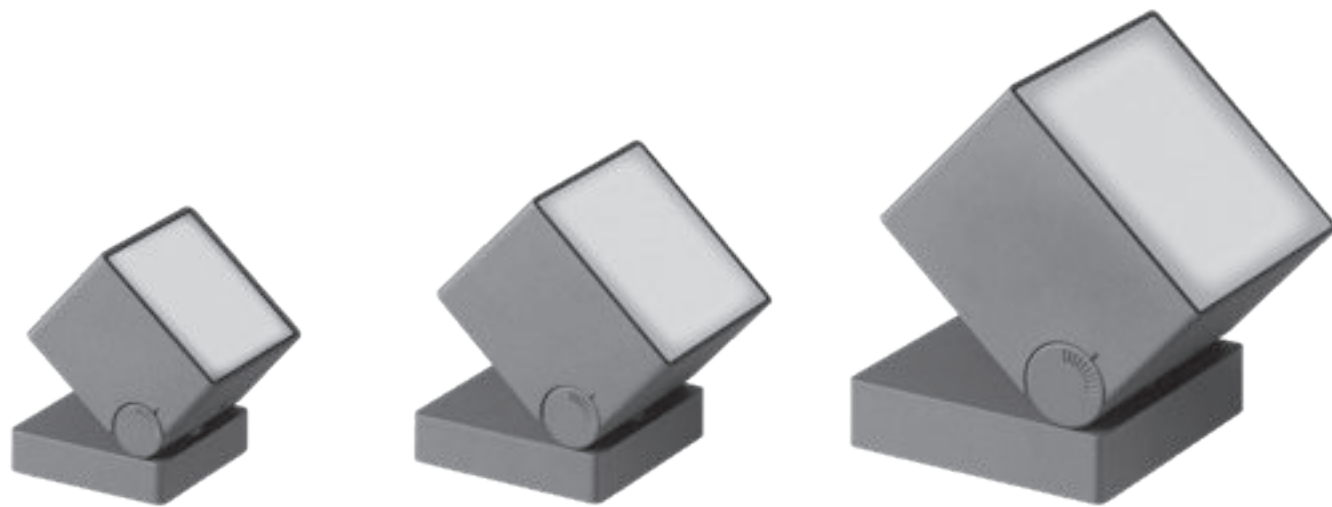

LED projector for wall and floor installation using dowels, suitable for lighting outdoor areas, gardens, parks and car parks. The fixture is made of anodized aluminum alloy and subsequently powder coated to provide high resistance to atmospheric agents and UV rays, it acts as a radiating surface and guarantees excellent heat dissipation. The projector can be adjusted vertically by 90° by means of a painted steel bracket and fitted with mechanical blocks which guarantee stable pointing of the light beam and by 120° on the horizontal plane. Tempered opal protective front glass (thickness 5mm) fixed by annealed silicone sealing gaskets to prevent the formation of deposits which would significantly reduce the performance of the appliance. Screws in stainless steel with a high molybdenum content. Sealing gaskets in annealed silicone. IP67 protection both on the product and on the cable using IP67 connectors.

Source

Chip On Board (COB) LED technology.

Optics


Rotosymmetrical optics (see table alongside) treated by high vacuum metallization and protected by a tempered opal protective glass screen.

Power supply

Electronic ballast integrated in the body of the fixture, available in the standard version (on-off). Power supply 220-240Vac 50/60Hz.

Note

We recommend the use of the SPD protection device, supplied by us upon request.

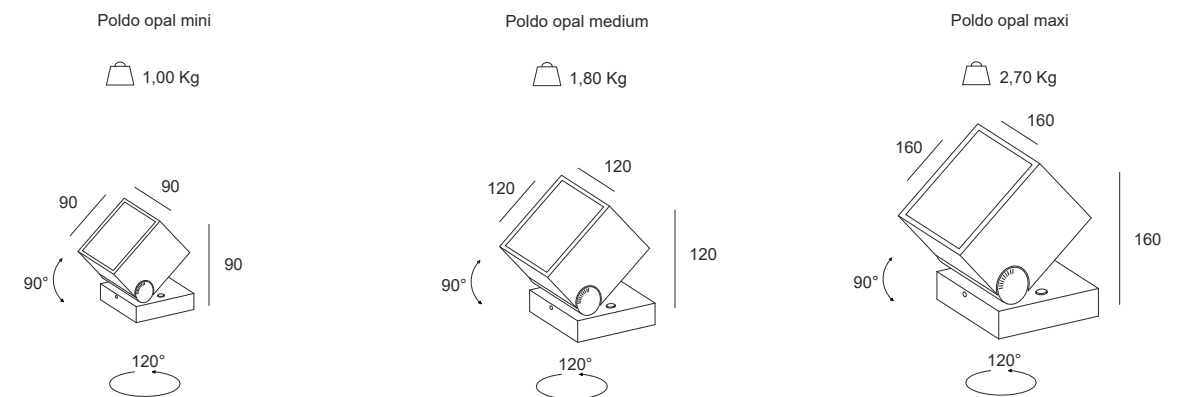

POLDO OPAL proiettore da esterno								
Sorgente <i>Light source</i>	Watt LED*	Lumen OUT**	L Lunghezza <i>L Lenght</i>	Classe Energetica <i>Energy rating***</i>	K	Alimentazione <i>Power supply</i>	Emissione <i>Emission</i>	Colore <i>Colour</i>
LED	8W	720	90		3.000° K	ON-OFF	Spot (14°) Medium (30°) Flood (45°)	white
LED	17.5W	1800	120					anthracite
LED	28W	3020	160					black

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
 *LED power **Total flow exiting the appliance @ Tamb 25° - 3000°K ***This product contains an Energy Efficiency Class light source F
 Consider a reduction in output flow dell'8% by source LED 3000°K

Picket




Connectors



Socket-plug




3-way "T" type

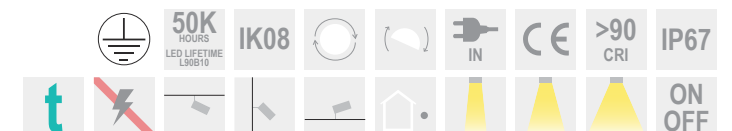

On demand:



Sorgente LED sostituibile solo
da tecnico abilitato
LED source replaceable only
by a qualified technician



Alimentatore non sostituibile
Non-replaceable power supply

Request the replacement manual from our technical offices

CATALOGO **XLITE 2023** | www.xlitesrl.it

For updated technical data or further technical information, consult the website (www.xlitesrl.it)

