




SIMBA | External projector



SIMBA External projector				
Watt*	Lumen**	øDiameter mm	K	Emission
10W	1098	71	3000 K 4000 K	Spot (20°) Medium (35°) Wide (60°)
20W	2696	100		
30W	4109	135		
42W	5106	165		
Standby Power: 0 Mains Standby Power: 0 Power Supply: 230 Vac 50Hz *LED Power **Total Luminaire Output @Tamb 25° - 4000°K Consider an 8% reduction in output flux for 3000°K LED sources				

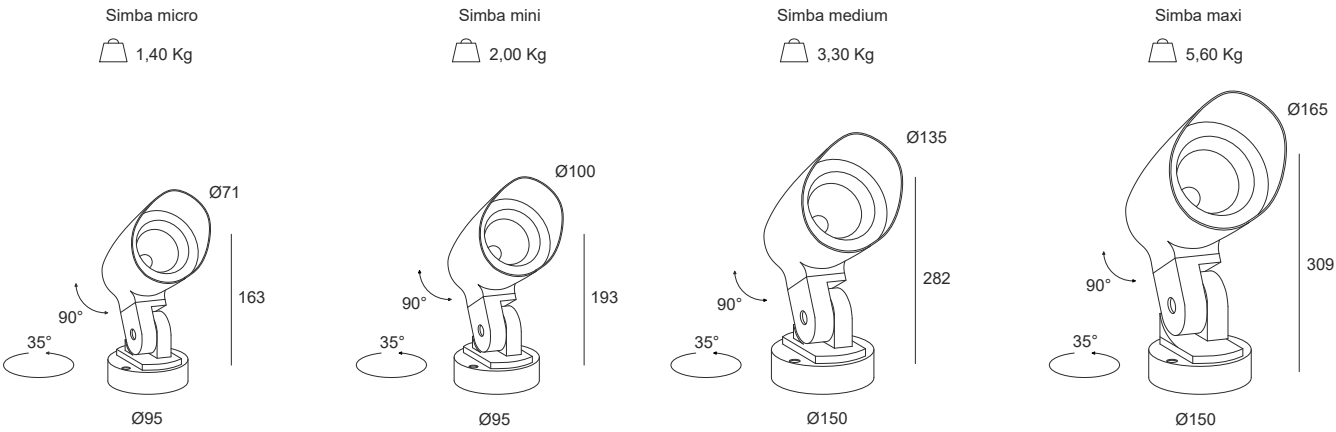

Colours




Charateristics







Order guide

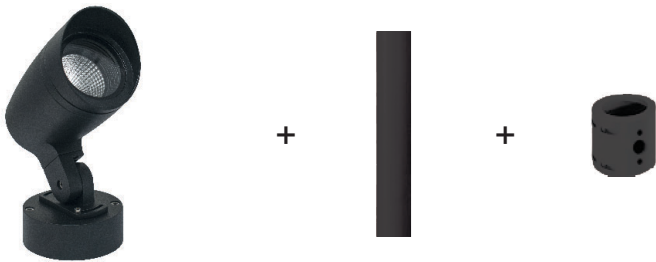



SIMBA | Single attack

Pole Diameter	Attach Height
Ø76	115

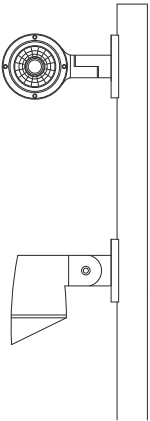


SIMBA | Double attack

Pole Diameter	Attach Height
Ø76	115

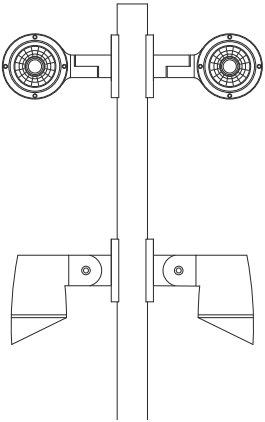



SIMBA RGB | External projector

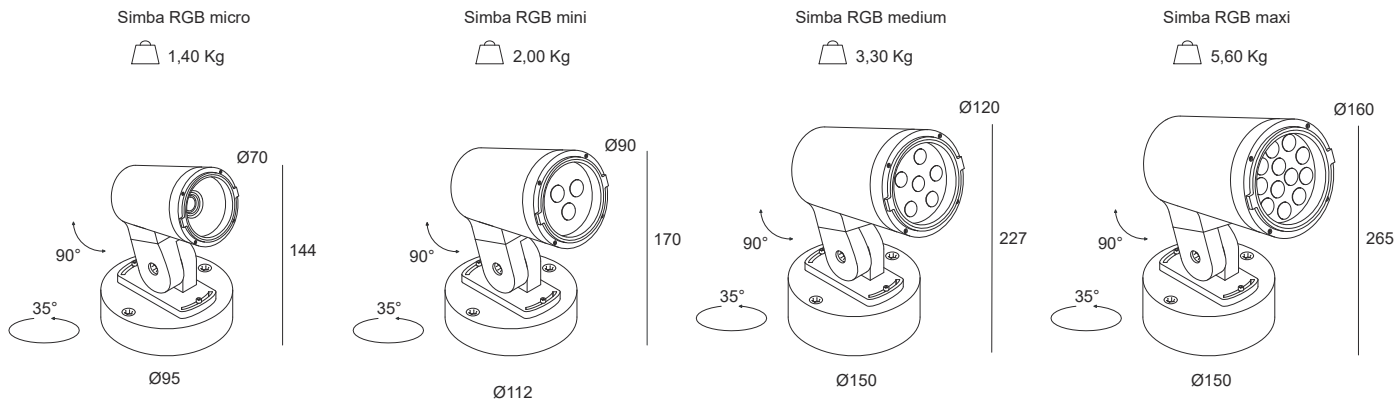

SIMBA RGB External projector				
Watt*	Lumen**	Dimensions mm	K	Emission
9W	810	70	RGB	Spot (25°)
18W	1340	90		
25W	1870	120		
45W	3270	160		

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 24Vdc
*Potenza dei LED **Flusso totale in uscita dall'apparecchio @Tamb 25° - 4000°K
Considerare una riduzione del flusso in uscita dell'8% per sorgente LED 3000°K



Colour



Charateristics

