



SIVIGLIA

SIVIGLIA | stradale



LED luminaire for road use or in green areas, equipped with a 3000mm high pole for urban lighting and private outdoor areas. The luminaire is made of anodized aluminum and subsequently powder coated to provide high resistance to atmospheric agents and UV rays. The projector is equipped with different models of extra clear PMMA optics according to the required use. Tempered extra-clear protective front glass fixed by means of annealed silicone sealing gaskets and circular ring nut. Screws in stainless steel with a high molybdenum content.


Source
LED module specially designed to ensure maximum uniformity.

Optics
Optic available (see table alongside) in extra clear PMMA and protected by a screen in tempered extra clear safety glass.


Power supply
Electronic ballast integrated in the body of the fixture, available in the standard (on-off) and dimmable (DALI) version. Power supply 220-240Vac 50/60Hz. Protection against 10kV external discharges.

Note
Outgoing power supply cable length L=400mm. IP65 protection on both the product and the cable using IP65 connectors. Available in both single and double emission versions. IP67 protection both on the product and on the cable using IP67 connectors. We recommend the use of the SPD protection device, supplied by us upon request.

A request
Anchor bolt plate




Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician




Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician

Request the replacement manual from our technical offices

Siviglia 1 stradale

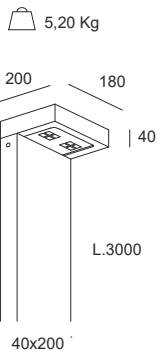


Siviglia 2 stradale

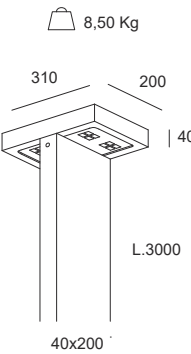

SIVIGLIA stradale								
Sorgente Light source	Watt LED*	Lumen OUT**	L Lunghezza L Lenght	Classe Energetica Energy rating***	K	Alimentazione Power supply	Ottiche Optics	Colore Colour
LED	18W	2124	200 mm		3.000° K 4.000° K	ON-OFF	Ultra wide (130°)	white
LED	36W	4248	310 mm					A RICHEISTA DALI
P. Stand-by: 0 P. Stand-by in rete: 0 Int. Elettrica: 230 Vac 50Hz *LED power **Total flow exiting the appliance @ Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source F								

On demand



Connectors



Socket-plug



3-way "T" type



On demand:

