



TANGERI

TANGERI | incasso




Recessed LED luminaire, suitable for lighting residential and commercial outdoor environments, always guaranteeing perfect lighting while maintaining high visual comfort. Body and passive dissipation system made of anodized aluminum alloy and subsequently powder coated to provide high resistance to atmospheric agents and UV rays. Ceiling fixing system using special stainless steel screws complete with aluminum alloy hooking supports. Can be installed on CGS false ceilings with a thickness of 12÷30mm. Preparation hole in the false ceiling $\varnothing=150\text{mm}$ (mini version) and $\varnothing=160\text{mm}$ (maxi version).

Source
Chip On Board (COB) LED technology.

Optics
Rotosymmetrical optics (see table alongside) treated by high vacuum metallization and protected by a tempered glass screen.

Power supply
Electronic ballasts available in the standard (on-off) and dimmable (DALI) version, for single or multiple installations.


Note
We recommend the use of the SPD protection device, supplied by us upon request.

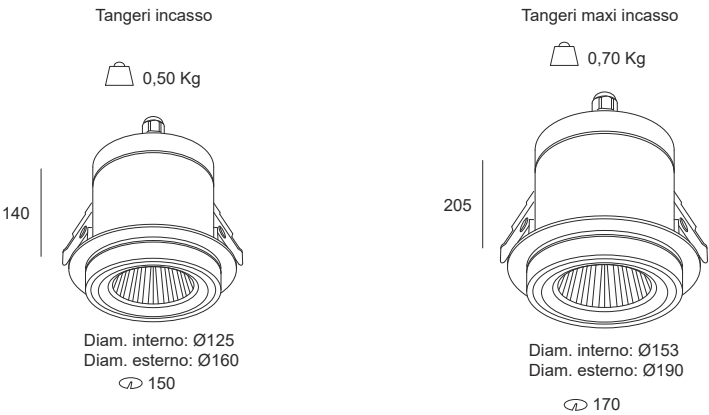


TANGERI incasso									
Sorgente Light source	Watt LED*	Lumen OUT**	ØDiametro mm ØDiameter mm	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour	
LED	28W	4002	160		3.000° K 4.000° K	ON-OFF	Spot (20°) Medium (35°) Wide (60°)	white	
LED	35W	5107	190					grey anthracite	

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @Tamb 25° - 3000°K ***This product contains an Energy Efficiency Class light source D, E


Connectors

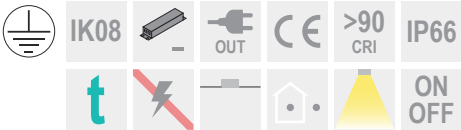

On demand:



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician



Alimentatore sostituibile
Power supply replaceable

Request the replacement manual from our technical offices

