



TILLY

STUDIO ARCHEA - ARCHITETTO MARCO CASAMONTI

TILLY | plafone




Cylindrical LED luminaire for ceiling installation complete with plate for fixing to the ceiling, suitable for public and private exhibition areas where specific aiming is required to enhance furnishing accessories. Body in aluminum profile 400mm, 800mm and 1200mm long, powder coated, with 40mm diameter. Passive dissipation system through internal die-cast aluminum frame.

Source
LED Chip On Board (COB) technology.


Optics
Roto-symmetrical optics (see table opposite) treated by high vacuum metallization.

Power supply
Electronic power supply integrated in the body of the fixture, available in standard (on-off) and dimmable (DALI) versions. Power supply 220-240Vac 50 / 60Hz.


Note
Also available in the version for suspended installation.

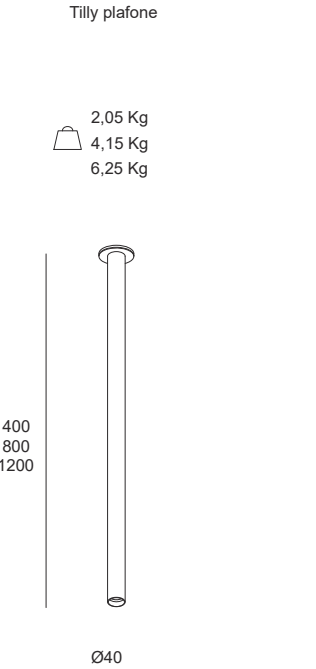

TILLY plafone								
Sorgente Light source	Watt LED*	Lumen OUT**	ØDiametro mm ØDiameter mm	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	5W	500	40	E A G	3.000° K 4.000° K	ON-OFF	Spot (15°) Medium (30°)	white grey black
P. Stand-by: 0 P. Stand-by in rete: 0 Int. Elettrica: 230 Vac 50Hz *LED power **Total flow exiting the appliance @Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source E Consider a reduction in output flow dell'8% by source LED 3000°K								



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician



Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician


Request the replacement manual from our technical offices



For updated technical data or further technical information, consult the website (www.xlitesrl.it)



TILLY | sospensione

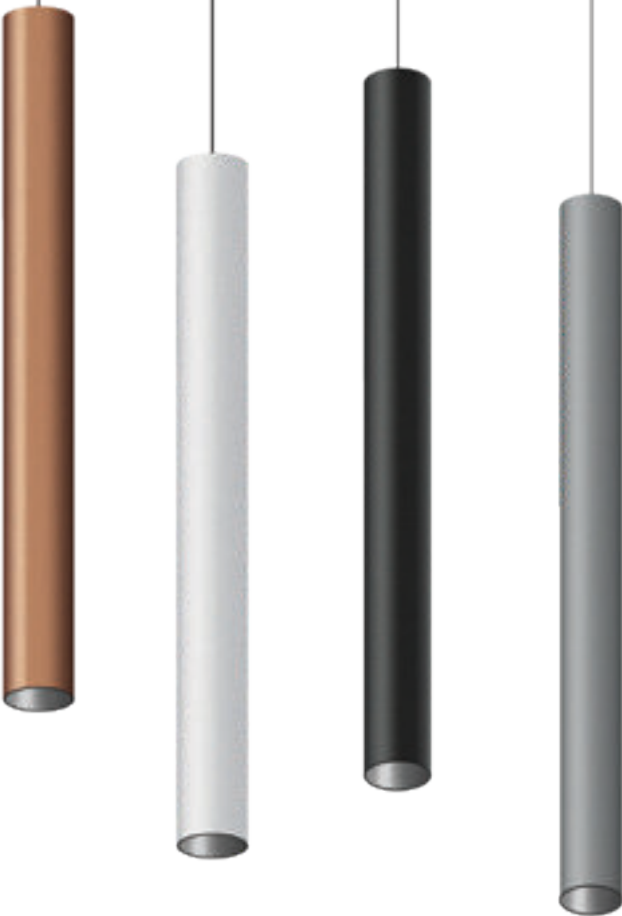


Cylindrical LED luminaire for suspended installation complete with ceiling rose and suspension kit with cable L.1500mm, suitable for public and private exhibition environments where specific points are required to enhance furnishing accessories. Body in aluminum profile 400mm, 800mm and 1200mm long, powder coated, with 40mm diameter. Passive dissipation system through internal die-cast aluminum frame.

Source
LED Chip On Board (COB) technology.

Optics
Roto-symmetrical optics (see table opposite) treated by high vacuum metallization.


Power Supply
Electronic power supply integrated in the body of the fixture, available in standard (on-off) and dimmable (DALI) versions. Power supply 220-240Vac 50 / 60Hz.

Note
The version for ceiling installation is also available.

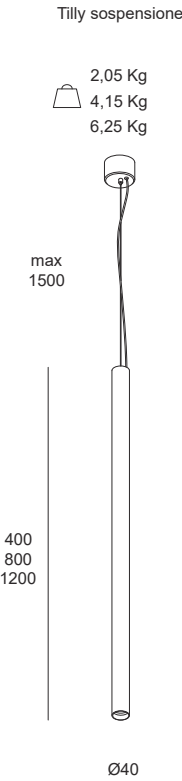


TILLY sospensione								
Sorgente Light source	Watt LED*	Lumen OUT**	ØDiametro mm ØDiameter mm	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	5W	500	40	E A G	3.000° K 4.000° K	ON-OFF	Spot (15°) Medium (30°)	white grey black

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @ Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source E
Consider a reduction in output flow dell'8% by source LED 3000°K



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician

Request the replacement manual from our technical offices



Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician





