




ULISSE

ULISSE | applique

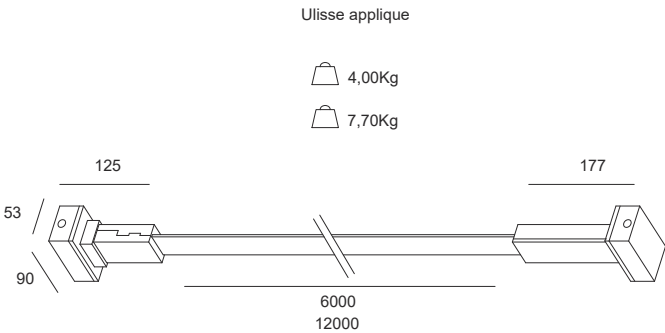

LED decorative luminaire with indirect light emission, composed of a strip of just 18mm made of a special metal alloy with a high dissipating capacity covered in black soft touch silicone. Wall-to-wall installable up to 12 meters in length. The luminaire looks like a simple line with very small dimensions, allowing only the light emitted to be perceived. The fixing to the wall takes place by means of special anchors equipped with a tensioning system.

Source
LED module with double-sided copper Kapton® PCB and gold-plated printed circuits, specially designed to guarantee maximum uniformity and the total absence of point light.

Optic
Rotosymmetric emission (see table alongside) protected by a layer of opal resin designed to reduce glare. The luminaire is suitable for installation in workplaces UGR<19 (EN12464-1).

Power Supply
Supplied electronic ballast available in the standard version (on-off). 48Vdc power supply.

Note
The maximum feedable length is 12m. Power supply box with wall attachment available on request.

Accessories
Electronic ballast available in the standard version (on-off).

ULISSE applique									
Led/mt	W / Mt	Lm / mt	L Lunghezza L Lenght	Classe Energetica Energy rating***	K	Alimentazione Power supply	Tensione Vcc	Emissione Emission	Colore Colour
120	7.6W	840 lm	6000		3.000° K 4.000° K	ON-OFF	48 V	Ultra wide (180°)	black
120	7.6W	840 lm	12000						

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 48 Vdc
*LED power **Total flow exiting the appliance @ Tamb 25° - 4000°K ***This product contains an Energy Efficiency Class light source F
Consider a reduction in output flow dell'8% by source LED 3000°K

On demand



Scatola porta
alimentatore

50K
HOURS
LED LIFETIME
L90B10

48
V DC

OUT

>90
CRI


IP20

ON
OFF



Sorgente LED non sostituibile
Non-replaceable LED source

Request the replacement manual from our technical offices



Alimentatore sostituibile solo da
tecnico abilitato
Power supply replaceable only
by a qualified technician

