




ZORRO

ZORRO | applique

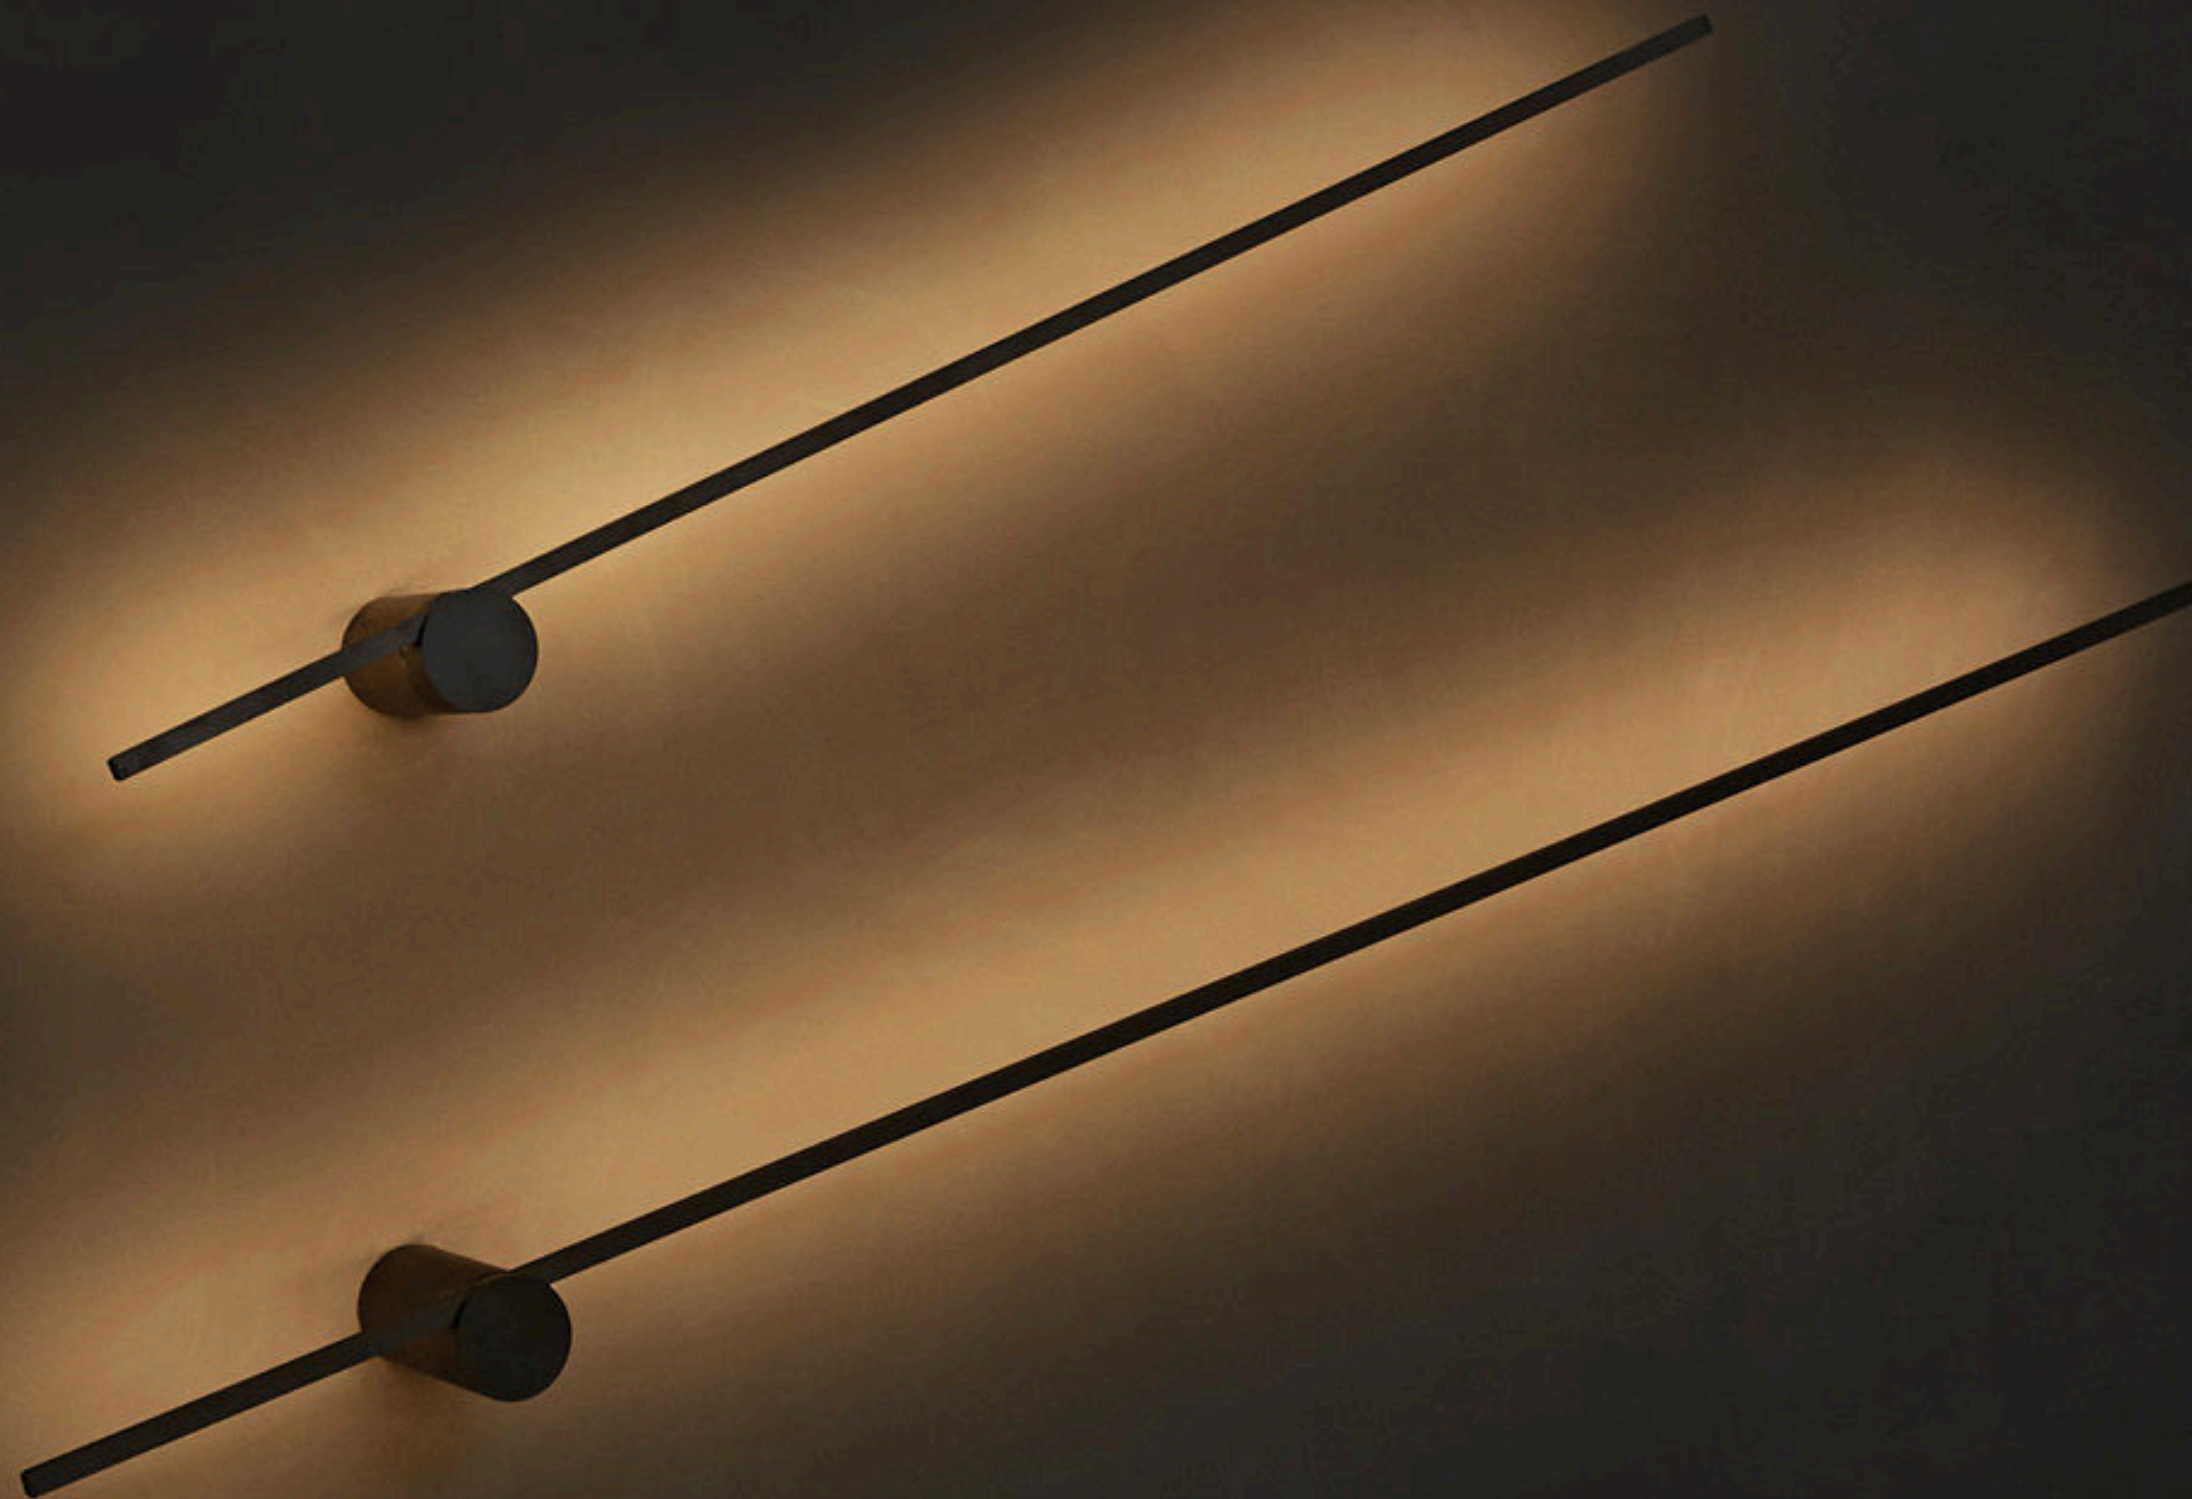


LED luminaire with indirect light emission for wall installation. Linear body made of powder-coated extruded aluminum that can be rotated by 350° using the wall attachment body as a fulcrum (diam.55mm). Wall lamp particularly suitable for illuminating private residences, commercial activities or exhibition spaces. The minimal design makes the device light and extremely versatile for various uses.

Source
LED modules specially designed to ensure maximum uniformity and the total absence of point light.


Optics
Indirect rotosymmetric emission (see table alongside) protected by an anti-glare screen in opal methacrylate designed to reduce glare.

Power Supply
Electronic ballast integrated in the body of the fixture, available in the standard version (on-off). Power supply 220-240Vac 50/60Hz.

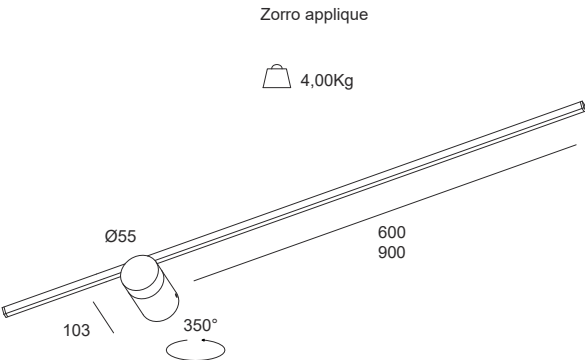


ZORRO applique								
Sorgente Light source	Watt LED*	Lumen OUT**	L Lunghezza L Lenght	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	7W	600	600 mm	G A G	3.000° K 4.000° K	ON-OFF	Wide flood (110°)	white
LED	9W	780	900 mm	G A G				black

P. Stand-by: 0 | P. Stand-by in rete: 0 | Int. Elettrica: 230 Vac 50Hz
*LED power **Total flow exiting the appliance @ Tamb 25° - 3000°K ***This product contains an Energy Efficiency Class light source **G**



Sorgente LED sostituibile solo da tecnico abilitato
LED source replaceable only by a qualified technician



Alimentatore sostituibile solo da tecnico abilitato
Power supply replaceable only by a qualified technician

Request the replacement manual from our technical offices



