

LAPPOGGING

LAPPOGGING | applique



LED luminaire for wall installation, with indirect emission. The minimal design makes LAPPOGGING perfectly integrated with any type of architecture. Lamp body made of anodized aluminum alloy and subsequently powder coated to provide high resistance to atmospheric agents and UV rays, it acts as a radiating surface and guarantees excellent heat dissipation. Screws in stainless steel with a high molybdenum content. Sealing gaskets in annealed silicone.


Source
Chip On Board (COB) LED technology.

Optics
Rotosymmetrical optic (see table alongside) treated by high vacuum metallization and protected by an extra-clear polycarbonate protection screen.

Power supply
Electronic ballast integrated in the body of the fixture, available in the standard version (on-off). Power supply 220-240Vac 50/60Hz.

Note
We recommend the use of the SPD protection device, supplied by us upon request.

Lappogging applique

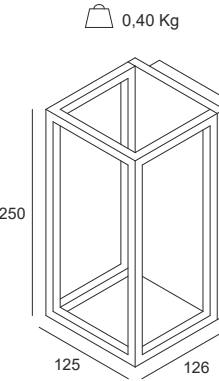


LAPPOGGING applique							
Sorgente Light source	Watt LED*	Lumen OUT**	Classe Energetica Energy rating***	K	Alimentazione Power supply	Emissione Emission	Colore Colour
LED	7W	212	G A + G	3.000° K	ON-OFF	Wide (67°)	anthracite

P. Stand-by: / | P. Stand-by in rete: / | Int. Elettrica: 230Vac
*LED power **Total flow exiting the appliance @ Tamb 25° - 3000°K ***This product contains an Energy Efficiency Class light source G
Consider a reduction in output flow dell'8% by source LED 3000°K


Connectors



Connettori IP




Sorgente LED non sostituibile
Non-replaceable LED source



Alimentatore sostituibile solo da
tecnico abilitato
Power supply replaceable only
by a qualified technician

Request the replacement manual from our technical offices

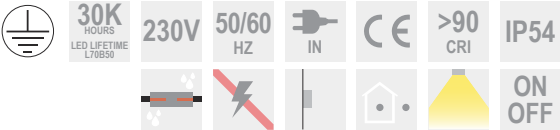

On demand:

